


06 Downlights Fixed LED>The 3-12W Round Recessed Panels Die cast

10103FA/W/W

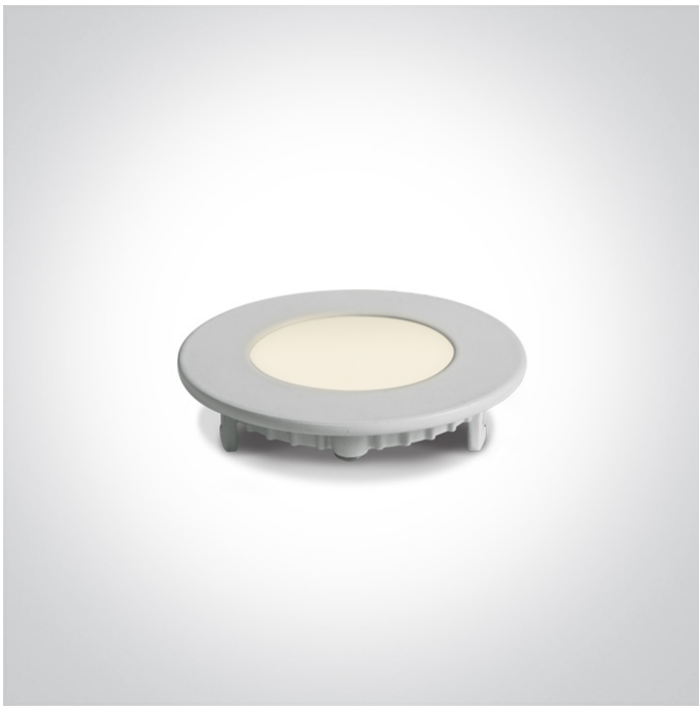

3W slim downlight LED, IP40, ideal for commercial applications such as offices, galleries and showrooms.

Supplied with 300mA non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.




## Downloads



## Dimensions



## Gallery






## Physical Specification


Item Group	06 Downlights Fixed LED
Family	The 3-12W Round Recessed Panels Die cast
Order Code	10103FA/W/W
Colour	White
Material	Die Cast
Diffuser Material	Acrylic
Shape	Circular

Height	22mm
Diameter	85mm
Cutout Hole Diameter	70mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No


## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	3W
IP Rating	IP40
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	9V
Safety Class	
Power(Watts)	2,7W
IP Rating	IP40
Light Source	LED built in
LED Type	SMD 2835

LED Brand	Epistar
LED Number	15
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	2,4-3,6W
Power Factor	0,6
Constant Current	Yes
300mA	8-12V DC
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	50°C
Operating Temp	75°C
Housing Material	Plastic
Brand	Lifud

#### Illumination Data

Colour Temperature	3000K
Lumen Output	180lm
Light Efficiency	60lm/W
CRI	80
Beam Angle	120°
Illumination Diagram	

#### Packing Info

Box Length	14,2cm
------------	--------

Box Width	3,1cm
Box Height	4cm
Box Weight	0,170Kg
Pcs/Carton	60
Barcode	5291889042730
HS Code	9405109890

#### Certification & Warranty

Warranty	2 Years
Average Lifetime	30000 hours
Weee Directive	Yes

switch to  
**one light!**

one  
LIGHT

