

INSTALLATION MANUAL

7862

ecostrip











230V | SMD 5730 | 120LEDs/m | 13W/m | IP65 | PVC

Requires 7862P power supply.
Supplied in 30m roll.
Cut every 1m.

one
LIGHT

INSTALLATION:

- The LED strip can be cut every 1m at the clearly marked positions. Cut carefully at the desired length by using a sharp pair of scissors.
- To seal the non-powered end of the LED strip, use the 7862E end cup.
- Install the 2-pin male connector to the LED strip and connect it to the 7862P power supply. Plug the power supply into the AC outlet.
- To connect two LED strips together use the 7862C connector.
- To connect in a corner two LED strips use the 7862L corner.
- To seal all connections use the 7862R shrinking sleeve to secure the LED strip.
- Use the 7862F fixing clip to secure the LED strip into the required position.

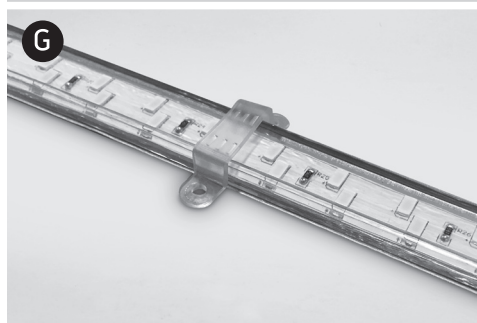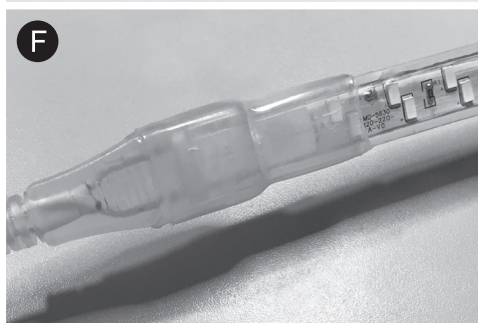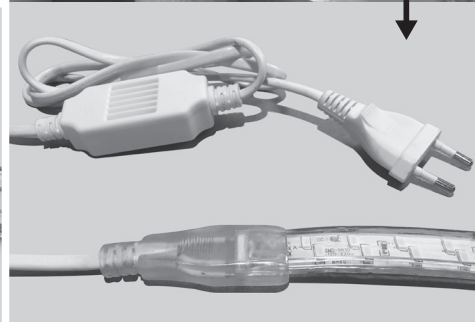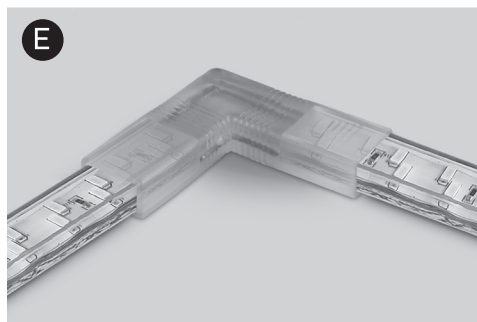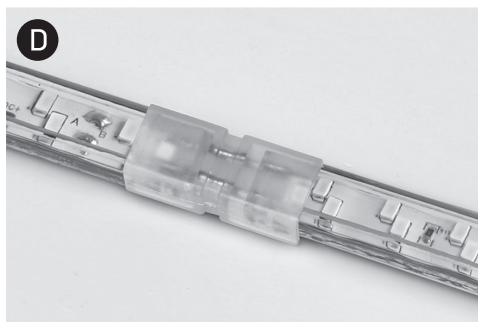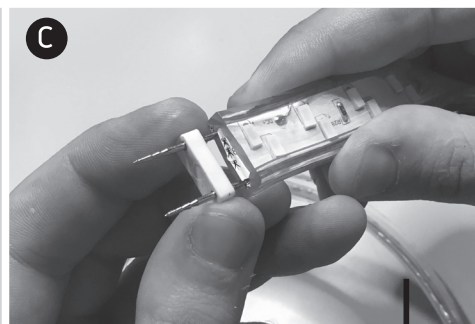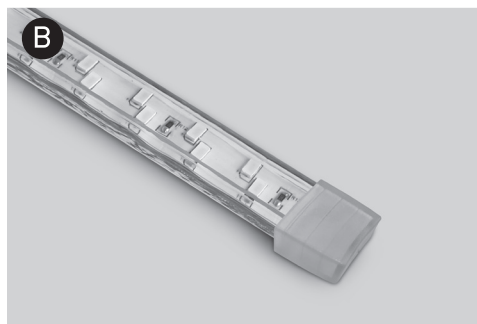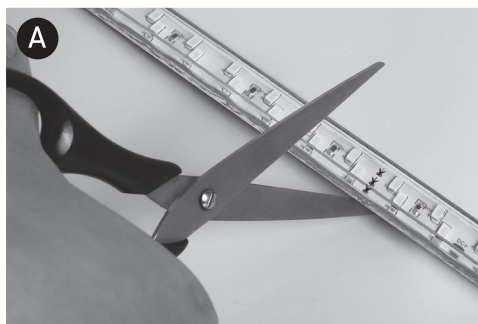

7862 Accessories

Warnings:

- The mounting surface must be clean, dry and free from dust or grease.
- Make sure that the product is installed properly before connecting to electricity.
- Do not bend, fold or twist the LED strip.
- Do not bend to install in corners.
- Do not put excessive pressure on surface of LED strip.
- Do not cover LED strip with any materials.
- Do not install in ambient temperatures below -10°C or exceeding 45°C.
- Always handle the LED strip with care.
- The LED strip should not be exposed to direct sunlight.
- LED strips with different batch numbers may have slight variations in colour consistency (CCT±150K).
- Maintenance and installation should only be carried out by a professional electrician.