

06 Downlights Fixed LED>The Dark Light Project Range

## 10110TD/W/C



10W LED recessed downlight, IP54. Suitable for Indoor/Outdoor installation.

Complete with 250mA driver.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

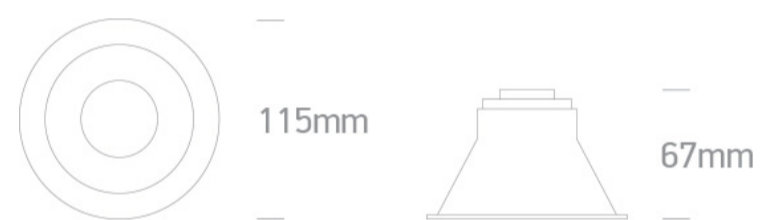

### Physical Specification

Item Group	06 Downlights Fixed LED
Family	The Dark Light Project Range
Order Code	10110TD/W/C
Colour	White
Material	Aluminium
Shape	Circular
Height	67mm
Diameter	115mm
Cutout Hole Diameter	95mm
Recessed Ceiling	Yes
Depth Required	110mm
Indoor	Yes

Outdoor

Yes

Adjustable

No

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

10W

IP Rating

IP54

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

250mA

Voltage

39V

Safety Class



Power(Watts)

9W

IP Rating

IP54

Light Source

LED built in

LED Type

SMD 2835

LED Brand

Epistar

F Mark




Gear

Gear Type

Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	7-9,2W
Power Factor	0,9
Constant Current	Yes
Output	250mA
Voltage Range	30-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	ONE

#### Illumination Data

Colour Temperature	4000K
Lumen Output	950lm
Light Efficiency	95lm/W
CRI	80
Beam Angle	60°
Illumination Diagram	
Dark Light	Yes

#### Packing Info

Box Length	14cm
Box Width	14cm
Box Height	8cm
Pcs/Carton	30
Barcode	5291889070221

HS Code

9405409900

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

