




Product Datasheet

02 Recessed Spots Fixed LED>The Dark Light Pro Range Aluminium

10115FD/B/W

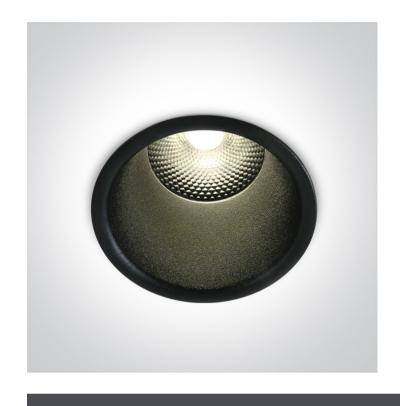

15W COB LED recessed spot, IP20, for general lighting applications.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads









Dimensions



92mm



120mm

Gallery



Physical Specification

Item Group	02 Recessed Spots Fixed LED
Family	The Dark Light Pro Range Aluminium
Order Code	10115FD/B/W
Colour	Black
Material	Aluminium
Shape	Circular
Height	120mm
Order Code Colour Material Shape	10115FD/B/W Black Aluminium Circular

Diameter	92mm
Cutout Hole Diameter	82mm
Recessed Ceiling	Yes
Depth Required	150mm
Indoor	Yes
Adjustable	No
Electrical Characteristics	
Gear	External-Included
Fitting , Driver	
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	350mA
Voltage	39,5V
Safety Class	
Power(Watts)	13,82W
IP Rating	IP20
Light Source	LED built in
LED Type	СОВ
LED Brand	Epistar

LED Number	1
F Mark	F
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	8,75-14W
Power Factor	0,9
Constant Current	Yes
350mA	25-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	LIFUD
umination Data	
Colour Temperature	3000K
Lumen Output	1275lm
Light Efficiency	85lm/W
CRI	90
Beam Angle	24°
Illumination Diagram	
Dark Light	Yes
acking Info	
Box Length	12,5cm
Box Width	10cm

Box Height	14cm
Box Weight	0.380kg
Pcs/Carton	20
Barcode	5291889057390
HS Code	9405413990

Certification & Warranty

Warranty 3 years



