


06 Downlights Fixed LED>The 40-48W Round Recessed Panels Die Cast

10148PE/W/W

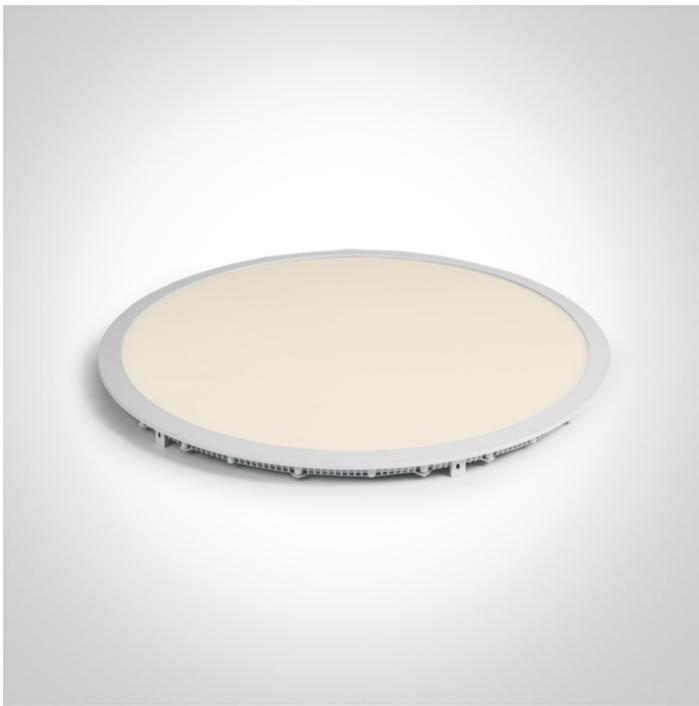

48W slim downlight LED, IP40, ideal for commercial applications such as offices, galleries and showrooms.

Requires 1200mA LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

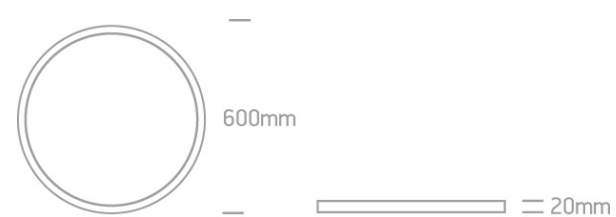

Must be ordered separately



89048

Related items



89048T



89050TLD

Physical Specification


Item Group

06 Downlights Fixed LED

Family	The 40-48W Round Recessed Panels Die Cast
Order Code	10148PE/W/W
Colour	White
Material	Die Cast
Diffuser Material	Acrylic
Shape	Circular
Height	20mm
Diameter	600mm
Cutout Hole Diameter	585mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	No

#### Electrical Characteristics

##### Fitting

Input Type	Constant Current
Input Current	1200mA
Safety Class	
Power(Watts)	48W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
LED Number	240

#### Illumination Data

Colour Temperature	3000K
Lumen Output	3500lm

Light Efficiency

72,91lm/W

CRI

80

Beam Angle

120°

Illumination Diagram



## Packing Info

Box Length

72cm

Box Width

65cm

Box Height

4,5cm

Box Weight

3.400kg

Pcs/Carton

4

Barcode

5291889041863

HS Code

9405119090

## Certification & Warranty

Warranty

2 years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

