

04 Recessed Spots Adjustable LED>The 3W Mini Lighter

11103K/B/W



3W LED Dark Light Recessed adjustable spot, IP20.

Requires 350mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

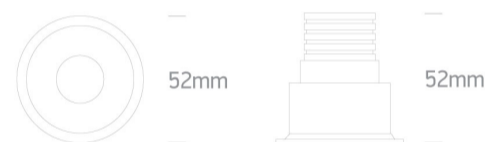

Must be ordered separately



89004



89004T



Physical Specification

Item Group	04 Recessed Spots Adjustable LED
Family	The 3W Mini Lighter
Order Code	11103K/B/W
Colour	Black
Material	Aluminium
Shape	Circular

Height	52mm
Diameter	52mm
Cutout Hole Diameter	42mm
Recessed Ceiling	Yes
Depth Required	60mm
Indoor	Yes
Adjustable	1 Direction

Electrical Characteristics

Fitting

Input Type	Constant Current
Input Current	350mA
Voltage	8,4V
Safety Class	
Power(Watts)	3W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux
LED Number	1
Cable Length	40cm
F Mark	

Illumination Data

Colour Temperature	3000K
Lumen Output	240lm
Light Efficiency	80lm/W
CRI	90
Beam Angle	30°

Illumination Diagram



Dark Light

Yes

Packing Info

Box Length

5,5cm

Box Width

5,5cm

Box Height

5,6cm

Pcs/Carton

100

Barcode

5291889070030

HS Code

9405409900

Certification & Warranty

Warranty

5 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

