

04 Recessed Spots Adjustable LED > The Interchangeable Rings Range

11104K/W/W

Aluminium



4W COB LED adjustable recessed spot with interchangeable rings.

Ring must be ordered separately.

Requires 350/500mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

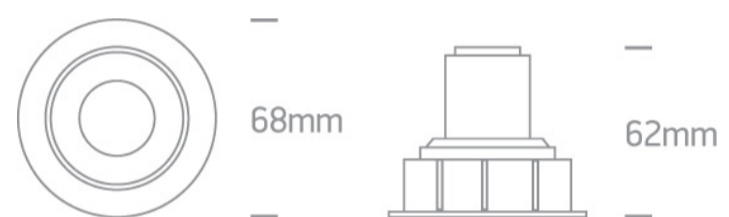

Must be ordered separately



050100/B



050100/BS



050100/C



050100/CU



050100/W



89004





89004T

Physical Specification


| | |
|----------------------|--|
| Item Group | 04 Recessed Spots Adjustable LED |
| Family | The Interchangable Rings Range Aluminium |
| Order Code | 11104K/W/W |
| Colour | White |
| Material | Aluminium |
| Shape | Circular |
| Height | 62mm |
| Diameter | 68mm |
| Cutout Hole Diameter | 60mm |
| Recessed Ceiling | Yes |
| Depth Required | 80mm |
| Indoor | Yes |
| Adjustable | 1 Direction |

Electrical Characteristics

Fitting

| | |
|---------------|---|
| Input Type | Constant Current |
| Input Current | 350mA/500mA |
| Safety Class |  |
| Power(Watts) | 3/5W |
| IP Rating | IP20 |
| Light Source | LED built in |
| LED Type | COB |
| LED Brand | Cree |
| LED Number | 1 |
| Cable Length | 40cm |
| F Mark |  |

Illumination Data

| | |
|----------------------|---|
| Colour Temperature | 3000K |
| Lumen Output | 400lm@5W |
| Light Efficiency | 80lm/W |
| CRI | 80 |
| Beam Angle | 35° |
| Illumination Diagram |  |
| Dark Light | Yes |

Packing Info

| | |
|------------|---------------|
| Box Length | 8,5cm |
| Box Width | 8cm |
| Box Height | 8cm |
| Box Weight | 0,165Kg |
| Pcs/Carton | 50 |
| Barcode | 5291889054092 |
| HS Code | 9405409900 |

Certification & Warranty

| | |
|----------------|---------|
| Warranty | 3 Years |
| Weee Directive | Yes |

switch to
one light!

one
LIGHT

