

04 Recessed Spots Adjustable LED>The COB Fire Rated Range

## 11106PF/C



6W LED Fire Rated Recessed adjustable spot, IP20.

Requires 350mA driver.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

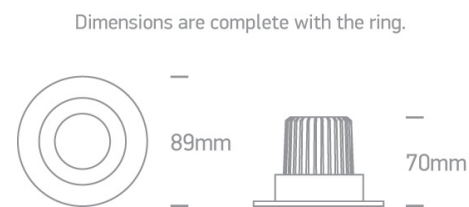


### Gallery



### Must be ordered separately




050044/B



050044/C



050044/MC

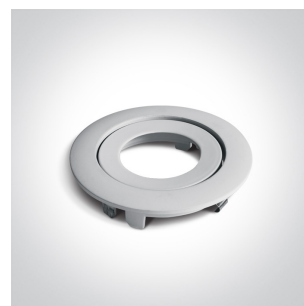

050044/W





89008

## Physical Specification

Item Group	04 Recessed Spots Adjustable LED
Family	The COB Fire Rated Range
Order Code	11106PF/C
Colour	White
Material	Die Cast
Shape	Circular
Height	70mm
Diameter	89mm
Cutout Hole Diameter	75mm
Recessed Ceiling	Yes
Depth Required	90mm
Indoor	Yes
Adjustable	1 Direction

## Electrical Characteristics

### Fitting

Input Type	Constant Current
Input Current	350mA
Safety Class	
Power(Watts)	6W
IP Rating	IP20
Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux
LED Number	1
Cable Length	40cm
F Mark	

## Illumination Data

Colour Temperature	4000K
Lumen Output	530lm
Light Efficiency	88,33lm/W
CRI	80
Beam Angle	40°
Illumination Diagram	

## Packing Info

Box Length	12cm
Box Width	11cm
Box Height	8,5cm
Box Weight	0,322Kg
Pcs/Carton	20
Barcode	5291889047155
HS Code	9405409900

## Certification & Warranty

Warranty	3 Years
Weee Directive	Yes

switch to  
**one light!**

one  
LIGHT

