

21 Industrial & Floodlights>The High Power IP65 LED Range Single

## 38118M/C



IP65 LED fitting to replace T8 IP65 traditional waterproof fluorescent. Stainless steel clips included. Polycarbonate body and diffuser.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.




### Downloads



### Dimensions



### Gallery

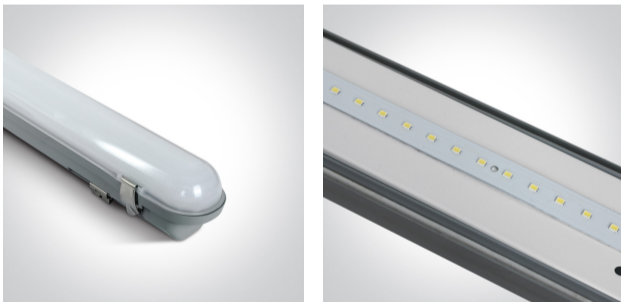



### Physical Specification

Item Group	21 Industrial & Floodlights
Family	The High Power IP65 LED Range Single
Order Code	38118M/C
Colour	Grey
Material	PC
Diffuser Material	PC
Shape	Rectangular

Length	615mm
Width	84mm
Height	80mm
Surface Ceiling	Yes
Surface Wall	Yes
Indoor	Yes
Outdoor	Yes
Adjustable	No
IK Rating	8

### Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	15W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	400mA
Voltage	36V
Power(Watts)	14,4W
IP Rating	IP65
Light Source	LED built in

LED Type	SMD 2835
LED Brand	Everlight
LED Number	54

## Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	9,45-14W
Power Factor	0,9
Constant Current	Yes
350mA	27-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Connector
Brand	Tridonic

## Illumination Data

Colour Temperature	4000K
Lumen Output	1500lm
Light Efficiency	100lm/W
CRI	80
Illumination Diagram	

## Packing Info

Box Length	62cm
Box Width	8,3cm

Box Height	9cm
Box Weight	1,2Kg
Pcs/Carton	6
Barcode	5291889054986
HS Code	9405104090

#### Certification & Warranty

Warranty	3 Years
Weee Directive	Yes

switch to  
**one light!**

one  
LIGHT

