

04 Recessed Spots Adjustable LED>The IP44 COB Shop & Hotel Range

51112E/W/W



12W LED Dark Light Recessed adjustable spot, IP44.

Requires 700mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

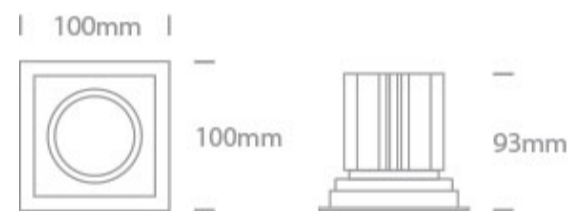

Gallery



Must be ordered separately



89015A

Related items




89015AT

Physical Specification


Item Group	04 Recessed Spots Adjustable LED
Family	The IP44 COB Shop & Hotel Range
Order Code	51112E/W/W
Colour	White
Material	Die Cast
Shape	Rectangular
Length	100mm
Width	100mm
Height	93mm
Cutout Hole Width	90mm
Cutout Hole Length	90mm
Recessed Ceiling	Yes
Depth Required	105mm
Indoor	Yes
Adjustable	2 Directions

Electrical Characteristics

Fitting	
Input Type	Constant Current
Input Current	700mA
Safety Class	III
Power(Watts)	12W
IP Rating	IP44

Light Source	LED built in
LED Type	COB
LED Brand	Bridgelux
LED Number	1
Cable Length	40cm
F Mark	

Illumination Data

Colour Temperature	3000K
Lumen Output	1100lm
Light Efficiency	91,67lm/W
CRI	90
Beam Angle	40°
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Length	10,5cm
Box Width	10,5cm
Box Height	10,5cm
Box Weight	0.374kg
Pcs/Carton	50
Barcode	5291889047339
HS Code	9405413990

Certification & Warranty

Warranty

5 years

Weee Directive

Yes

switch to
one light!

one
LIGHT

