


21 Industrial & Floodlights>The Glass Face AC LED Floodlights

## 7028BG/B/C

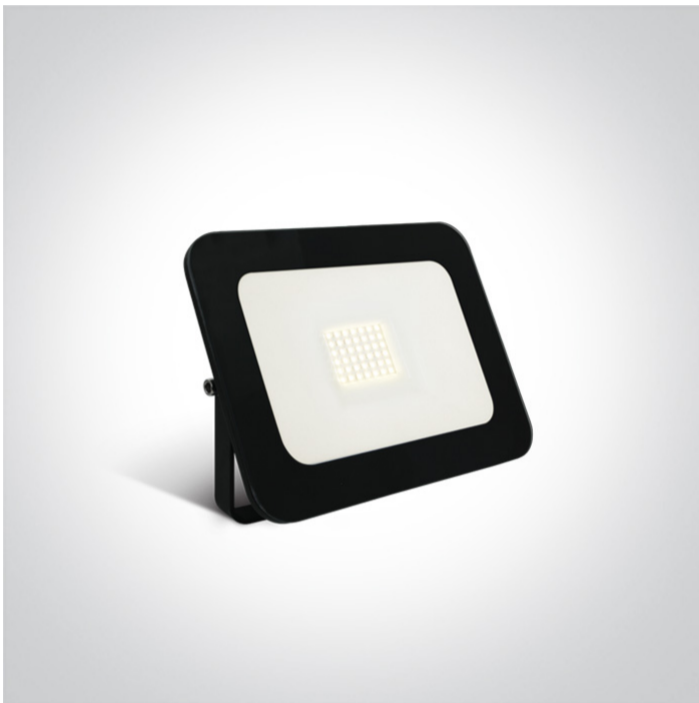

30W AC LED flood light with adjustable mounting bracket.

IP65 rated for outdoor use.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

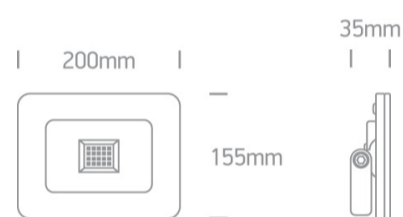



### Physical Specification


Item Group	21 Industrial & Floodlights
Family	The Glass Face AC LED Floodlights
Order Code	7028BG/B/C
Colour	Black
Material	Die Cast
Diffuser Material	Glass
Shape	Rectangular
Length	200mm
Width	155mm
Height	35mm
Surface Ceiling	Yes
Surface Wall	Yes

Surface Floor/Ground	Yes
Outdoor	Yes
Adjustable	1 Direction

#### Electrical Characteristics

Gear	No
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP65
Light Source	LED built in
Dimmable	No
Cable Length	50cm
F Mark	


#### Illumination Data

Colour Temperature	4000K
Lumen Output	2400lm
Light Efficiency	80lm/W
CRI	80
Beam Angle	100°
Illumination Diagram	

#### Packing Info

Pcs/Carton	12
Barcode	5291889046042

Energy Label

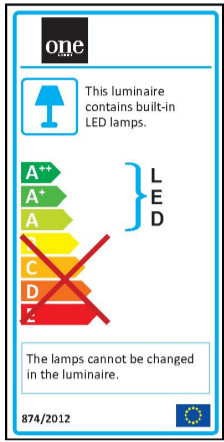

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

