

INSTALLATION MANUAL

6308D/./V & 6308L/./V



DC MOTOR

35W MOTOR

6 SPEED

WINTER REVERSE MOTOR

REMOTE CONTROL


LIGHT ON/OFF SWITCH

22W LED

2000 LUMEN

230V | LED 22W | DC MOTOR 35W | IP20 | Metal body | Wood blades | Rod mounted

- Maximum air flow rate 100m³/min
- Service value 2,8/W
- Standby power consumption 0,5W
- Fan sound power level 45dB(A)
- Maximum air velocity 2,6 m/sec.
- Max RPM 185



1

Install the fan blades and tighten screws.

2

Install LED plate and connect cable.

3

Install ceiling bracket.

4

Remove the R clip from the pin. Then remove the pin from the rod.

5

A Place the parts on the rod.
B Pass wires through rod.

6

A Put the rod into the motor and install the pin and R clip.
B Tighten all the nuts and screws.

7

A Hang the fan onto the ceiling bracket.
B Lock into place.


8

Place the receiver on the hanger bracket.

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Maintenance and installation should only be carried out by a professional electrician.

6308D/../../V & 6308L/../../V

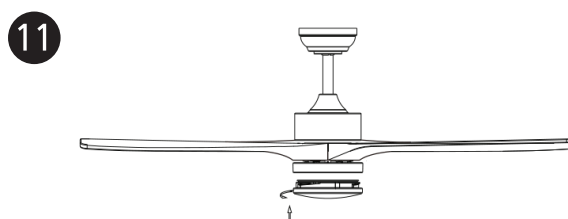


Install the diffuser onto the LED plate.

The diagram illustrates the 11 steps for assembling the electric shaver:

1. Attaching the mounting bracket to the back of the shaver head.
2. Inserting the shaver head into the mounting bracket.
3. Inserting the shaver head into the mounting bracket.
4. Attaching the shaver head to the mounting bracket.
5. Attaching the shaver head to the mounting bracket.
6. Attaching the shaver head to the mounting bracket.
7. Attaching the shaver head to the mounting bracket.
8. Attaching the shaver head to the mounting bracket.
9. Attaching the shaver head to the mounting bracket.
10. Attaching the shaver head to the mounting bracket.
11. Attaching the shaver head to the mounting bracket.

Requires 2xAAA batteries. Remove batteries if not used for long period of time.

- ❶ LED indicator
- ❷ ON/OFF
- ❸ Mute sound
- ❹ Warm white LED
- ❺ Cool white LED
- ❻ Daylight LED
- ❼ Fan OFF
- ❽ Fan speeds: To turn fan ON 1(lowest) to 6 (highest)
- ❾ LED light ON / OFF
- ❿ LED dimmer
- ⓫ Breeze: Fan speeds automatic cycle between 1 to 6
- ⓬ Vacation mode: Switch on the light kit
5 minutes each 2 hours
- ⓭ Reverse function for winter and summer
- ⓮ Timer: Fan stops after 2h/4h/8h

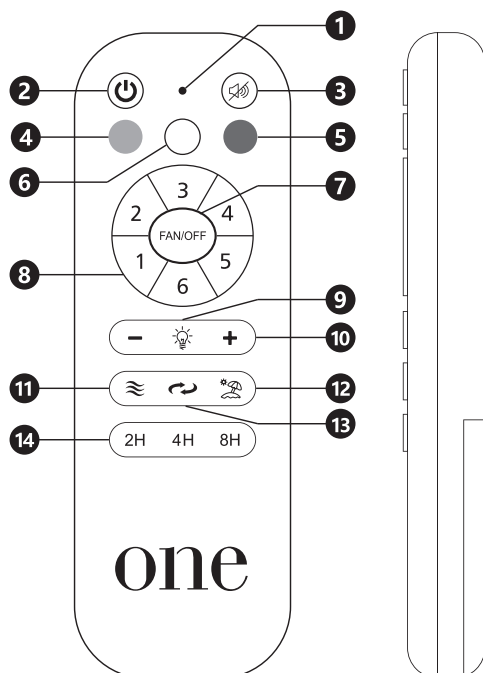

NOTE: To pair a remote to a receiver turn ON the power supply to the fan and press the ON/OFF and MUTE keys on the remote for 3 to 5 seconds. You will hear a beep.

- 1 Hanger bracket
- 2 Receiver
- 3 Rod assembly
- 4 Canopy
- 5 Canopy cover
- 6 Motor
- 7 22W LED
- 8 Remote control + holder
+2 mounting screws
+1.5V (AAA)x2 batteries
- 9 Cover
- 10 Diffuser
- 11 Fan blades (3pcs)
- A Screws for blades
- B Mounting hardware
- C Blade balancing kit

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Maintenance and installation should only be carried out by a professional electrician.