

INSTALLATION MANUAL

7835C

ecostrip




97 CRI



24V DC | SMD 2835 | 70LEDs/m | 14,4W/m | IP20

Requires 24V DC driver.
Supplied in 5m roll with
double face adhesive tape.

Cut every 10cm (7-LED segment)



one
LIGHT

A. CUT:

The LED strip can be cut every 10cm (7-LED segment) at the clearly marked positions. Cut carefully at the desired length by using a sharp pair of scissors.


B. CONNECT:

Connect the LED strip to the LED driver's output. Ensure that the polarity is correct (red "+", black "-").

To connect together two pieces of LED strips or a power supply cable to the LED strip, use a soldering iron to solder the two pieces together.

C. INSTALLATION:

Remove the 3M double face adhesive tape from the LED strip gradually during installation and fix into the required position.

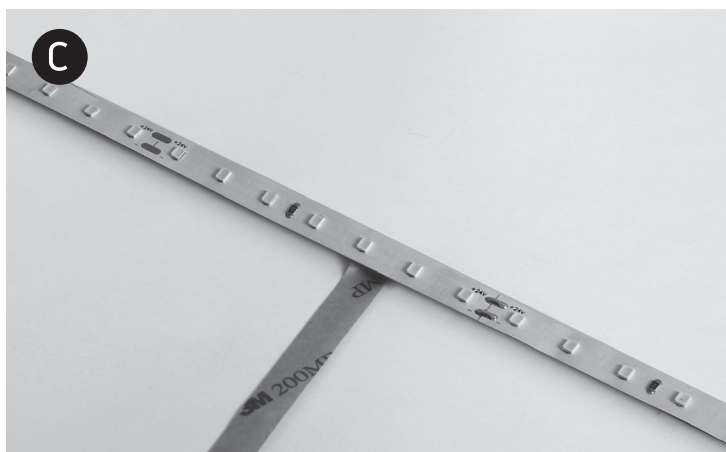

Warnings:

1. The mounting surface must be clean, dry and free from dust or grease.
2. Make sure that the product is installed properly before connecting to electricity.
3. Do not bend, fold or twist the LED strip.
4. Do not bend to install in corners.
5. Do not put excessive pressure on surface of LED strip.
6. Do not cover LED strip with any materials.
7. Do not install in ambient temperatures below -10°C or exceeding 45°C .
8. Always handle the LED strip with care.
9. The LED strip should not be exposed to direct sunlight.
10. LED strips with different batch numbers may have slight variations in colour consistency ($\text{CCT}\pm 150\text{K}$).
11. Maintenance and installation should only be carried out by a professional electrician.