


INSTALLATION MANUAL

7848/RGBW

LED Flex tile



240mm

one
LIGHT

24V DC | SMD 5050 | 162LEDs/pc | RGB 18W/m + WW 6W/m | IP20

Requires 24V DC driver / Connect up to 10pcs / Supplied with 3M double face adhesive.

80
CRI

A. CUT:





The LED Flex tile can be cut every 4cm by 6cm at the clearly marked positions. Cut carefully at the desired height and length by using a sharp pair of scissors.

B. CONNECT:

1. Connect the LED Flex tile to the LED driver's output. Ensure that the polarity is correct (red/green/blue/white "-", black "+"). Red/green/blue= RGB / White=Warm white
2. To connect together two pieces of LED Flex tiles add a tile connector.

C. INSTALLATION:

Remove the 3M double face adhesive tape from the LED Flex tile gradually during installation and fix into the required position.

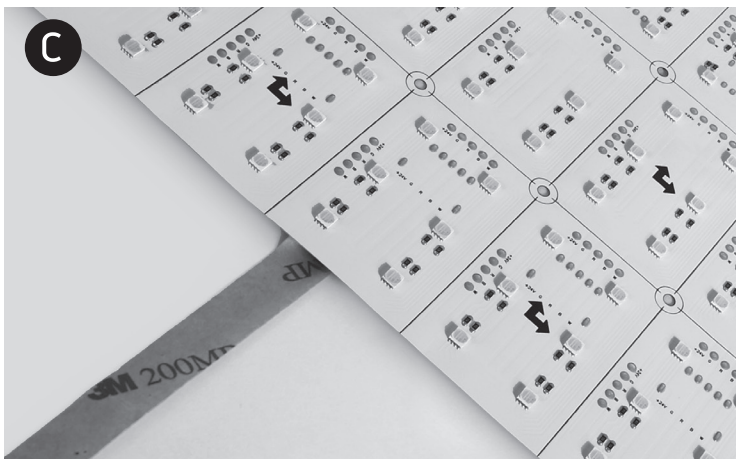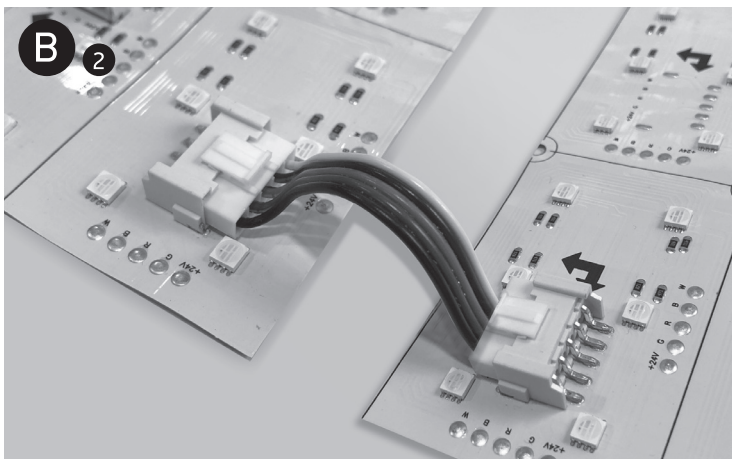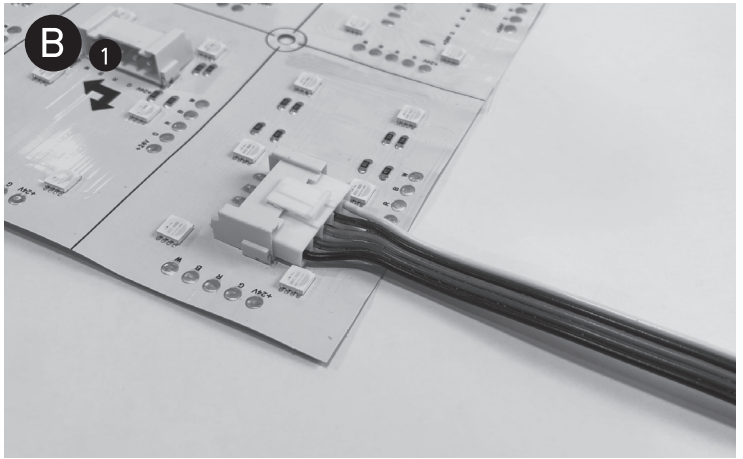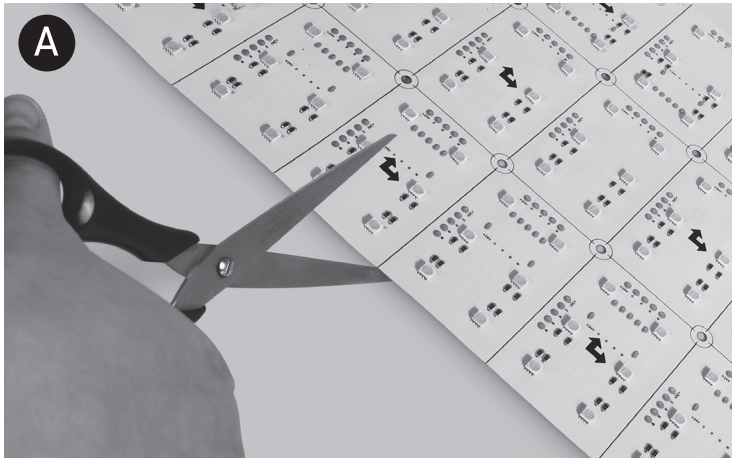

Warnings:

1. The mounting surface must be clean, dry and free from dust or grease.
2. Make sure that the product is installed properly before connecting to electricity.
3. Do not fold or twist the LED Flex tile.
4. Do not put excessive pressure on surface of LED Flex tile.
5. Do not cover LED Flex tile with any materials.
6. Do not install in ambient temperatures below -25°C or exceeding $+45^{\circ}\text{C}$.
7. Always handle the LED Flex tile with care.
8. The LED Flex tile should not be exposed to direct sunlight.
9. LED Flex tiles with different batch numbers may have slight variations in colour consistency ($\text{CCT} \pm 150\text{K}$).
10. Maintenance and installation should only be carried out by a professional electrician.