

INSTALLATION MANUAL

7872

LED
BUILT IN



90
CRI



UK
CA



230V | COB LED | 480LEDs/m | 12W/m | IP66

Supplied in 50m roll with double face adhesive tape. Avoid direct sunlight. Supplied with power supply EU plug and 1m cable.

Cut every 10cm
(48-LED segment)



one
LIGHT

A. CUT:

The LED strip can be cut every 10cm (48-LED segment) at the clearly marked positions. Cut carefully at the desired length by using a sharp pair of scissors.

B. SEAL:




To seal the non-powered end of the LED strip, use the end cap 7872E. Fill the end cap with silicon glue and carefully place the filled cap on the end of the LED strip.

C. CONNECT:

To connect together two pieces of LED strips, use the accessory 7872C.

D. INSTALL:

Remove the 3M double face adhesive tape from the LED strip gradually during installation and fix into the required position.

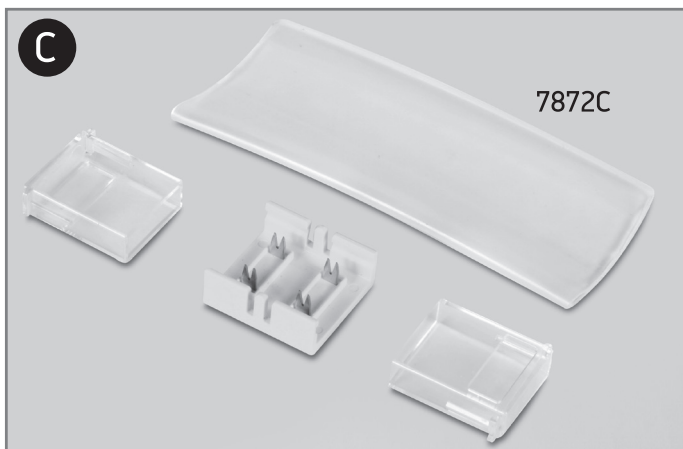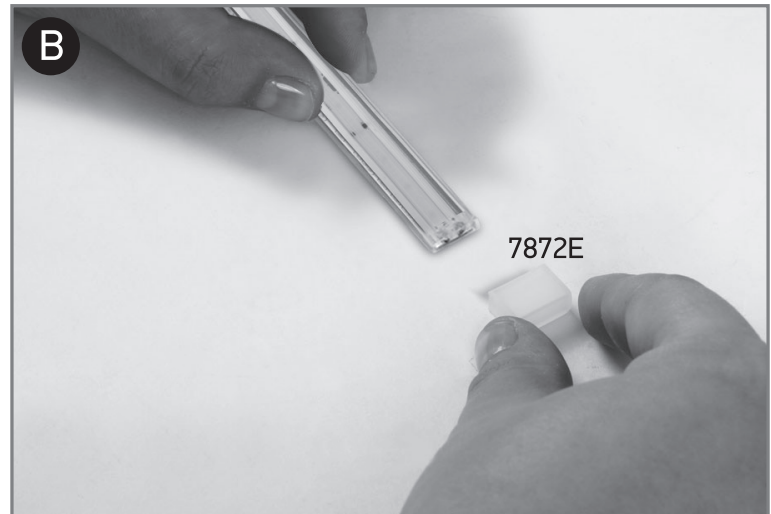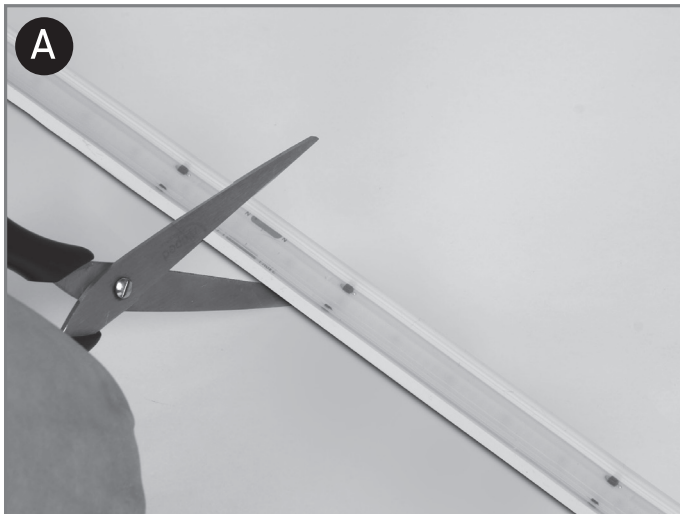

Warnings:

1. The mounting surface must be clean, dry and free from dust or grease.
2. Make sure that the product is installed properly before connecting to electricity.
3. Do not bend, fold or twist the LED strip.
4. Do not bend to install in corners.
5. Do not put excessive pressure on surface of LED strip.
6. Do not cover LED strip with any materials.
7. Do not install in ambient temperatures below -10°C or exceeding 45°C .
8. Always handle the LED strip with care.
9. The LED strip should not be exposed to direct sunlight.
10. LED strips with different batch numbers may have slight variations in colour consistency ($\text{CCT}\pm 150\text{K}$).
11. Maintenance and installation should only be carried out by a professional electrician.