


INSTALLATION MANUAL


89026AL




230V | 50/60Hz | IP20 | Adjustable Output
DALI, Push to DIM, Adjustable output using DIP switches.



DALI Dimming wiring diagram

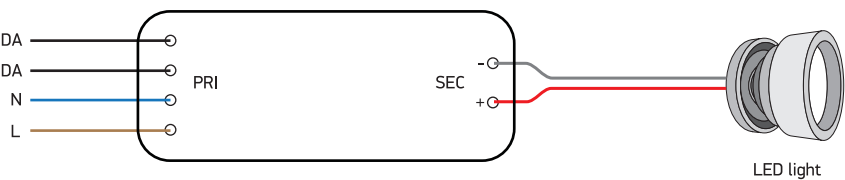

Push to DIM wiring diagram

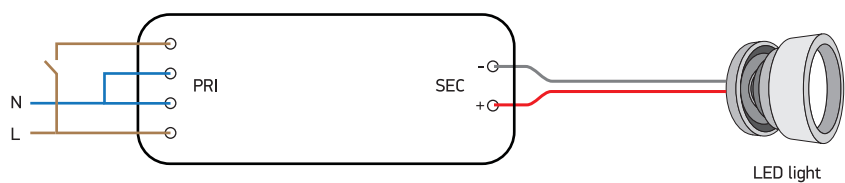

Specifications	
Input Voltage & Frequency	220-240V AC 50/60Hz
Power Factor	≥0,95
Operating Temperature	Ta: +45°C Tc: +80°C
Output Current	160mA 200mA 250mA 300mA 350mA 400mA 450mA 500mA 550mA 600mA 650mA 700mA
Output Voltage	30-50V 30-50V 20-50V 20-50V 20-50V 20-50V 20-50V 20-50V 20-47V 20-43V 20-40V 20-37V
Output Power	4,80W-8W 6W-10W 5W-12,50W 6W-15W 7W-17,50W 8W-20W 9W-22,50W 10W-25W 11W-25,85W 12W-25,80W 13W-26W 14W-26W

Current Selection

160mA	●	●	○	○
200mA	○	○	●	○
250mA	●	○	●	○
300mA	○	●	●	○
350mA	●	●	●	○
400mA	●	○	○	●
	1	2	3	4

450mA	○	●	○	●
500mA	●	●	○	●
550mA	○	○	●	●
600mA	●	○	●	●
650mA	○	●	●	●
700mA	●	●	●	●
	1	2	3	4

Primary cable: 2X0,75mm²
Secondary cable: 2X0,50mm²

The driver's output current can be selected by adjusting the DIP switches.

Warning: Before use, make sure the correct output current is set.

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.
4. Please select suitable wires to ensure maximum voltage between two products should be no higher than 2V during synchronous parallel operation.