

INSTALLATION MANUAL

9007L, 9009L, 9018L, 9022L

ecolamp



Key Features:


Environment friendly and mercury free | up to 90% energy saving.
Lifetime up to 30000 hours | Anti-UV and IR | Non-flickering.
Super Brightness LED used | Direct retrofit and replacement friendly.
Excellent thermal dissipation and optical solution.
CE and RoHS standard compliant.



SPECIFICATIONS

Item code	Power (W)	Luminous Flux (lm)	Colour Temperature (K)	Operating Voltage (V)	Frequency (Hz)	LED Type	Beam Angle	Length (mm)
9007L/D	7	700	6000	230V AC	50/60Hz	SMD 2835	320°	450
9009L/D	9	900	6500	230V AC	50/60Hz	SMD 2835	320°	600
9009L/C	9	900	4000	230V AC	50/60Hz	SMD 2835	320°	600
9009L/W	9	850	3000	230V AC	50/60Hz	SMD 2835	320°	600
9018L/D	18	1800	6500	230V AC	50/60Hz	SMD 2835	320°	1200
9018L/C	18	1800	4000	230V AC	50/60Hz	SMD 2835	320°	1200
9018L/W	18	1720	3000	230V AC	50/60Hz	SMD 2835	320°	1200
9022L/D	22	2200	6500	230V AC	50/60Hz	SMD 2835	320°	1500
9022L/C	22	2200	4000	230V AC	50/60Hz	SMD 2835	320°	1500
9022L/W	22	2100	3000	230V AC	50/60Hz	SMD 2835	320°	1500

CONNECTION DIAGRAM

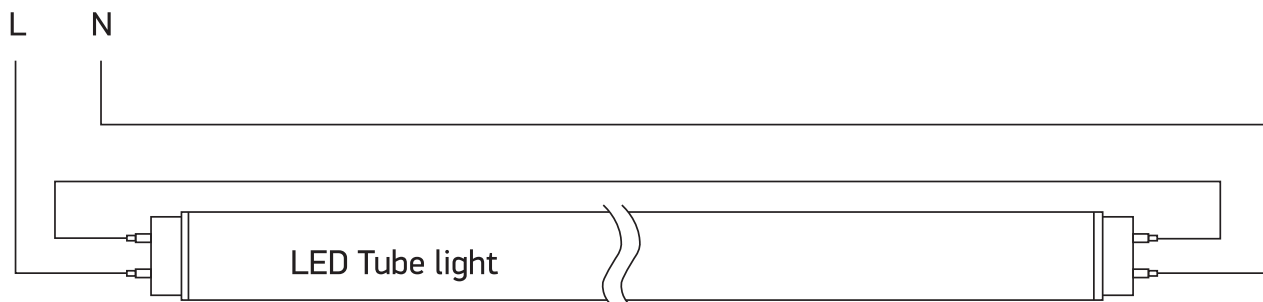

Warnings:

1. Make sure that the product is installed properly before connecting to electricity.
2. Do not cover the fitting.
3. Maintenance and installation should only be carried out by a professional electrician.