



Downlights Adjustable LED


Pages 207-216

07





The COB Trimless LED Aluminium

11130BT | 30W | COB LED | Trimless | Aluminium

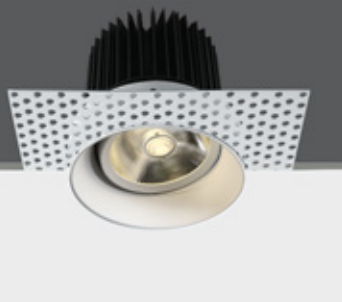

IP20
offer

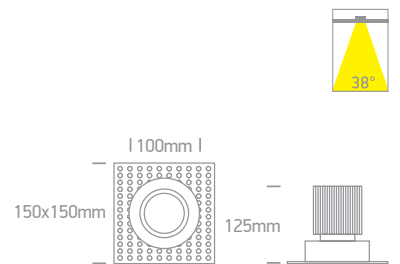


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
11130BT/W/C	White	Cool white	4000K	30W	2200lm	38°	700mA		40cm	110mm	160mm	12	Requires 700mA driver


Adjustable Multi LED Aluminium




11106LB | 6x1W | LED | Aluminium




IP20
offer

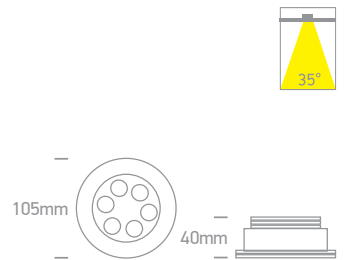


11109L | 9x1W | LED | Natural aluminium




IP20
offer

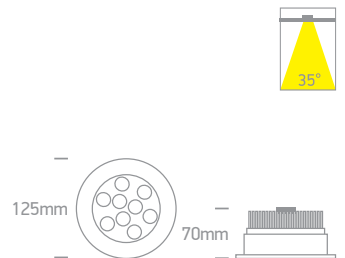

11112L | 12x1W | LED | Natural aluminium



IP20
offer

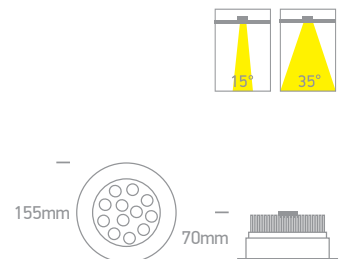


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S	Light	Height	Box	Notes
11106LB/W/35	Black	Warm white	3000K	6x1W	270lm	35°	350mA	III	40cm	90mm	50mm	50	Requires 350mA driver
11109L/W/35	Aluminium	Warm white	3000K	9x1W	405lm	35°	350mA	III	40cm	110mm	80mm	30	Requires 350mA driver
11112L/D/15	Aluminium	Daylight	6000K	12x1W	720lm	15°	350mA	III	40cm	140mm	80mm	30	Requires 350mA driver
11112L/D/35	Aluminium	Daylight	6000K	12x1W	720lm	35°	350mA	III	40cm	140mm	80mm	30	Requires 350mA driver
11112L/W/15	Aluminium	Warm white	3000K	12x1W	540lm	15°	350mA	III	40cm	140mm	80mm	30	Requires 350mA driver
11112L/W/35	Aluminium	Warm white	3000K	12x1W	540lm	35°	350mA	III	40cm	140mm	80mm	30	Requires 350mA driver



The COB Box Type Shop Range




51125 | 25W | COB LED | Die cast

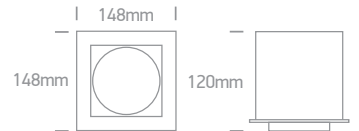

IP20
offer



51140 | 40W | COB LED | Aluminium



IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes	
51125/G/C	Grey	Cool white	4000K	25W	1750lm	38°	100-240V			130x130mm	160mm	12	Complete with 600mA driver
51140/B/W	Black	Warm white	3000K	40W	3400lm	70°	230V			220x130mm	140mm	9	Complete with 1050mA driver

one




51130/B/C




51130/W/W

The COB Box Type Shop Range

51120 | 20W | COB LED | Aluminium




IP20
offer

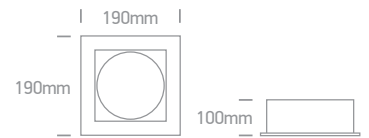

51130 | 30W | COB LED | Aluminium + metal




IP20

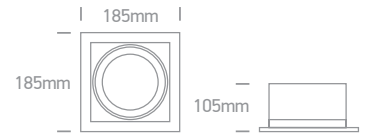

51230 | 2x30W | COB LED | Aluminium + metal



IP20

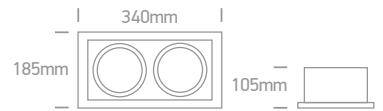


51130/W/W



51130/B/W



51230/W/W

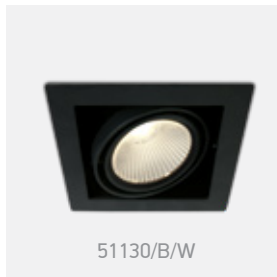

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes	
51120/G/W	Grey	Warm white	3000K	20W	1400lm	36°	230V			165x165mm	140mm	12	Complete with 500mA driver
51130/W/C	White	Cool white	4000K	30W	2700lm	38°	230V			160x160mm	125mm	12	Complete with 750mA driver
51130/W/W	White	Warm white	3000K	30W	2700lm	38°	230V			160x160mm	125mm	12	Complete with 750mA driver
51130/B/C	Black	Cool white	4000K	30W	2700lm	38°	230V			160x160mm	125mm	12	Complete with 750mA driver
51130/B/W	Black	Warm white	3000K	30W	2700lm	38°	230V			160x160mm	125mm	12	Complete with 750mA driver
51230/W/C	White	Cool white	4000K	2x30W	2x2700lm	38°	230V			320x160mm	125mm	6	Complete with 2x750mA drivers
51230/W/W	White	Warm white	3000K	2x30W	2x2700lm	38°	230V			320x160mm	125mm	6	Complete with 2x750mA drivers
51230/B/C	Black	Cool white	4000K	2x30W	2x2700lm	38°	230V			320x160mm	125mm	6	Complete with 2x750mA drivers
51230/B/W	Black	Warm white	3000K	2x30W	2x2700lm	38°	230V			320x160mm	125mm	6	Complete with 2x750mA drivers

Dark Mirror Reflector Range




11110E | 10W | COB LED | Die cast




11110E/W/W

DARK LIGHT
IP20

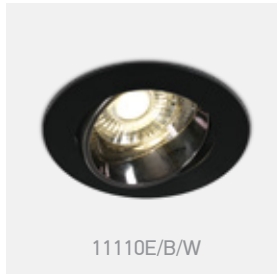

11110E/B/W

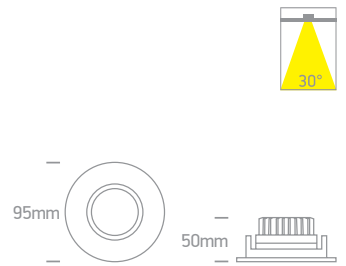


11120E | 20W | COB LED | Die cast




11120E/W/W

DARK LIGHT
IP20

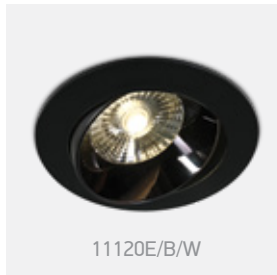

11120E/B/W

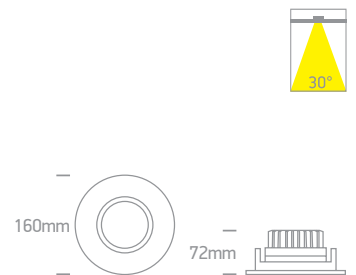


11130E | 30W | COB LED | Die cast




11130E/W/W

DARK LIGHT
IP20

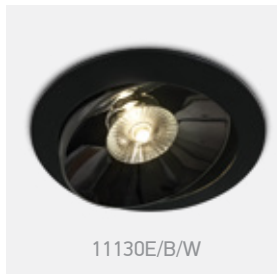

11130E/B/W

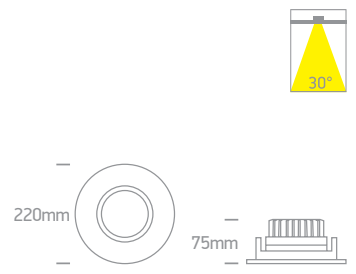

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11110E/W/W	White	Warm white	3000K	10W	850lm	30°	230V		85mm	80mm	40	Complete with 250mA driver
11110E/B/W	Black	Warm white	3000K	10W	850lm	30°	230V		85mm	80mm	40	Complete with 250mA driver
11120E/W/W	White	Warm white	3000K	20W	1700lm	30°	230V		140mm	110mm	20	Complete with 500mA driver
11120E/B/W	Black	Warm white	3000K	20W	1700lm	30°	230V		140mm	110mm	20	Complete with 500mA driver
11130E/W/W	White	Warm white	3000K	30W	2550lm	30°	230V		200mm	95mm	10	Complete with 750mA driver
11130E/B/W	Black	Warm white	3000K	30W	2550lm	30°	230V		200mm	95mm	10	Complete with 750mA driver




The COB Pop Up Die cast



11126F | 26W | COB LED | Die cast

LED BUILT IN
92 CRI

CE 3 YEAR

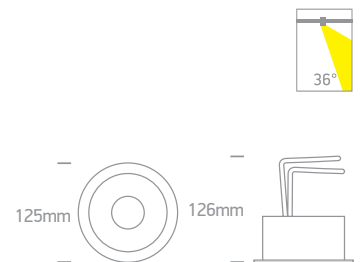

IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11126F/W/W	White	Warm white	3000K	26W	2210lm	36°	700mA		116mm	150mm	18	Requires 700mA driver

The COB Square Downlights

Die cast




51120B/W/C

51120B | 20W | COB LED | Die cast



IP20

51240B | 2x40W | COB LED | Die cast

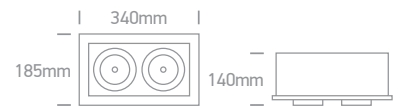

IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
51120B/W/C	White	Cool white	4000K	20W	1600lm	36°	230V		125x125mm	160mm	12	Complete with 500mA driver
51240B/W/W	White	Warm white	3000K	2x40W	2x3200lm	36°	230V		320x165mm	170mm	4	Complete with 2x1000mA drivers


The COB Downlights



11150B | 50W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE

3 YEAR

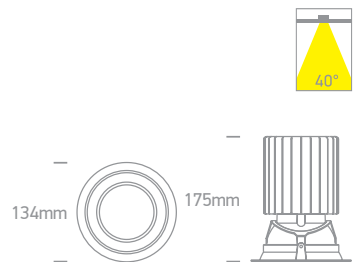


IP20



51140TR | 40W | COB LED | Die cast

LED BUILT IN
80 CRI
ADJUSTABLE

3 YEAR

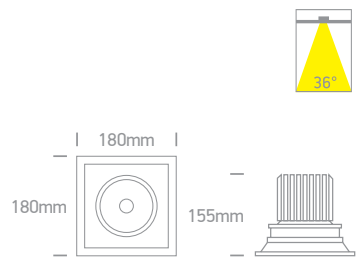

IP20


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11150B/W/W	White	Warm white	3000K	50W	3750lm	40°	230V		120mm	250mm	12	Complete with 1200mA driver
51140TR/W/W	White	Warm white	3000K	40W	3200lm	36°	230V		160x160mm	180mm	8	Complete with 1000mA driver

The Pop Up Range White



11115G | 15W | COB LED | Adjustable beam 15° - 45° | Aluminium

Complete with honeycomb.

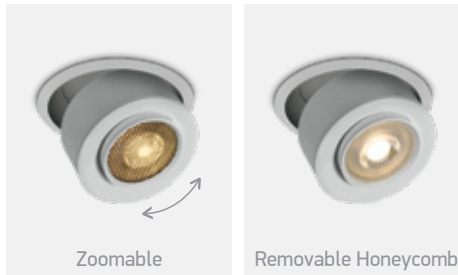


IP20



11128G | 25W | COB LED | Adjustable beam 15° - 45° | Aluminium

Complete with honeycomb.



IP20

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11115G/W/W	White	Warm white	3000K	15W	1500lm	15° - 45°	230V		98mm	70mm	27	Complete with 350mA driver
11128G/W/W	White	Warm white	3000K	25W	2500lm	15° - 45°	230V		120mm	70mm	18	Complete with 600mA driver



11115G/B/W

11128G/B/W



The Pop Up Range Black



IP20

11115G | 15W | COB LED | Adjustable beam 15°- 45° | Aluminium



Complete with honeycomb.

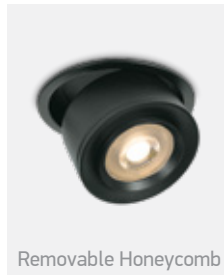

IP20

11128G | 25W | COB LED | Adjustable beam 15°- 45° | Aluminium

Complete with honeycomb.

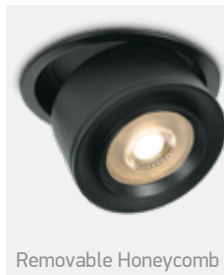

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
11115G/B/W	Black	Warm white	3000K	15W	1500lm	15°- 45°	230V		98mm	70mm	27	Complete with 350mA driver
11128G/B/W	Black	Warm white	3000K	25W	2500lm	15°- 45°	230V		120mm	70mm	18	Complete with 600mA driver