



Office & Kitchen

Pages 345-360

11





The Magnifying Lens LED Lamp



61066 | 8W | SMD 2835 | Plastic

Magnifying lens.

LED BUILT IN 80 CRI
 ADJUSTABLE CE 2 YEAR

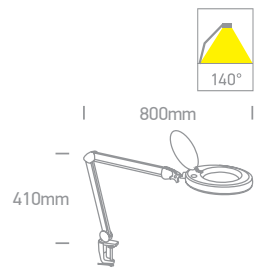


IP20



61066T | White floor stand for 61066

CE 2 YEAR
 1



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
61066/W	White	Daylight	6000K	8W	760lm	230V		4	Complete with driver

Reading LED Lamps




61108 | 5,5W | SMD LED | Dimmable | Aluminium




61108/W/V

new
IP20

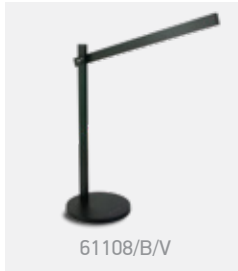

61108/B/V

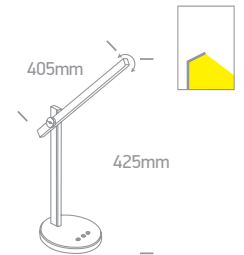


61110 | 5W | SMD LED | Dimmable | ABS




61110/W/W

new
IP20

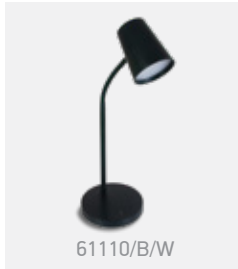

61110/B/W

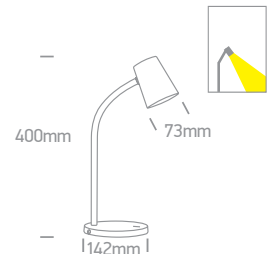


61110A | 10W | MR16 | GU10 | ABS




61110A/W

new
IP20

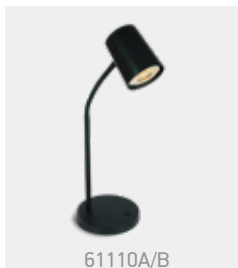

61110A/B

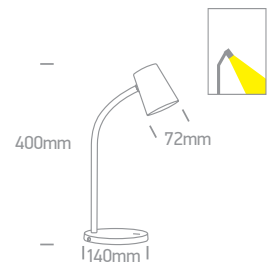

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
61108/W/V	White	CCT V	3000K-4000K- 6500K	5,5W	300lm	230V / 12V	□	8	With EU plug
61108/B/V	Black	CCT V	3000K-4000K-6500K	5,5W	300lm	230V / 12V	□	8	With EU plug
61110/W/W	White	Warm white	3000K	5W	200lm	230V / 12V	□	12	With EU plug
61110/B/W	Black	Warm white	3000K	5W	200lm	230V / 12V	□	12	With EU plug
61110A/W	White	-	-	10W	-	100-240V	□	12	With EU plug
61110A/B	Black	-	-	10W	-	100-240V	□	12	With EU plug





The LED Linear Range



38248M | 48W | SMD 2835 | Aluminium + Plastic



IP20



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Notes
38248M/W/W	White	Warm white	3000K	48W	4200lm	230V	□	Complete with driver




38250M/W/V

38225M/W/V


The LED Linear Range

CCT V

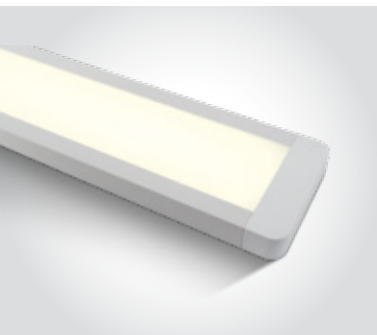




38225M | 25W | SMD 2835 | Aluminium + Plastic

new
IP20

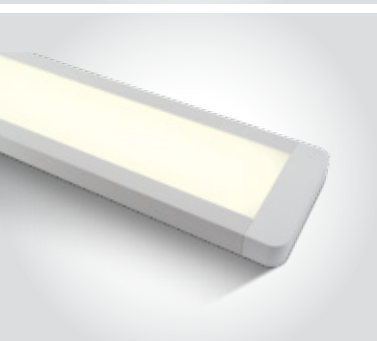




38248M | 48W | SMD 2835 | Aluminium + Plastic

new
IP20

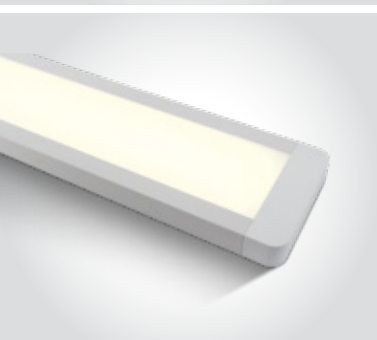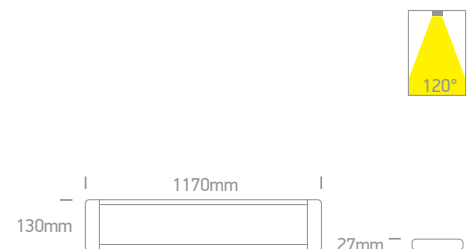

38250M | 50W | SMD 2835 | Aluminium + Plastic

new
IP20

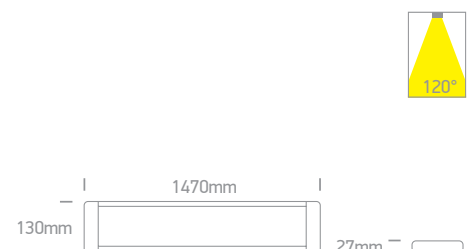

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	📦	Notes
38225M/W/V	White	CCT V	3000K-4000K-6500K	25W	2250lm	120°	230V	⚡	8	Complete with driver
38248M/W/V	White	CCT V	3000K-4000K-6500K	48W	4320lm	120°	230V	⚡	6	Complete with driver
38250M/W/V	White	CCT V	3000K-4000K-6500K	50W	4500lm	120°	230V	⚡	6	Complete with driver

LED Linear Floating Light



38148N | 48W | SMD 2835 | Aluminium + PC




40mm



IP20


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38148N/C	White	Cool white	4000K	48W	4800lm	230V		4	Complete with driver
38148N/W	White	Warm white	3000K	48W	4800lm	230V		4	Complete with driver

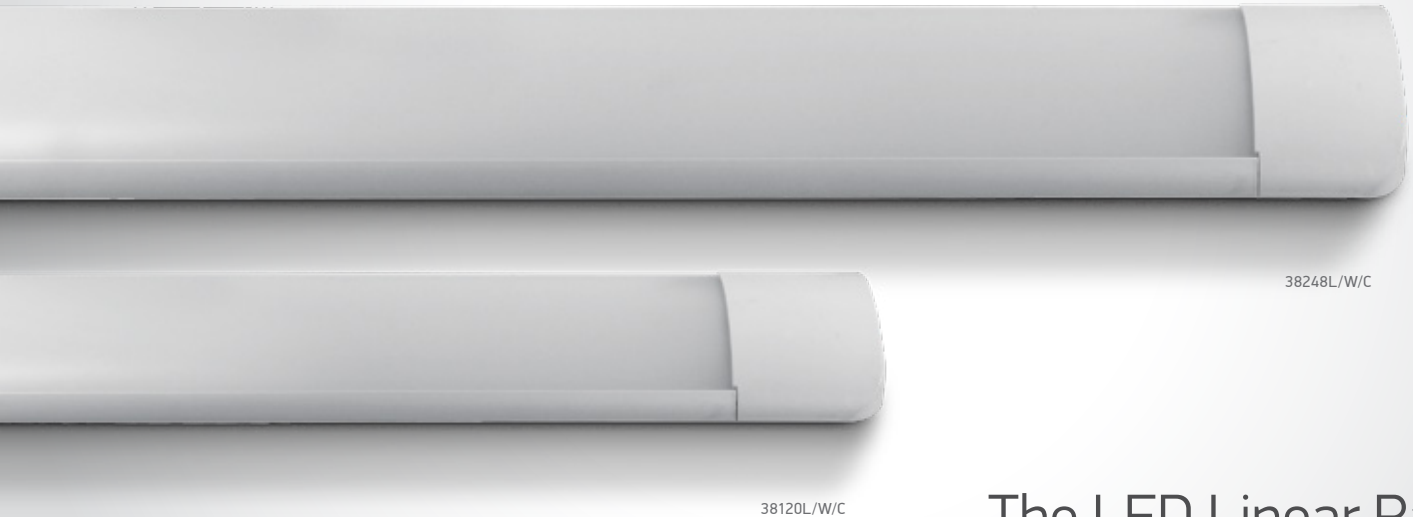

38248L/W/C

38120L/W/C



The LED Linear Range

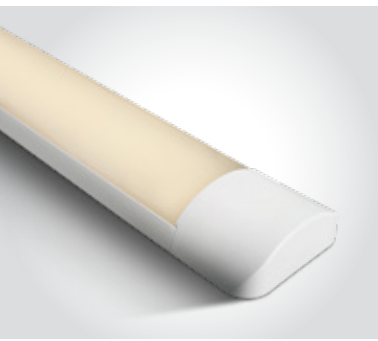

38120L | 20W | SMD 2835 | Aluminium + PC





IP20

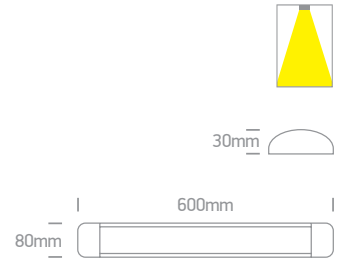

38135L | 35W | SMD 2835 | Aluminium + PC




IP20

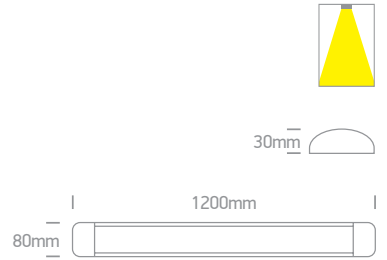

38248L | 48W | SMD 2835 | Aluminium + PC



IP20

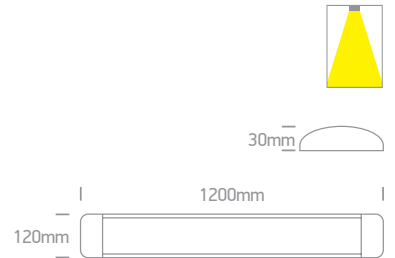

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Notes
38120L/W/C	White	Cool white	4000K	20W	1800lm	230V	⊕	Complete with driver
38120L/W/W	White	Warm white	3000K	20W	1700lm	230V	⊕	Complete with driver
38135L/W/C	White	Cool white	4000K	35W	3100lm	230V	⊕	Complete with driver
38135L/W/W	White	Warm white	3000K	35W	3000lm	230V	⊕	Complete with driver
38248L/W/C	White	Cool white	4000K	48W	4300lm	230V	⊕	Complete with driver
38248L/W/W	White	Warm white	3000K	48W	4200lm	230V	⊕	Complete with driver

LED Linear Profiles

Medium size



38150C/B/W

38150B/B/C



38150B/W/C

38150B | 40W | 48LEDs | Linear system | Aluminium

Can be connected in line.

LED BUILT IN

90 CRI

CE

3 YEAR


UGR17

DARK LIGHT

IP20



38150B/B/W



Complete with 4pcs fixing clips & 4pcs connectors.

dalí
DRIVER
Page 763



38150C/W/C

38150C | 40W | 24LEDs + Diffuser | Linear system | Aluminium

Can be connected in line.

LED BUILT IN

90 CRI

CE

3 YEAR


UGR19

DARK LIGHT

IP20



38150C/B/W



Complete with 4pcs fixing clips & 4pcs connectors.

dalí
DRIVER
Page 763



38150BU/W/C

38150BU | 40W + 20W Uplight | 48LEDs + Diffuser | Linear system | Aluminium

Can be connected in line.

LED BUILT IN

90 CRI

CE

3 YEAR


UGR17

DARK LIGHT

IP20



38150BU/B/C



Complete with 4pcs fixing clips & 4pcs connectors.

dalí
DRIVER
Page 763



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
38150B/W/C	White	Cool white	4000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150B/W/W	White	Warm white	3000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150B/B/C	Black	Cool white	4000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150B/B/W	Black	Warm white	3000K	40W	3800lm	34°	230V		300cm	12	Complete with 1000mA driver
38150C/W/C	White	Cool white	4000K	40W	3400lm	-	230V		300cm	12	Complete with 1000mA driver
38150C/W/W	White	Warm white	3000K	40W	3400lm	-	230V		300cm	12	Complete with 1000mA driver
38150C/B/W	Black	Warm white	3000K	40W	3400lm	-	230V		300cm	12	Complete with 1000mA driver
38150BU/W/C	White	Cool white	4000K	40W-20W	3800lm-1800lm	34°-120°	230V		300cm	12	Complete with 1000mA + 500mA drivers
38150BU/W/W	White	Warm white	3000K	40W-20W	3800lm-1800lm	34°-120°	230V		300cm	12	Complete with 1000mA + 500mA drivers
38150BU/B/C	Black	Cool white	4000K	40W-20W	3800lm-1800lm	34°-120°	230V		300cm	12	Complete with 1000mA + 500mA drivers
38150BU/B/W	Black	Warm white	3000K	40W-20W	3800lm-1800lm	34°-120°	230V		300cm	12	Complete with 1000mA + 500mA drivers



LED Linear Accessories Medium size



38150E/W

38150E | 1m Profile for 38150A, 38150B, 38150BU, 38150C & 38151A

Can be connected in line.



IP20



38150E/B



Complete with
4pcs fixing clips
& 4pcs connectors.



050170C/W


050170C | Corner for 38150A, 38150B, 38150BU, 38150C & 38151A



IP20



050170C/B

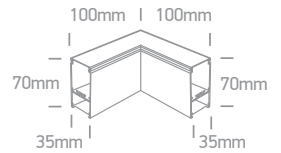

050170 | 3m Suspension kit for 38150A, 38150B, 38150BU, 38150C, 38151A, 38160A & 38161A





LED Linear Profiles Medium size



38150A | 40W | SMD 2835 | Linear system | Diffuser | Aluminium

Can be connected in line.



LED BUILT IN
90 CRI

3 YEAR
UGR19

IP20



Complete with 4pcs fixing clips & 4pcs connectors.

BAL
DRIVER
Page 763



38151A | 50W | SMD 2835 | Linear system | Diffuser | Aluminium

Can be connected in line.



LED BUILT IN
90 CRI

3 YEAR
UGR19

IP20










38151A/B/C



Complete with 4pcs fixing clips & 4pcs connectors.


BAL
DRIVER
Page 763



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38150A/W/C	White	Cool white	4000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38150A/W/W	White	Warm white	3000K	40W	3400lm	230V		300cm	12	Complete with 1000mA driver
38151A/W/W	White	Warm white	3000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver
38151A/B/C	Black	Cool white	4000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver
38151A/B/W	Black	Warm white	3000K	50W	4250lm	230V		300cm	9	Complete with 1250mA driver

LED Linear Accessories

Medium size

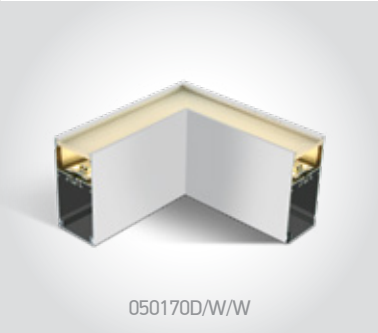

050170D/W/W

IP20

050170D | 8W | SMD 2835 | Corner for 38150A & 38151A | Diffuser | Aluminium

90

 CRI


 UGR19

3

 YEAR



050170D/B/W

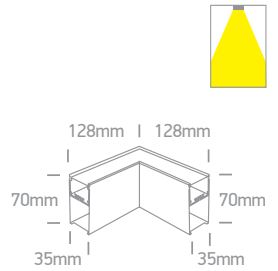

38150E/W

IP20

38150E | 1m Profile for 38150A, 38150B, 38150BU, 38150C & 38151A

Can be connected in line.

5


 YEAR

 12

 CE



38150E/B



Complete with
4pcs fixing clips
& 4pcs connectors.



050170C/W

IP20

050170C | Corner for 38150A, 38150B, 38150BU, 38150C & 38151A

5


 YEAR

 2

 CE



050170C/B

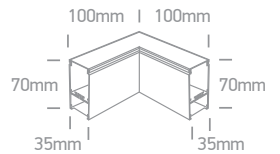

050170 | 3m Suspension kit for 38150A, 38150B, 38150BU, 38150C, 38151A, 38160A & 38161A

1

 CE

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
050170D/W/C	White	Cool white	4000K	8W	680lm	230V		150cm	10	Complete with 250mA driver
050170D/W/W	White	Warm white	3000K	8W	680lm	230V		150cm	10	Complete with 250mA driver
050170D/B/C	Black	Cool white	4000K	8W	680lm	230V		150cm	10	Complete with 250mA driver
050170D/B/W	Black	Warm white	3000K	8W	680lm	230V		150cm	10	Complete with 250mA driver



LED Linear Profiles

Large size




38160A/W/W

IP20


38160A | 40W | SMD 2835 | Linear system | Diffuser | Aluminium

Can be connected in line.

LED BUILT IN
90 CRI
CE
3 YEAR
UGR19



38160A/B/W



Complete with 4pcs fixing clips & 4pcs connectors.

bali DRIVER Page 763




38161A/W/C

IP20


38161A | 50W | SMD 2835 | Linear system | Diffuser | Aluminium

Can be connected in line.

LED BUILT IN
90 CRI
CE
3 YEAR
UGR19



38161A/B/C



Complete with 5pcs fixing clips & 4pcs connectors.

bali DRIVER Page 763




050170 | 3m Suspension kit for 38150A, 38150B, 38150BU, 38150C, 38151A, 38160A & 38161A

LED BUILT IN
CE

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	⊕	⊞	Notes
38160A/W/C	White	Cool white	4000K	40W	3400lm	230V	⊕	300cm	12	Complete with 1000mA driver
38160A/W/W	White	Warm white	3000K	40W	3400lm	230V	⊕	300cm	12	Complete with 1000mA driver
38160A/B/C	Black	Cool white	4000K	40W	3400lm	230V	⊕	300cm	12	Complete with 1000mA driver
38160A/B/W	Black	Warm white	3000K	40W	3400lm	230V	⊕	300cm	12	Complete with 1000mA driver
38161A/W/C	White	Cool white	4000K	50W	4250lm	230V	⊕	300cm	9	Complete with 1250mA driver
38161A/W/W	White	Warm white	3000K	50W	4250lm	230V	⊕	300cm	9	Complete with 1250mA driver
38161A/B/C	Black	Cool white	4000K	50W	4250lm	230V	⊕	300cm	9	Complete with 1250mA driver
38161A/B/W	Black	Warm white	3000K	50W	4250lm	230V	⊕	300cm	9	Complete with 1250mA driver





Up & Down LED Linear Profiles

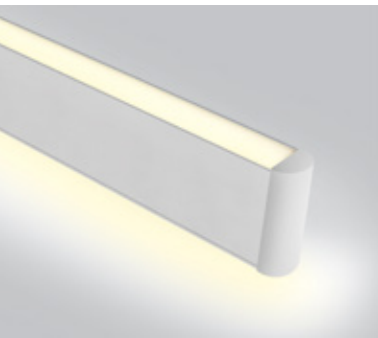


IP20

38140AU | 40W Downlight + Uplight | SMD 2835 | Linear suspended | Aluminium

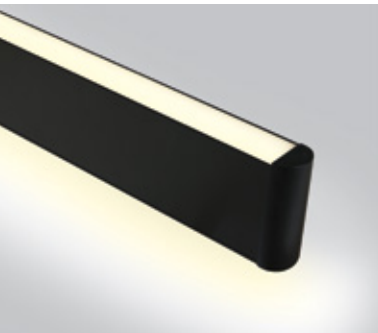


IP20

38140AU | 40W Downlight + Uplight | SMD 2835 | Linear suspended | Aluminium

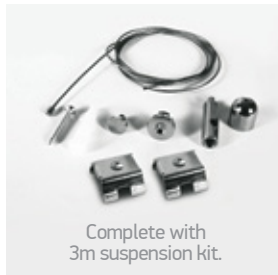

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
38140AU/W/C	White	Cool white	4000K	40W	3600lm	230V	⊕	12	Complete with 900mA driver
38140AU/W/W	White	Warm white	3000K	40W	3600lm	230V	⊕	12	Complete with 900mA driver
38140AU/B/C	Black	Cool white	4000K	40W	3600lm	230V	⊕	12	Complete with 900mA driver
38140AU/B/W	Black	Warm white	3000K	40W	3600lm	230V	⊕	12	Complete with 900mA driver

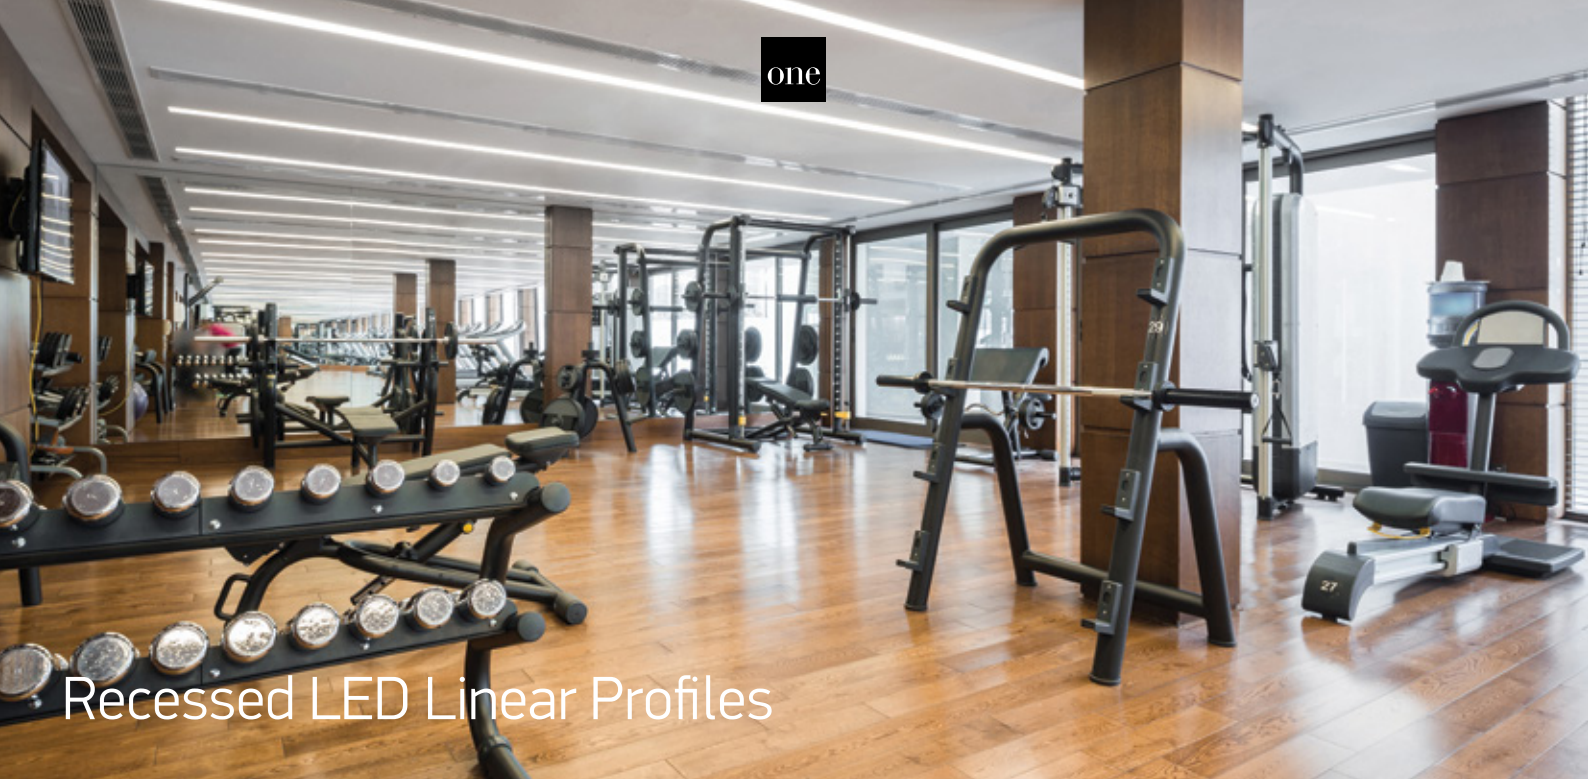

Recessed LED Linear Profiles




38152R/W/C

IP20

38152R | 40W | SMD 2835 | Recessed linear system | Aluminium

Can be connected in line.

LED BUILT IN
90 CRI
CE
3 YEAR



38152R/B/W



Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.

BALTR DRIVER Page 763




38152RC/W/C

IP20

38152RC | 8W | SMD 2835 | Corner for 38152R | Aluminium


LED BUILT IN
90 CRI
CE
3 YEAR



38152RC/W/W



Complete with 4pcs fixing clips & 4pcs connectors.

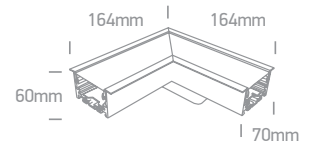

38152RL/W/C

IP20

38152RL | 10W | SMD 2835 | Ceiling to wall corner for 38152R | Aluminium


LED BUILT IN
90 CRI
CE
3 YEAR



38152RL/W/W



Complete with 4pcs fixing clips & 4pcs connectors.

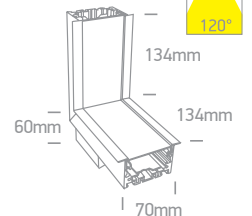

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Icon	Icon	Icon	Notes
38152R/W/C	White	Cool white	4000K	40W	3600lm	120°	230V	⊕	Lighting	Height	Box	Complete with 1000mA driver
38152R/W/W	White	Warm white	3000K	40W	3600lm	120°	230V	⊕	Lighting	Height	Box	Complete with 1000mA driver
38152R/B/W	Black	Warm white	3000K	40W	3600lm	120°	230V	⊕	Lighting	Height	Box	Complete with 1000mA driver
38152RC/W/C	White	Cool white	4000K	8W	720lm	120°	230V	⊕	Lighting	Height	Box	Complete with 200mA driver
38152RC/W/W	White	Warm white	3000K	8W	720lm	120°	230V	⊕	Lighting	Height	Box	Complete with 200mA driver
38152RL/W/C	White	Cool white	4000K	10W	900lm	120°	230V	⊕	Lighting	Height	Box	Complete with 200mA driver
38152RL/W/W	White	Warm white	3000K	10W	900lm	120°	230V	⊕	Lighting	Height	Box	Complete with 200mA driver



UGR19 Recessed LED Linear Profiles



38145AR | 40W | SMD 2835 | Recessed linear system | Aluminium

Can be connected in line.



LED BUILT IN
90 CRI


3 YEAR
UGR19

IP20



Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.

BALTI DRIVER
Page 763

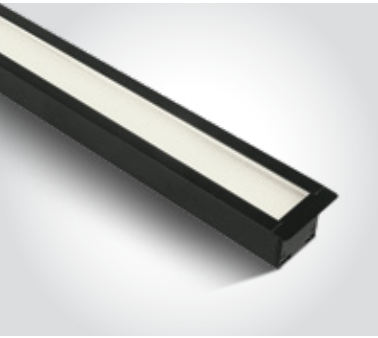

38145AR | 40W | SMD 2835 | Recessed linear system | Aluminium

Can be connected in line.



LED BUILT IN
90 CRI


3 YEAR
UGR19

IP20



Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.

BALTI DRIVER
Page 763

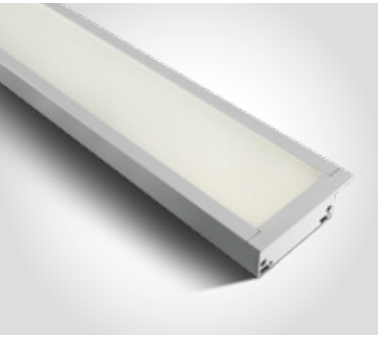

38150AR | 40W | SMD 2835 | Recessed linear system | Aluminium

Can be connected in line.



LED BUILT IN
90 CRI


3 YEAR
UGR19







IP20

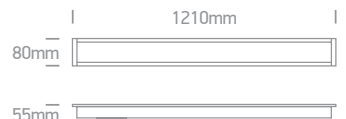

Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.

BALTI DRIVER
Page 763



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
38145AR/W/C	White	Cool white	4000K	40W	3800lm	230V		1200x37mm	80mm	12	Complete with 1000mA driver
38145AR/W/W	White	Warm white	3000K	40W	3800lm	230V		1200x37mm	80mm	12	Complete with 1000mA driver
38145AR/B/C	Black	Cool white	4000K	40W	3800lm	230V		1200x37mm	80mm	12	Complete with 1000mA driver
38145AR/B/W	Black	Warm white	3000K	40W	3800lm	230V		1200x37mm	80mm	12	Complete with 1000mA driver
38150AR/W/C	White	Cool white	4000K	40W	3600lm	230V		1200x68mm	80mm	12	Complete with 1000mA driver
38150AR/W/W	White	Warm white	3000K	40W	3600lm	230V		1200x68mm	80mm	12	Complete with 1000mA driver



38150BR/B/C

Recessed LED Linear Profiles



38150BR/W/C

38150BR | 40W | SMD 3030 | Recessed linear system | Aluminium

Can be connected in line.



90
CRI



UGR17

LED
BUILT IN

3
YEAR




38150BR/B/C



Complete with 6pcs fixing clips, 4pcs connectors & 2pcs end caps.

BAL
DRIVER
Page 763

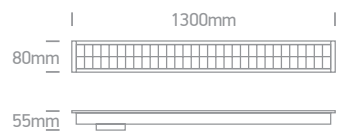

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class				Notes
38150BR/W/C	White	Cool white	4000K	40W	4000lm	34°	230V		1280x68mm	80mm	12	Complete with 1000mA driver
38150BR/W/W	White	Warm white	3000K	40W	4000lm	34°	230V		1280x68mm	80mm	12	Complete with 1000mA driver
38150BR/B/C	Black	Cool white	4000K	40W	4000lm	34°	230V		1280x68mm	80mm	12	Complete with 1000mA driver
38150BR/B/W	Black	Warm white	3000K	40W	4000lm	34°	230V		1280x68mm	80mm	12	Complete with 1000mA driver





The Office Floor Stand Range Aluminium





36002 | 60W | LED | Touch switch | Aluminium

EU Plug.

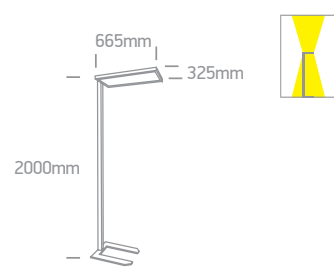

36004 | 75W | LED | Touch switch | Aluminium

EU Plug.

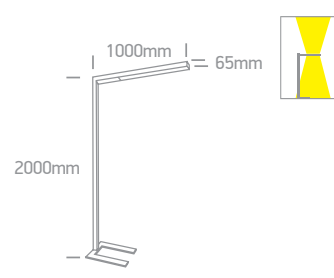

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
36002/W/C	White	Cool white	4000K	60W	8000lm	230V	⊕	1	Complete with 2x700mA drivers
36002/B/C	Black	Cool white	4000K	60W	8000lm	230V	⊕	1	Complete with 2x700mA drivers
36004/W/C	White	Cool white	4000K	75W	9700lm	230V	⊕	1	Complete with 700mA + 1200mA drivers
36004/B/C	Black	Cool white	4000K	75W	9700lm	230V	⊕	1	Complete with 700mA + 1200mA drivers