




Wall Recessed & Inground

Pages 625-656

19



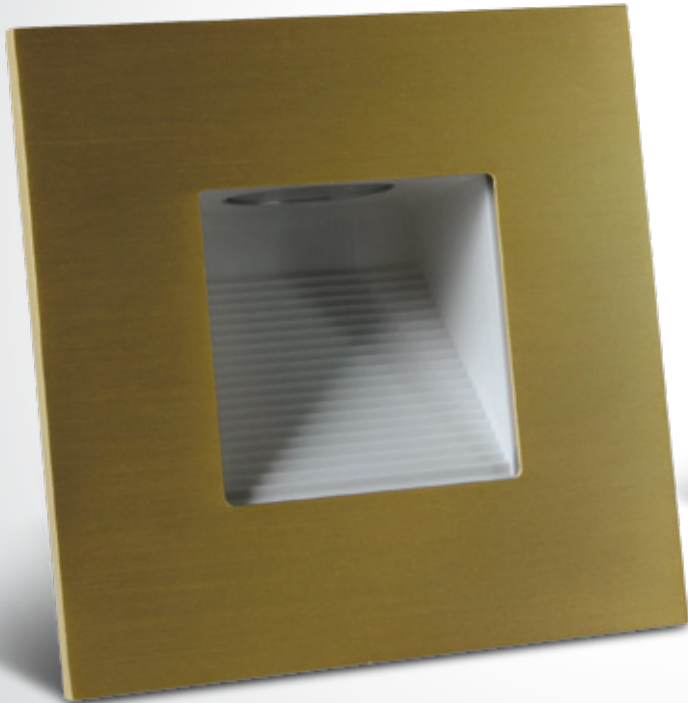

68006N/W + 050176/BBS



68007/W/W


Indoor Square Wall Recessed



68007/W/W

68007 | 1,5W | LED | Plastic


Supplied with box for concrete installation.



68007/B/W


68007 | 1,5W | LED | Plastic

Supplied with box for concrete installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class				Notes
68007/W/W	White	Warm white	3000K	1,5W	100lm	100-240V		86x86mm	40mm	50	Complete with driver
68007/B/W	Black	Warm white	3000K	1,5W	70lm	100-240V		86x86mm	40mm	50	Complete with driver

Dark Light Wall Recessed

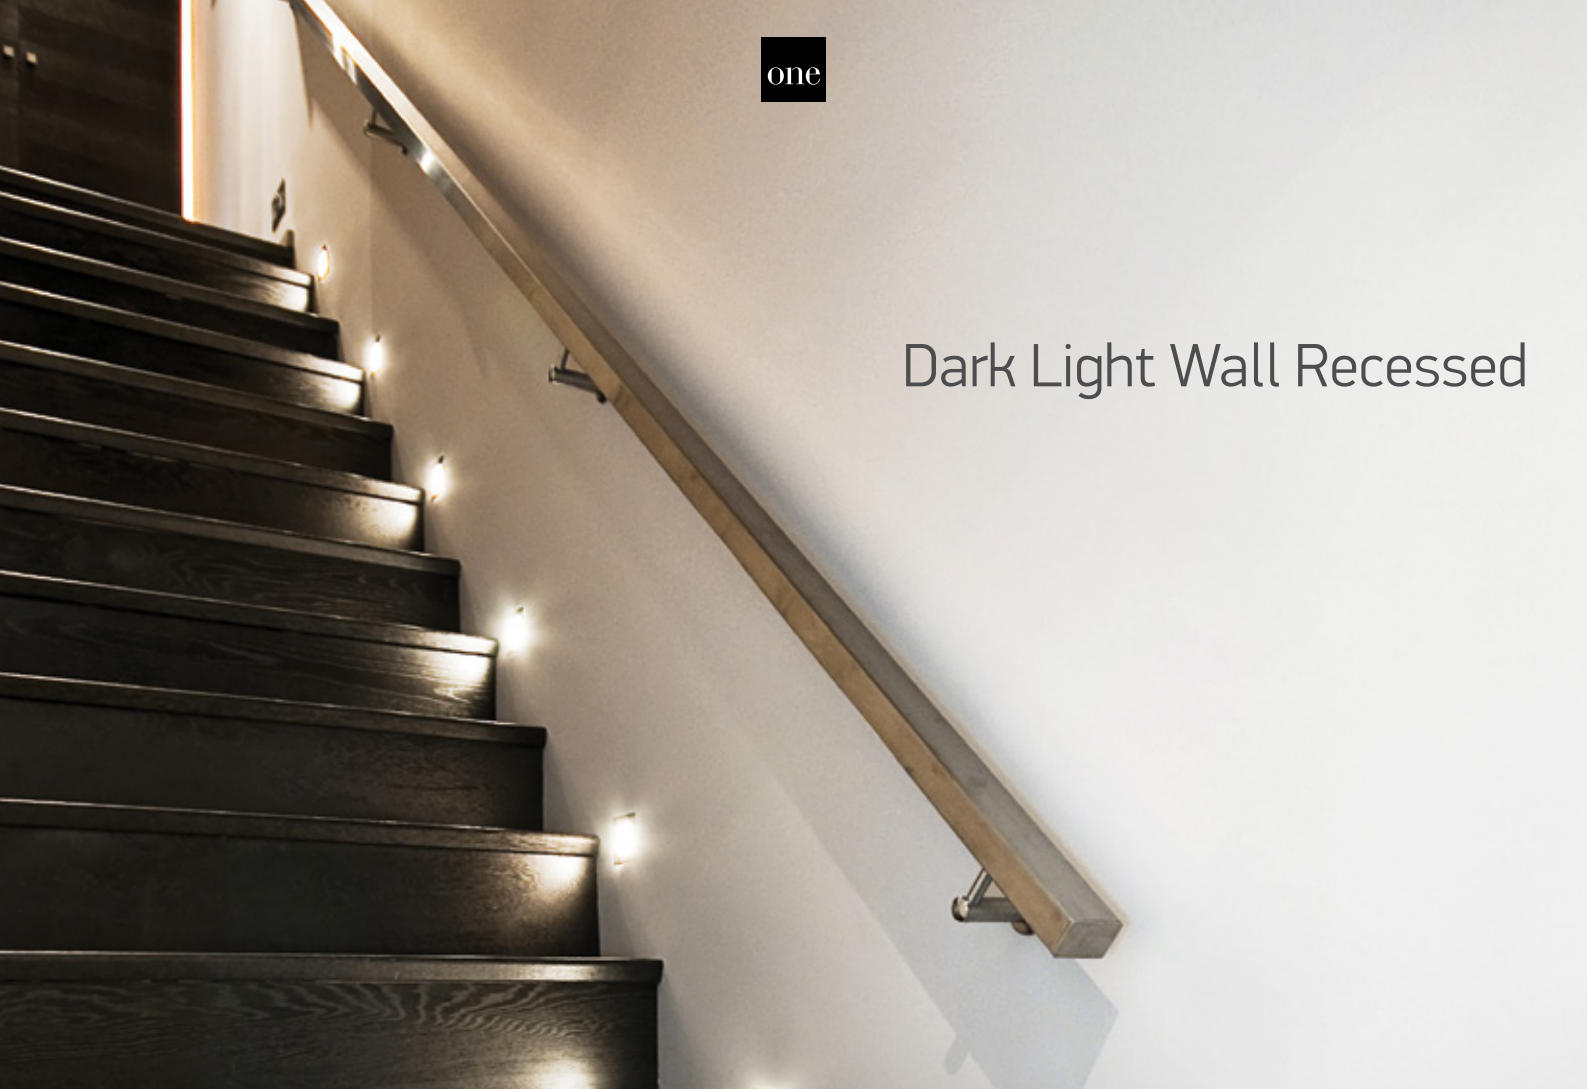



68006N | 1W | SMD 3535 | Die cast

Cover plate must be ordered separately.




DARK LIGHT
IP44


LED BUILT IN
90 CRI
CE
3 YEAR




050176/W White



050176/B Black



050176/G Grey




050176/BBS Brushed brass

68006N/BOX | Suitable for 68006N/W | Plastic

Gypsum installation.




CE
5

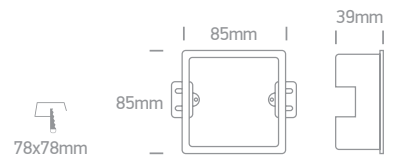

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	⊞	⌞	⏏	📦	Notes
68006N/W	White	Warm white	3000K	1W	80lm	230V	⊞	12cm	70x70mm	60mm	20	Complete with 350mA driver

Indoor Dark Light Wall Recessed

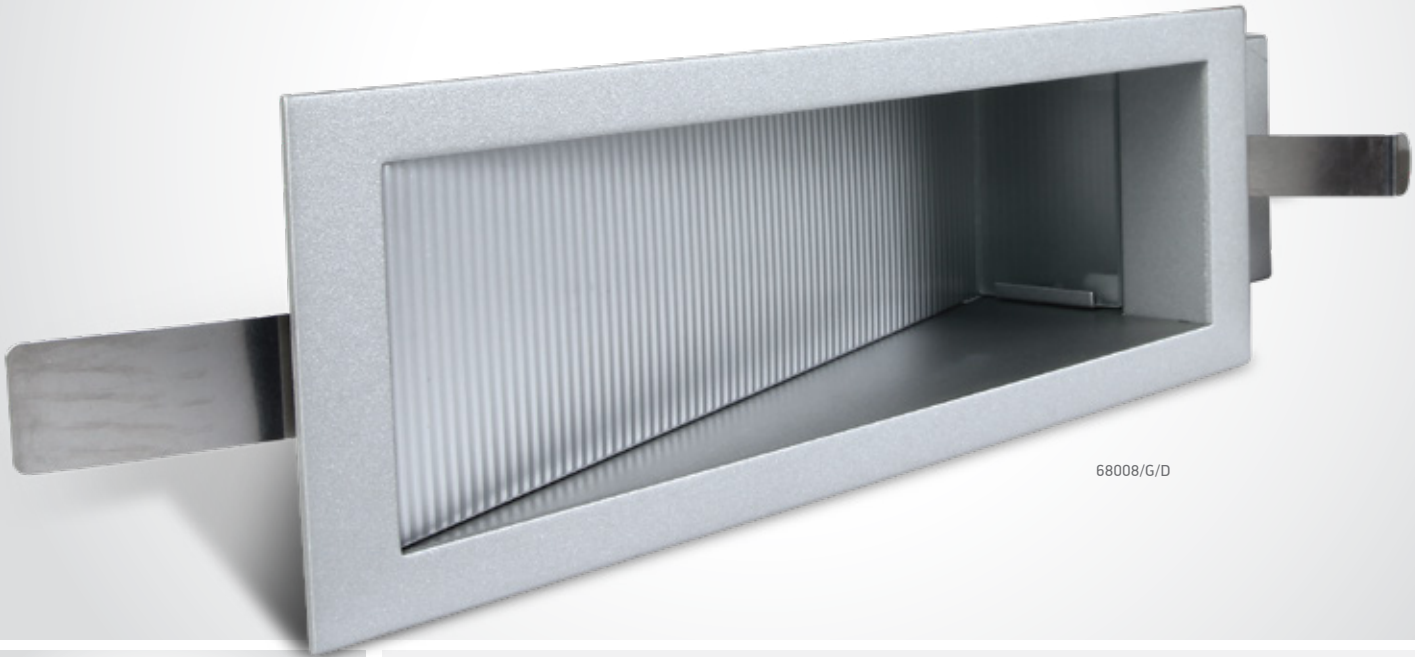


68008/G/D



68008/G/D

68008 | 1W | LED | Die cast


LED BUILT IN
 DIMMABLE
 QUICK FIX
 CE
 DARK LIGHT
 IP20
 2 YEAR offer



68008/G/W

68008 | 1W | LED | Die cast


LED BUILT IN
 DIMMABLE
 QUICK FIX
 CE
 DARK LIGHT
 IP20
 2 YEAR offer



68008/G/BL

68008 | 1W | LED | Die cast

LED BUILT IN
 DIMMABLE
 QUICK FIX
 CE
 DARK LIGHT
 IP20
 2 YEAR offer



Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class					Notes
68008/G/D	Grey	Daylight	6000K	1W	350mA		50cm	65x212mm	90mm	20	Requires 350mA driver
68008/G/W	Grey	Warm white	3000K	1W	350mA		50cm	65x212mm	90mm	20	Requires 350mA driver
68008/G/BL	Grey	Blue	-	1W	350mA		50cm	65x212mm	90mm	20	Requires 350mA driver






Indoor/Outdoor Decorative Wall Recessed Aluminium



68070 | 1W | COB LED | Aluminium

Driver can not pass through the cutout hole. Supplied with box for concrete installation.

IP65





68004 | 3W | COB LED | Aluminium

Supplied with box for concrete installation.

DARK LIGHT

IP54

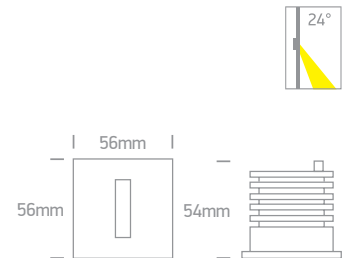


68004A | 1W | COB LED | Aluminium

Driver can not pass through the cutout hole. Supplied with box for concrete installation.

DARK LIGHT


IP54

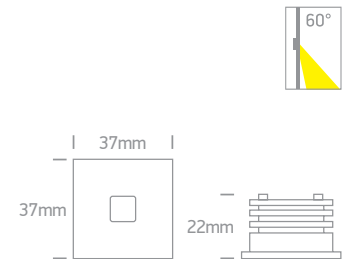




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Ⓢ	Concrete installation	Gypsum installation	Notes
68070/W/W	White	Warm white	3000K	1W	50lm	36°	350mA	Ⓢ	200cm	35mm 60mm	30mm 60mm	100 Requires 350mA driver
68070/B/W	Black	Warm white	3000K	1W	50lm	36°	350mA	Ⓢ	200cm	35mm 60mm	30mm 60mm	100 Requires 350mA driver
68070/AL/W	Aluminium	Warm white	3000K	1W	50lm	36°	350mA	Ⓢ	200cm	35mm 60mm	30mm 60mm	100 Requires 350mA driver
68004/W/W	White	Warm white	3000K	3W	120lm	24°	350mA	Ⓢ	200cm	52mm 110mm	49mm 70mm	36 Requires 350mA driver
68004/AL/W	Aluminium	Warm white	3000K	3W	120lm	24°	350mA	Ⓢ	200cm	52mm 110mm	49mm 70mm	36 Requires 350mA driver
68004A/W/W	White	Warm white	3000K	1W	40lm	60°	350mA	Ⓢ	200cm	35mm 50mm	33mm 30mm	60 Requires 350mA driver
68004A/AL/W	Aluminium	Warm white	3000K	1W	40lm	60°	350mA	Ⓢ	200cm	35mm 50mm	33mm 30mm	60 Requires 350mA driver






Indoor/Outdoor Dark Light Wall Recessed

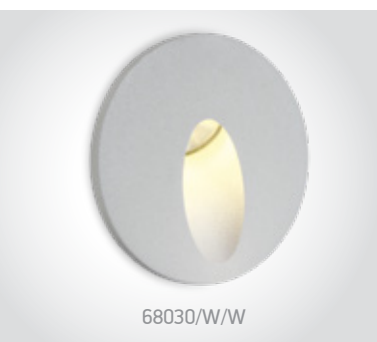



68030 | 3W | LED | Aluminium

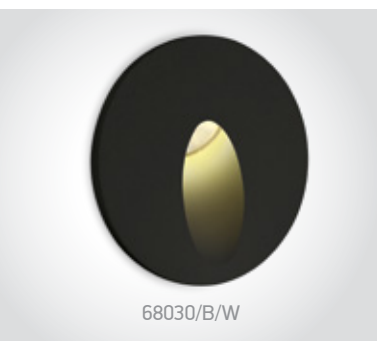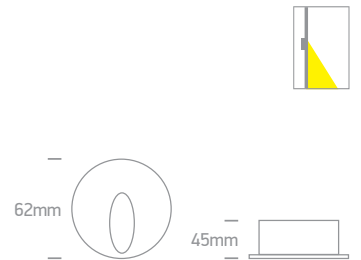

68030 | 3W | LED | Aluminium

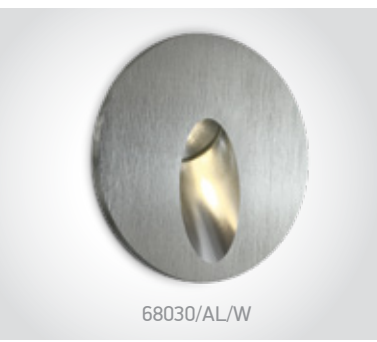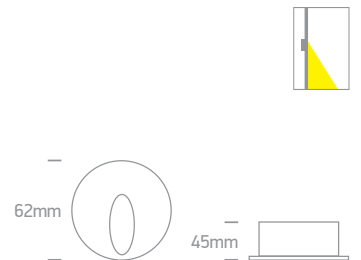

68030 | 3W | LED | Natural aluminium

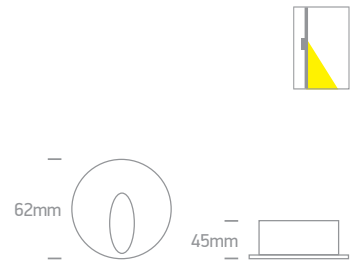

Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class	52mm	Concrete installation 110mm	Gypsum installation 50mm	30	Notes
68030/W/W	White	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver
68030/B/W	Black	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver
68030/AL/W	Aluminium	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver

68032/G/W


68032/AL/W

68030/AL/W





Indoor/Outdoor Dark Light Wall Recessed

68032 | 3W | LED | Die Cast

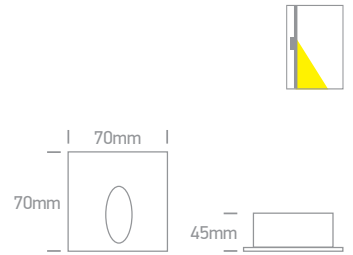


68032/W/W

68032 | 3W | LED | Die cast

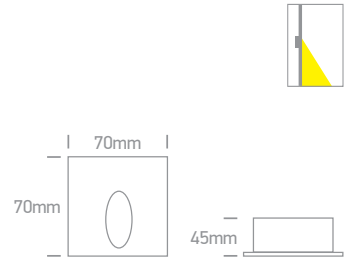



68032/B/W

68032 | 3W | LED | Die cast

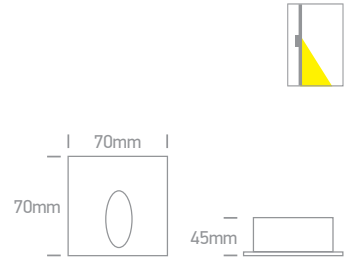

68032/G/W

68032 | 3W | LED | Natural aluminium

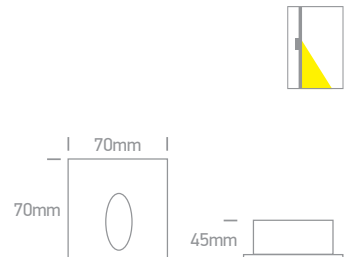


68032/AL/W

Order Code	Colour	Light Colour	CCT (K)	Watts	Input	Class					Notes
68032/W/W	White	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver
68032/B/W	Black	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver
68032/G/W	Grey	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver
68032/AL/W	Aluminium	Warm white	3000K	3W	100-240V		52mm	110mm	50mm	30	Complete with 700mA driver






Dark Light Step Series Aluminium

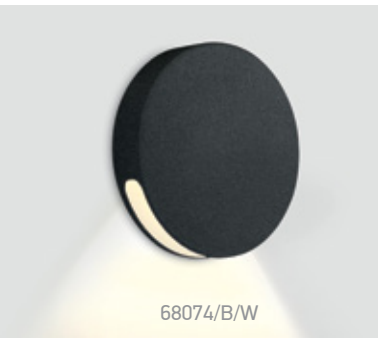


68074 | 2W | COB LED | Aluminium

90 CRI

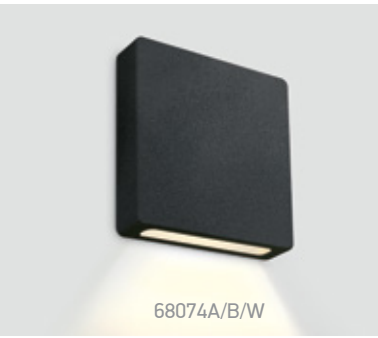


68074A | 2W | COB LED | Aluminium

90 CRI



68074B | 2W | COB LED | Aluminium

90 CRI



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
68074/W/W	White	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074/B/W	Black	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074A/W/W	White	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074A/B/W	Black	Warm white	3000K	2W	100lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074B/W/W	White	Warm white	3000K	2W	110lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver
68074B/B/W	Black	Warm white	3000K	2W	110lm	700mA		200cm	35mm	55mm	100	Requires 700mA driver



The Glass Face Recessed Lights





68076 | 3W | SMD LED | Glass + metal

Supplied with box for concrete installation.

LED BUILT IN
80 CRI
CE
2 YEAR

DARK LIGHT
IP65

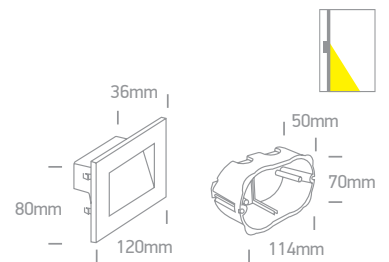


68076A | 4W | SMD LED | Glass + metal

Supplied with box for concrete installation.

LED BUILT IN
80 CRI
CE
2 YEAR

DARK LIGHT
IP65

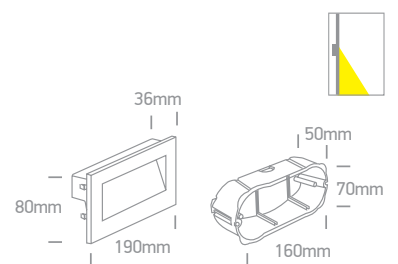

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation	Height	Box	Notes
68076/W/W	White	Warm white	3000K	3W	200lm	230V		115x70mm	2x68mm	55mm	12	AC LED
68076/B/W	Black	Warm white	3000K	3W	200lm	230V		115x70mm	2x68mm	55mm	12	AC LED
68076A/W/W	White	Warm white	3000K	4W	270lm	230V		160x70mm	3x68mm	55mm	12	AC LED
68076A/B/W	Black	Warm white	3000K	4W	270lm	230V		160x70mm	3x68mm	55mm	12	AC LED

Wall Recessed Pro Range



68072C/W

68072A/W



68072A | 5W | SMD 2835 | Stainless steel 316 + tempered glass




IP65



68072C | 10W | SMD 2835 | Stainless steel 316 + tempered glass



IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation	Height	Depth	Notes
68072A/W	Stainless steel	Warm white	3000K	5W	100lm	230V	⊕	112x42mm	98x35mm	75mm	24	Complete with 350mA driver
68072C/W	Stainless steel	Warm white	3000K	10W	200lm	230V	⊕	253x55mm	240x45mm	75mm	12	Complete with 350mA driver

Outdoor Dark Light Wall Recessed




Die cast



68068 | 3W | SMD 2835 | Die cast

Supplied with box for concrete installation.





LED BUILT IN
 80 CRI
 CE
 2 YEAR
 DARK LIGHT
 IP65

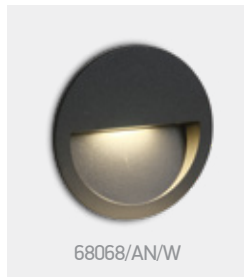

68068A | 4W | SMD 2835 | Die cast

Supplied with box for concrete installation.


LED BUILT IN
 80 CRI
 CE
 2 YEAR
 DARK LIGHT
 IP65



68068C | 7W | SMD 2835 | Die cast

Supplied with box for concrete installation.

LED BUILT IN
 80 CRI
 CE
 2 YEAR
 DARK LIGHT
 IP65



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation	Height	Box	Notes
68068/W/W	White	Warm white	3000K	3W	300lm	100-240V	⊕	110mm	100mm	60mm	24	Complete with 350mA driver
68068/AN/W	Anthracite	Warm white	3000K	3W	300lm	100-240V	⊕	110mm	100mm	60mm	24	Complete with 350mA driver
68068/G/W	Grey	Warm white	3000K	3W	300lm	100-240V	⊕	110mm	100mm	60mm	24	Complete with 350mA driver
68068A/W/W	White	Warm white	3000K	4W	300lm	100-240V	⊕	110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068A/AN/W	Anthracite	Warm white	3000K	4W	300lm	100-240V	⊕	110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068A/B/W	Black	Warm white	3000K	4W	300lm	100-240V	⊕	110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068A/G/W	Grey	Warm white	3000K	4W	300lm	100-240V	⊕	110x110mm	100x100mm	60mm	24	Complete with 350mA driver
68068C/W/W	White	Warm white	3000K	7W	550lm	100-240V	⊕	220x70mm	210x60mm	80mm	12	Complete with 350mA driver
68068C/AN/W	Anthracite	Warm white	3000K	7W	550lm	100-240V	⊕	220x70mm	210x60mm	80mm	12	Complete with 350mA driver
68068C/B/W	Black	Warm white	3000K	7W	550lm	100-240V	⊕	220x70mm	210x60mm	80mm	12	Complete with 350mA driver
68068C/G/W	Grey	Warm white	3000K	7W	550lm	100-240V	⊕	220x70mm	210x60mm	80mm	12	Complete with 350mA driver



68048/AN/W



68062/W/W


Outdoor Wall Recessed Die cast



68048/AN/W

68048 | 4x1W | LED | Die cast


Supplied with box for concrete installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	⚡	↕	📦	Notes
68048/AN/W	Anthracite	Warm white	3000K	4x1W	280lm	100-240V	⊕	170x90mm	100mm	12	Complete with 350mA driver

Outdoor Dark Light Wall Recessed



Die cast

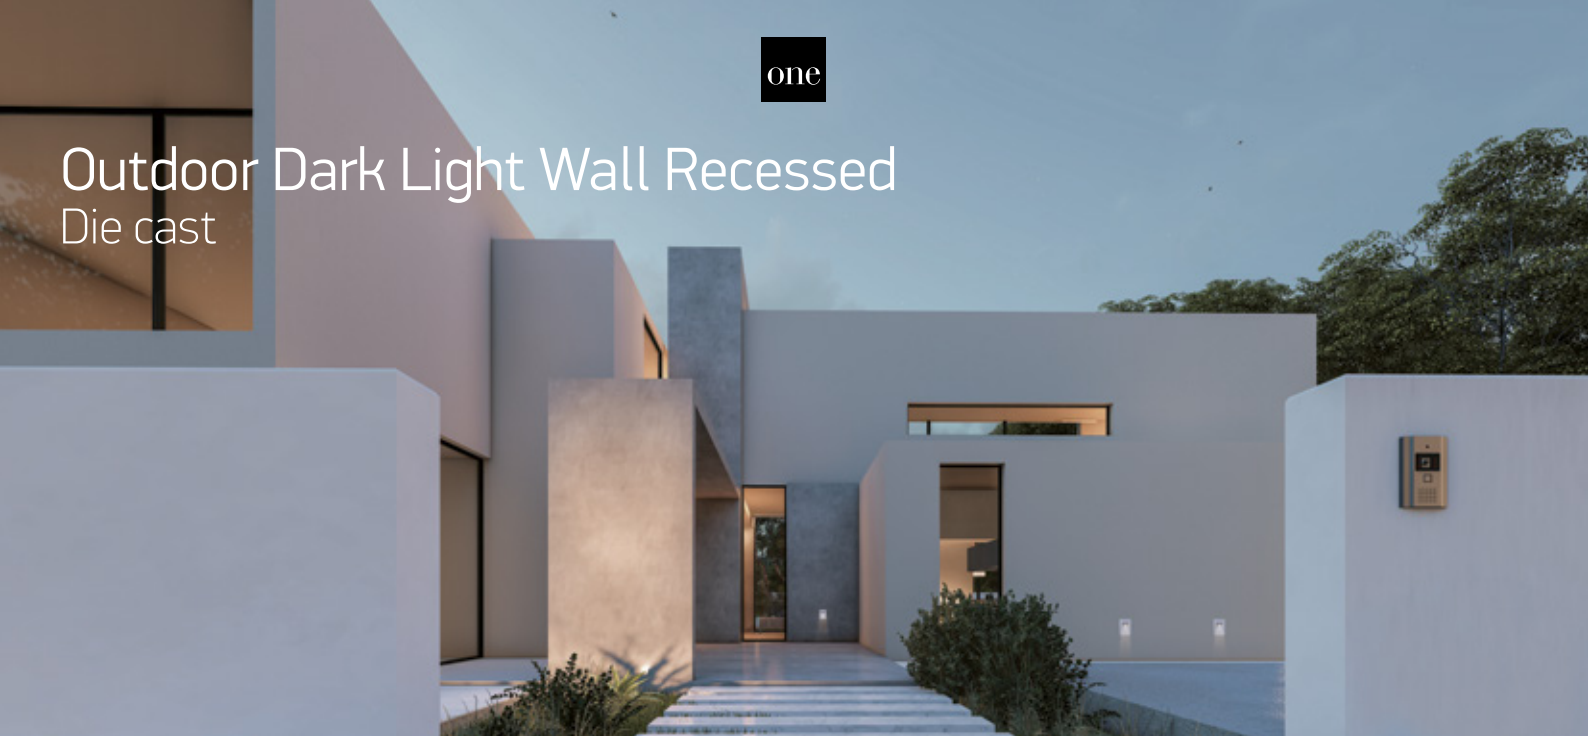

68062 | 3,6W | LED | Die cast

Supplied with box for concrete installation.


LED BUILT IN
 80 CRI CE 2 YEAR
 DARK LIGHT
 IP65

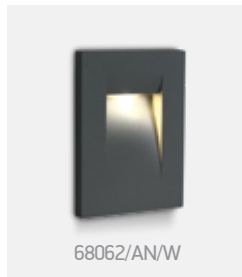

68064 | 3,6W | LED | Die cast

Supplied with box for concrete installation.



LED BUILT IN
 80 CRI CE 2 YEAR
 DARK LIGHT
 IP65




68066 | 8,5W | SMD LED | Die cast

Supplied with box for concrete installation.

LED BUILT IN
 80 CRI CE 2 YEAR
 DARK LIGHT
 IP65

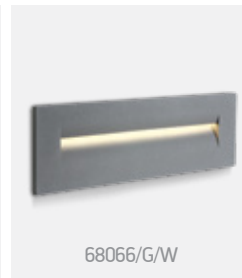

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Concrete installation	Gypsum installation	Height	Width	Notes
68062/W/W	White	Warm white	3000K	3,6W	100lm	53°	100-240V	⊕	62x97mm	60x95mm	65mm	24	Complete with 350mA driver
68062/AN/W	Anthracite	Warm white	3000K	3,6W	100lm	53°	100-240V	⊕	62x97mm	60x95mm	65mm	24	Complete with 350mA driver
68064/W/W	White	Warm white	3000K	3,6W	85lm	44°	100-240V	⊕	97x62mm	95x60mm	65mm	24	Complete with 350mA driver
68064/AN/W	Anthracite	Warm white	3000K	3,6W	85lm	44°	100-240V	⊕	97x62mm	95x60mm	65mm	24	Complete with 350mA driver
68064/G/W	Grey	Warm white	3000K	3,6W	85lm	44°	100-240V	⊕	97x62mm	95x60mm	65mm	24	Complete with 350mA driver
68066/W/W	White	Warm white	3000K	8,5W	160lm	44°	100-240V	⊕	238x74mm	238x74mm	80mm	12	Complete with 500mA driver
68066/AN/W	Anthracite	Warm white	3000K	8,5W	160lm	44°	100-240V	⊕	238x74mm	238x74mm	80mm	12	Complete with 500mA driver
68066/G/W	Grey	Warm white	3000K	8,5W	160lm	44°	100-240V	⊕	238x74mm	238x74mm	80mm	12	Complete with 500mA driver

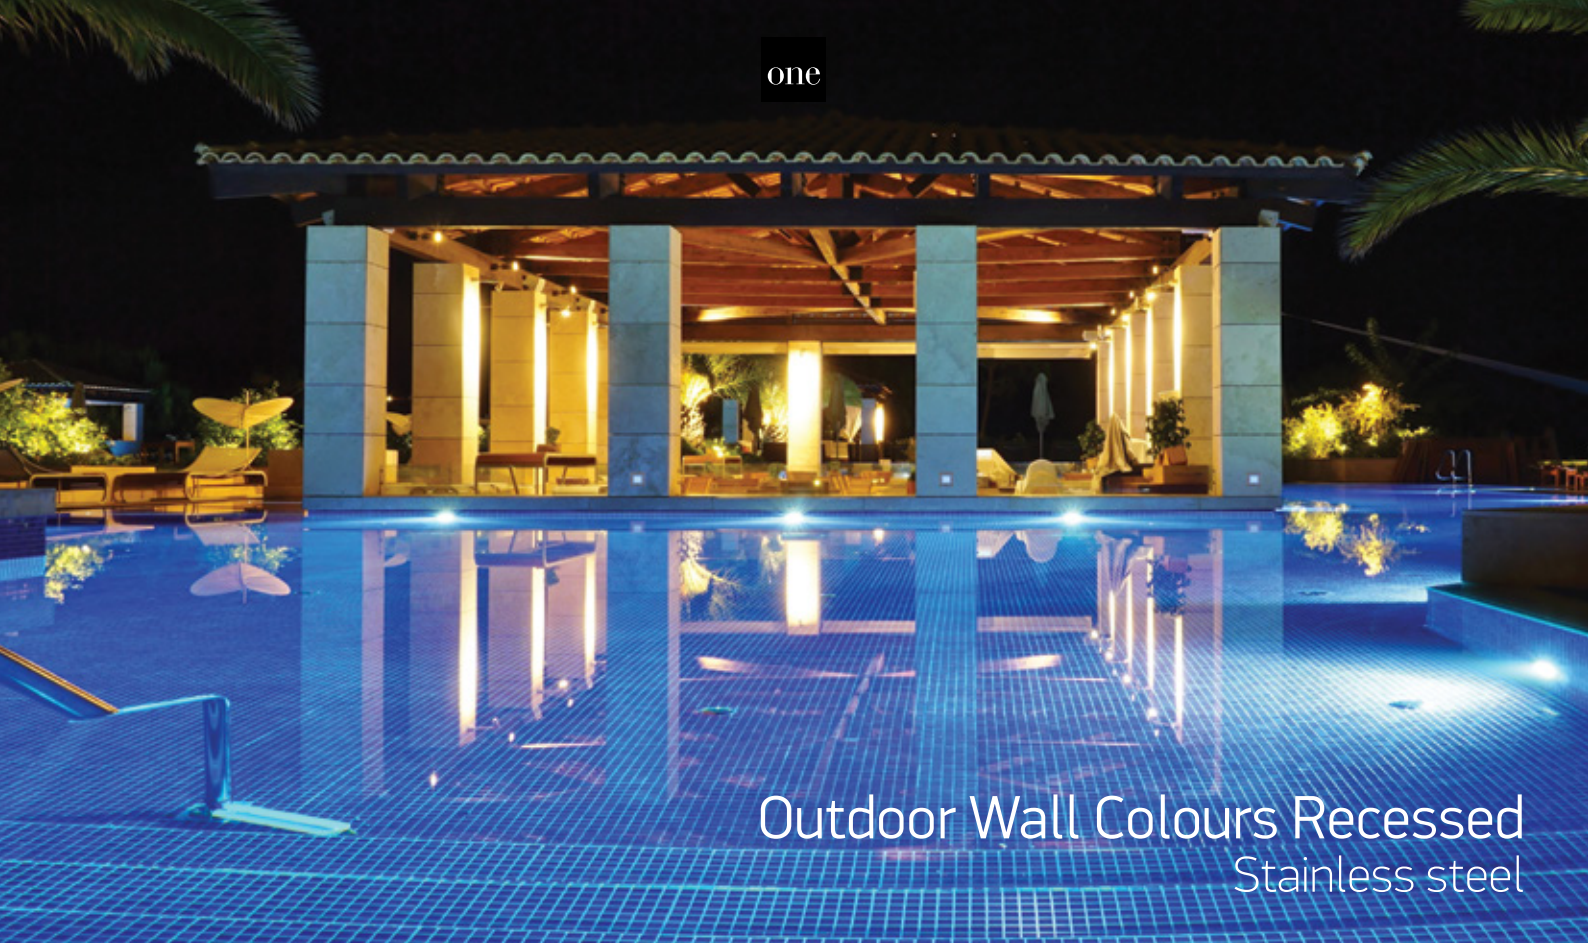


Outdoor Wall Colours Recessed Stainless steel



68001 | 1,6W | LED | Stainless steel




IP54
offer



68001 | 1,6W | LED | Stainless steel




IP54
offer



68002 | 1,2W | LED | Stainless steel



IP54
offer



Order Code	Colour	Light Colour	Watts	Input	Class	Concrete installation	Gypsum installation	Height	Quantity	Notes
68001/BL	Stainless steel	Blue	1,6W	230V	⊕	97x97mm	90x90mm	65mm	18	Complete with driver
68001/R	Stainless steel	Red	1,6W	230V	⊕	97x97mm	90x90mm	65mm	18	Complete with driver
68002/R	Stainless steel	Red	1,2W	230V	⊕	105x35mm	100x35mm	65mm	40	Complete with driver



one

Outdoor Wall Recessed




68080B | 3W | SMD 2835 | ABS + PC

Supplied with box for concrete installation.




80 CRI CE 3 YEAR

IP65

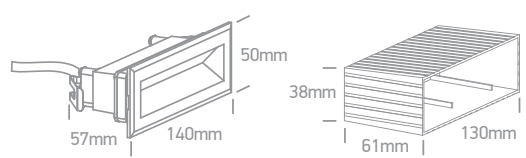

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Concrete installation	Gypsum installation	Height	Quantity	Notes
68080B/B/W	Black	Warm white	3000K	3W	150lm	230V	□	131x39mm	125x35mm	70mm	40	AC LED

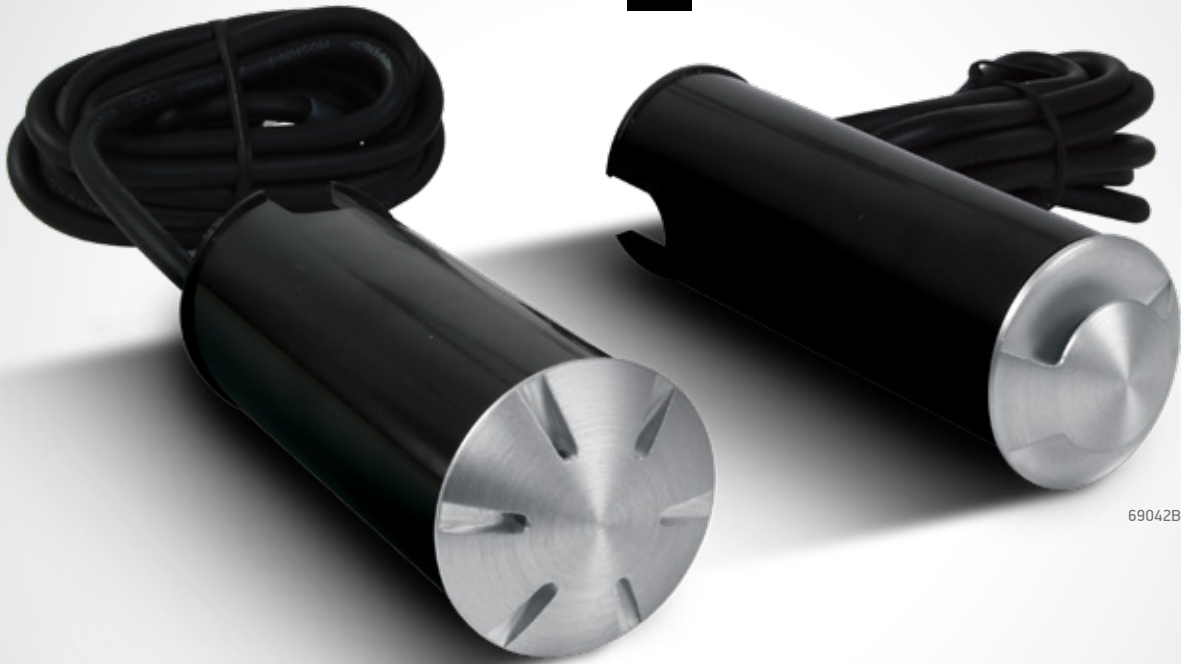


69044/AL/W

69042B/AL/W



The Inground Mini Series

Natural aluminium

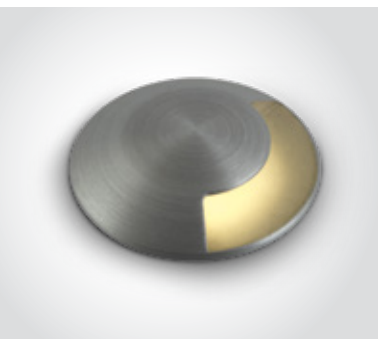


69042A | 1W | SMD LED | Natural aluminium

Supplied with box for concrete installation.

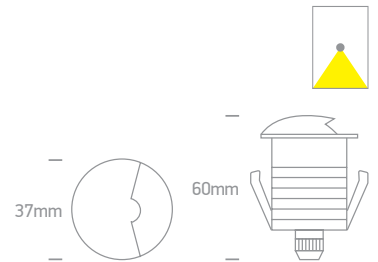


IP67

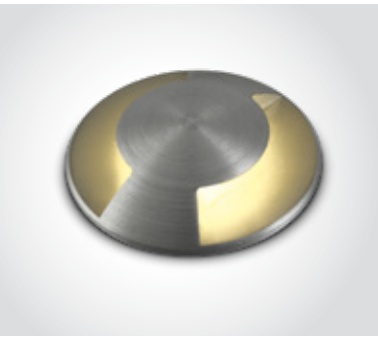


69042B | 1W | SMD LED | Natural aluminium

Supplied with box for concrete installation.


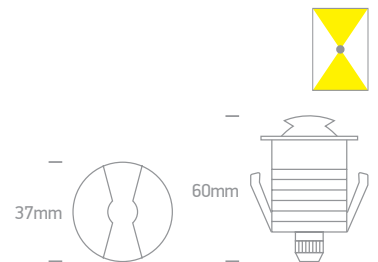


IP67

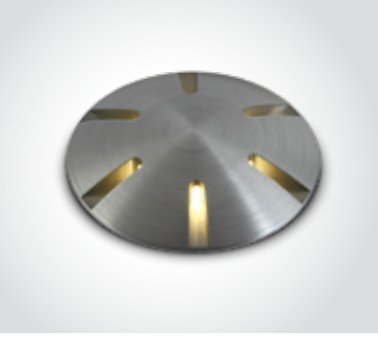

69044 | 1W | LED | Natural aluminium

Supplied with box for concrete installation.

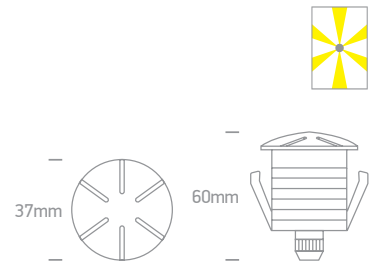


IP67

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Decking	Concrete	Decking	Concrete	Notes
69042A/AL/W	Aluminium	Warm white	3000K	1W	30lm	350mA	III	200cm	30mm	35mm	80mm	95mm+300mm drainage 50 Requires 350mA driver
69042B/AL/W	Aluminium	Warm white	3000K	1W	50lm	350mA	III	200cm	30mm	35mm	80mm	95mm+300mm drainage 50 Requires 350mA driver
69044/AL/W	Aluminium	Warm white	3000K	1W	30lm	350mA	III	200cm	30mm	35mm	80mm	95mm+300mm drainage 50 Requires 350mA driver



The Inground Midi Series

Natural aluminium

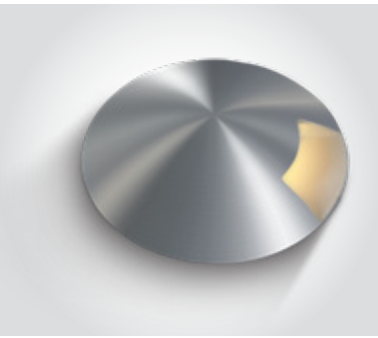



69015A | 3W | Aluminium

Supplied with box for concrete installation.



LED BUILT IN
90 CRI


2 YEAR

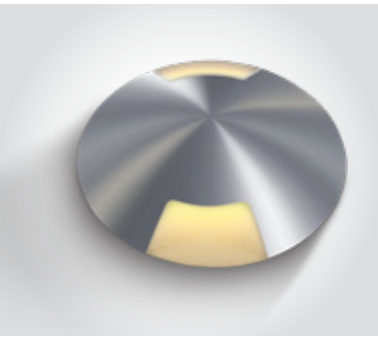

69015B | 3W | Aluminium

Supplied with box for concrete installation.



LED BUILT IN
90 CRI


2 YEAR

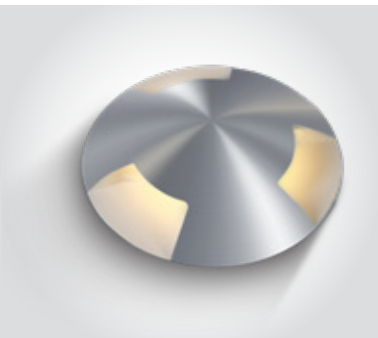
69015C | 3W | Aluminium








Supplied with box for concrete installation.




LED BUILT IN
90 CRI


2 YEAR



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69015A/AL/W	Aluminium	Warm white	3000K	3W	30lm	24V DC		200cm	52mm	90mm + 300mm drainage	32	Requires 24V DC driver
69015B/AL/W	Aluminium	Warm white	3000K	3W	60lm	24V DC		200cm	52mm	90mm + 300mm drainage	32	Requires 24V DC driver
69015C/AL/W	Aluminium	Warm white	3000K	3W	80lm	24V DC		200cm	52mm	90mm + 300mm drainage	32	Requires 24V DC driver

The Inground Maxi Series LED Aluminium

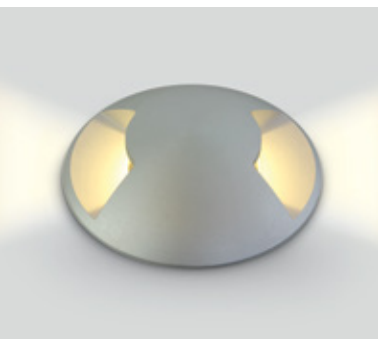


69016 | 3W | LED | Aluminium

Supplied with box for concrete installation.





IP67

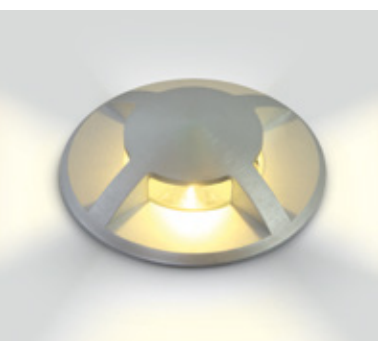


69016A | 3W | LED | Aluminium

Supplied with box for concrete installation.




IP67

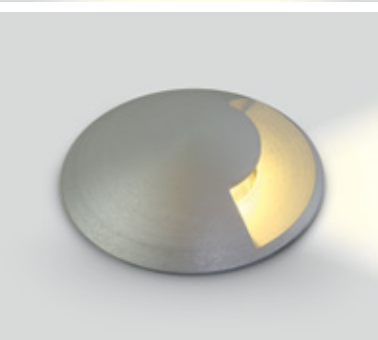

69016B | 3W | LED | Aluminium

Supplied with box for concrete installation.




IP67

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	⏏	⚙	⏏	📦	Notes
69016/W	Aluminium	Warm white	3000K	3W	120lm	100-240V	⏏	200cm	77mm	130mm+300mm drainage	18	Complete with 350mA driver
69016A/W	Aluminium	Warm white	3000K	3W	150lm	100-240V	⏏	200cm	77mm	130mm+300mm drainage	18	Complete with 350mA driver
69016B/W	Aluminium	Warm white	3000K	3W	100lm	100-240V	⏏	200cm	77mm	130mm+300mm drainage	18	Complete with 350mA driver



The Inground Maxi Series GU10 Aluminium


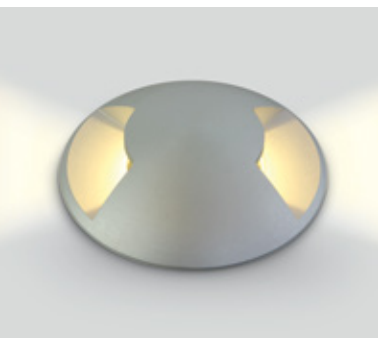


69016G | 10W | MR16 | GU10 | Aluminium

Supplied with box for concrete installation.



IP67

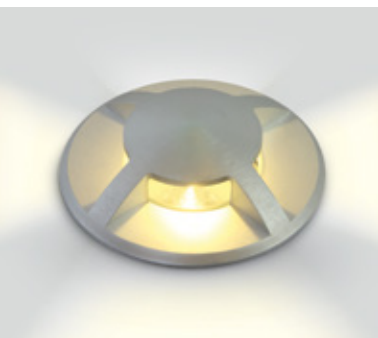



69016AG | 10W | MR16 | GU10 | Aluminium

Supplied with box for concrete installation.



IP67

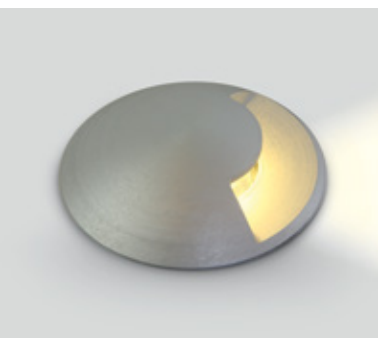


69016BG | 10W | MR16 | GU10 | Aluminium

Supplied with box for concrete installation.




IP67



Order Code	Colour	Watts	Input	Class					Notes
69016G	Aluminium	10W	100-240V		200cm	80mm	130mm+300mm drainage	18	1 gland
69016AG	Aluminium	10W	100-240V		200cm	80mm	130mm+300mm drainage	18	1 gland
69016BG	Aluminium	10W	100-240V		200cm	80mm	130mm+300mm drainage	18	1 gland




The Inground Mini Series

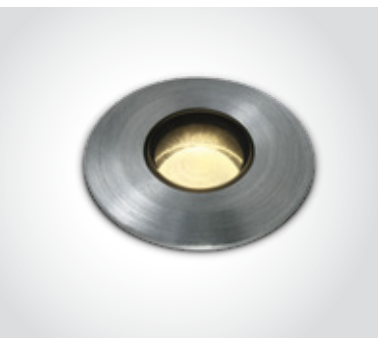



69042M | 1W/2W | LED | 1W@350mA / 2W@700mA | Aluminium

Supplied with box for concrete installation.



69042 | 1W/2W | SMD LED | 1W@350mA / 2W@700mA | Natural Aluminium

Supplied with box for concrete installation.

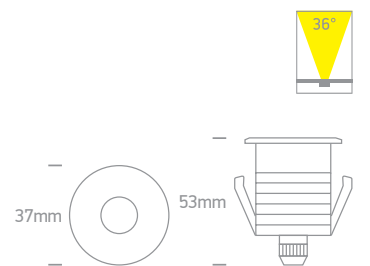


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	S	Gypsum/Decking	Concrete	Decking	Concrete	Notes
69042M/AL/W	Aluminium	Warm white	3000K	1W/2W	150lm	24°	350mA/700mA	II	200cm	22mm	26mm	60mm	95+300mm drainage	50 Requires 350mA/700mA driver
69042/AL/W	Aluminium	Warm white	3000K	1W/2W	150lm	36°	350mA/700mA	II	200cm	30mm	35mm	80mm	95+300mm drainage	50 Requires 350mA/700mA driver



69052/W


69052A/W

The COB Honeycomb Range

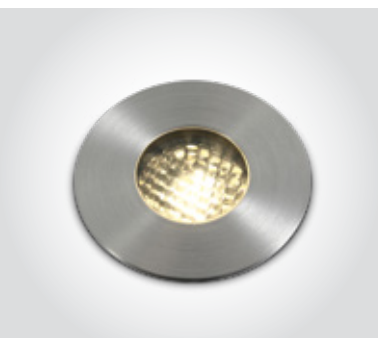


69052 | 3W | COB LED | Stainless steel 316 + tempered glass

Supplied with box for concrete installation.

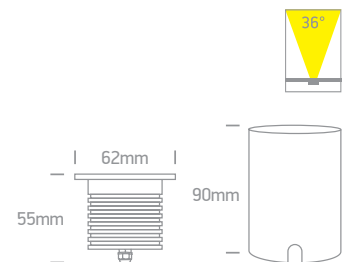


IP67

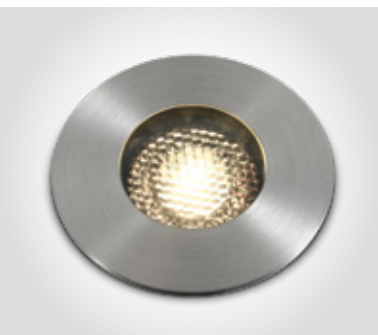

69052A | 13W | COB LED | Aluminium

Supplied with box for concrete installation.

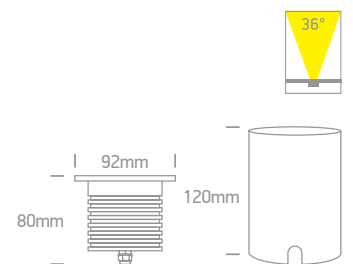

IP67

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	⏏	⏏	⏏	Notes
69052/W	Stainless steel	Warm white	3000K	3W	240lm	36°	24V DC	⏏	200cm	52mm	100mm+300mm drainage	50	Requires 24V DC driver
69052A/W	Aluminium	Warm white	3000K	13W	1000lm	36°	350mA	⏏	200cm	75mm	140mm+300mm drainage	24	Requires 350mA driver




The Dark Light Inground Range Aluminium




69056A | 3W | COB LED | Aluminium

Supplied with box for concrete installation.




69056B | 7W | COB LED | Aluminium

Supplied with box for concrete installation.



69056C | 9W | COB LED | Aluminium

Supplied with box for concrete installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69056A/W	Aluminium	Warm white	3000K	3W	240lm	38°	24V DC		200cm	50mm	100mm+300mm drainage	50	Requires 24V DC driver
69056B/W	Aluminium	Warm white	3000K	7W	560lm	38°	24V DC		200cm	60mm	100mm+300mm drainage	36	Requires 24V DC driver
69056C/W	Aluminium	Warm white	3000K	9W	720lm	38°	24V DC		200cm	70mm	135mm+300mm drainage	24	Requires 24V DC driver



69070A/W

69070C/W

The Dark Light Inground Range



69070A | 3,5W | COB LED | Stainless steel 316L + Die cast aluminium body

Supplied with box for concrete installation.














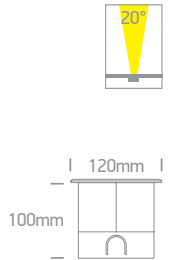

69070B | 10W | COB LED | Stainless steel 316L + Die cast aluminium body

Supplied with box for concrete installation.















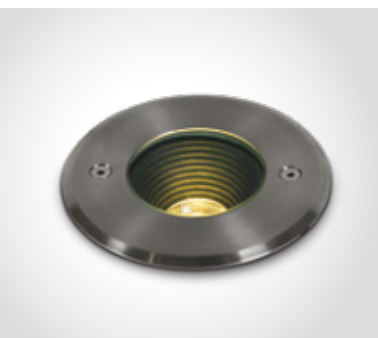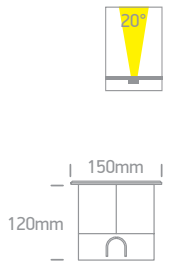

69070C | 15W | COB LED | Stainless steel 316L + Die cast aluminium body

Supplied with box for concrete installation.














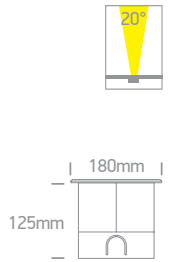








Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69070A/W	Stainless steel	Warm white	3000K	3,5W	300lm	20°	230V		200cm	100mm	120mm + 300mm drainage	18	Complete with driver
69070B/W	Stainless steel	Warm white	3000K	10W	800lm	20°	230V		200cm	137mm	140mm + 300mm drainage	8	Complete with driver
69070C/W	Stainless steel	Warm white	3000K	15W	1200lm	20°	230V		200cm	165mm	155mm + 300mm drainage	6	Complete with driver



The COB Inground Range Stainless steel




69040 | 10W | COB LED | Stainless steel 316





IP67



69050 | 20W | COB LED | Dimmable | Stainless steel 316 + tempered glass




IP67

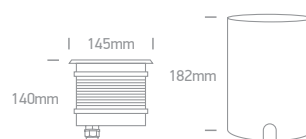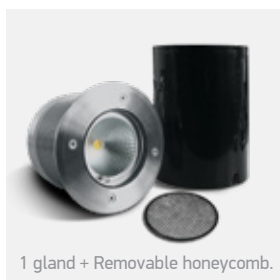



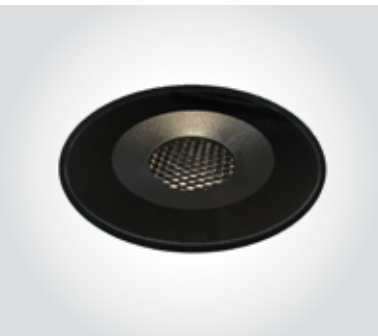


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	☔	⬆️	📦	Notes
69040/W	Stainless steel	Warm white	3000K	10W	700lm	40°	230V	⊕	200cm	106mm	185mm+300mm drainage	6	Complete with 500mA driver
69050/C	Stainless steel	Cool white	4000K	20W	1800lm	25°	230V	⊕	200cm	132mm	200mm+300mm drainage	6	AC LED
69050/W	Stainless steel	Warm white	3000K	20W	1800lm	25°	230V	⊕	200cm	132mm	200mm+300mm drainage	6	AC LED


The Trimless Inground Range







69060 | 6W | LED | Trimless | Die cast + Glass

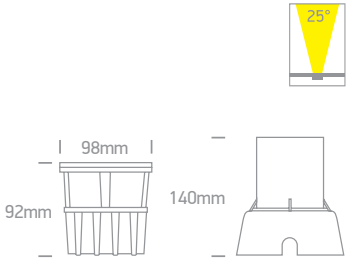Supplied with box for concrete installation.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69060/B/W	Black	Warm white	3000K	6W	460lm	25°	100-240V		200cm	136mm	150mm+300mm drainage	6	Complete with 500mA driver




The COB Inground Adjustable Range Stainless steel



69054 | 15W | COB LED | Dimmable | Stainless steel 316 + tempered glass

Supplied with box for concrete installation.


IP67

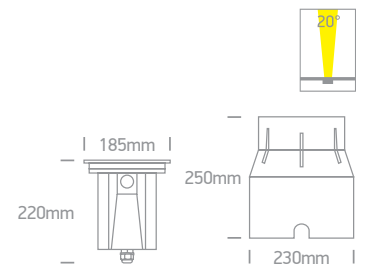

69054A | 30W | COB LED | Dimmable | Stainless steel 316 + tempered glass

Supplied with box for concrete installation.

IP67

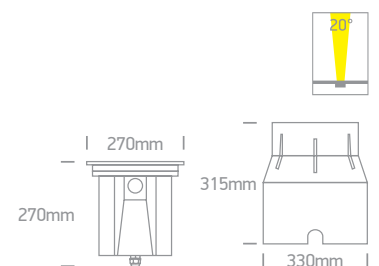

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69054/W	Stainless steel	Warm white	3000K	15W	840lm	20°	230V		200cm	230mm	270mm+300mm drainage	2	AC LED
69054A/W	Stainless steel	Warm white	3000K	30W	2000lm	20°	230V		200cm	330mm	330mm+300mm drainage	1	AC LED




The Inground Tiltable Range

69072 | 3W | COB LED | Stainless steel 316L + Die cast aluminium body | Tiltable beam





LED BUILT IN
 80 CRI
 IK¹⁰
 ADJUSTABLE
 CE
 2 YEAR
 new
 IP67
 DARK LIGHT

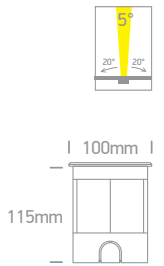

69074A | 3x1,5W | COB LED | Stainless steel 316L + Die cast aluminium body | Tiltable beam





LED BUILT IN
 80 CRI
 IK¹⁰
 ADJUSTABLE
 CE
 2 YEAR
 new
 IP67
 DARK LIGHT

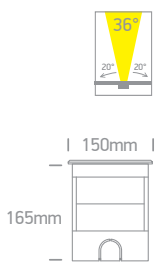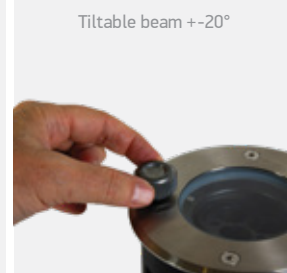

69074B | 9x1,5W | COB LED | Stainless steel 316L + Die cast aluminium body | Tiltable beam




LED BUILT IN
 80 CRI
 IK¹⁰
 ADJUSTABLE
 CE
 2 YEAR
 new
 IP67
 DARK LIGHT

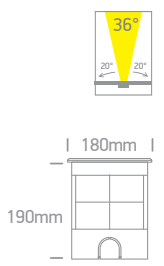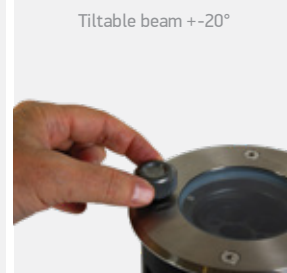

69074C | 12x1,5W | COB LED | Stainless steel 316L + Die cast aluminium body | Tiltable beam



LED BUILT IN
 80 CRI
 IK¹⁰
 ADJUSTABLE
 CE
 2 YEAR
 new
 IP67
 DARK LIGHT



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class					Notes
69072/W	Stainless steel	Warm white	3000K	3W	210lm	5°	230V		200cm	90mm	135mm + 300mm drainage	18	Complete with driver
69074A/W	Stainless steel	Warm white	3000K	3x1,5W	320lm	36°	230V		200cm	140mm	185mm + 300mm drainage	8	Complete with driver
69074B/W	Stainless steel	Warm white	3000K	9x1,5W	1000lm	36°	230V		200cm	170mm	210mm + 300mm drainage	4	Complete with driver
69074C/W	Stainless steel	Warm white	3000K	12x1,5W	1250lm	36°	230V		200cm	200mm	270mm + 300mm drainage	2	Complete with driver

The Asymmetric Inground Stainless steel




69062 | 8W | SMD 2835 | Asymmetrical | Stainless steel 316 + Die cast

Supplied with box for concrete installation.




IP67

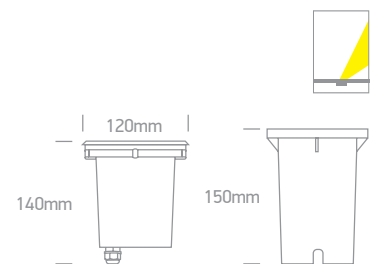

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	⏏	⚡	⏏	📦	Notes
69062/W	Stainless steel	Warm white	3000K	8W	180lm	230V	⏏	⚡	⏏	⏏	12	Complete with 350mA driver




69058A/G/W

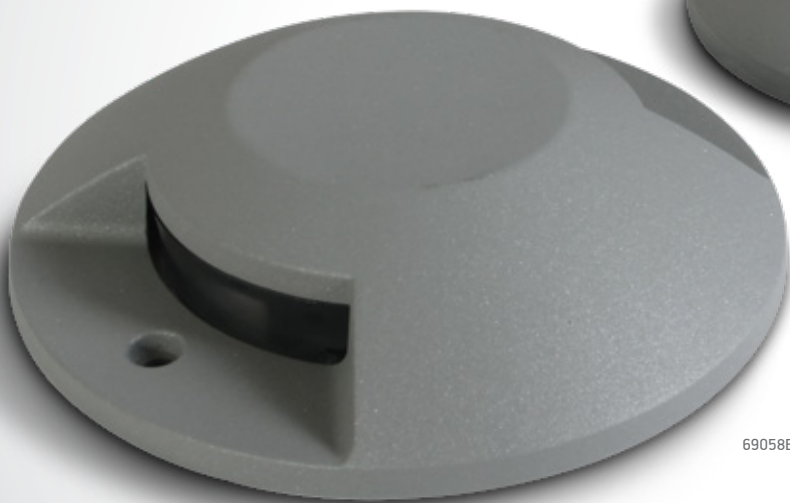

69058B/G/W


Ground Surface Mounted Range

Die cast

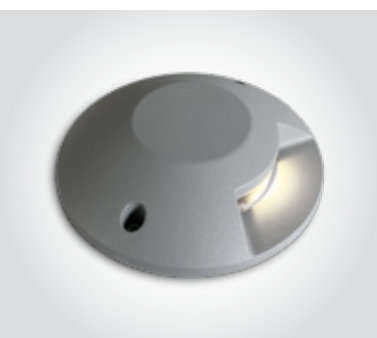


69058A | 6W | COB LED | Die cast

Surface mounted - No hole required.





IP67

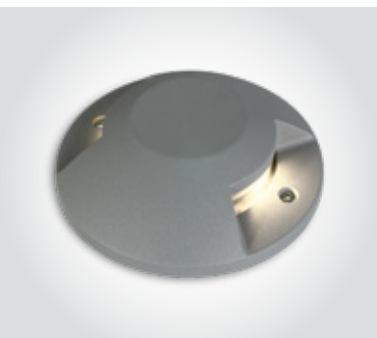


69058B | 2x6W | COB LED | Die cast

Surface mounted - No hole required.




IP67

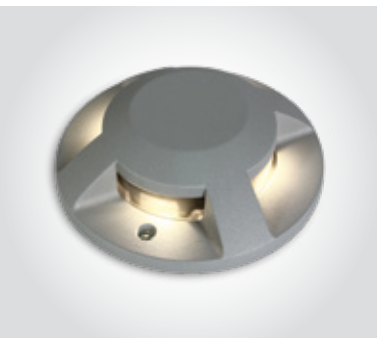

69058C | 4x3W | COB LED | Die cast

Surface mounted - No hole required.



IP67

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
69058A/G/W	Grey	Warm white	3000K	6W	300lm	230V	⊕	12	Complete with 500mA driver
69058B/G/W	Grey	Warm white	3000K	2x6W	600lm	230V	⊕	12	Complete with 500mA driver
69058C/G/W	Grey	Warm white	3000K	4x3W	600lm	230V	⊕	12	Complete with 300mA driver

The GU10 Inground Range

Stainless steel 316




69006G | 10W | MR16 | GU10 | Stainless steel 316

Supplied with box for concrete installation.



IP67

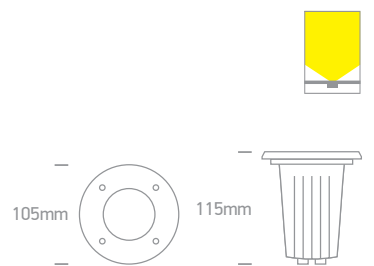

Order Code	Colour	Watts	Input	Class	Light Type	Mounting	Box	Notes
69006G	Stainless steel	10W	100-240V	⊕	MR16	160mm+300mm drainage	20	2 glands



The GU10 Inground Adjustable Range Stainless steel 316




69046G | 10W | MR16 | GU10 | Stainless steel 316

Supplied with box for concrete installation.



CE 2 YEAR

IP67

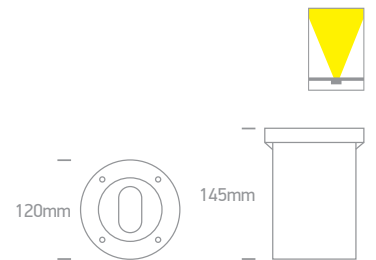


69048G | 10W | MR16 | GU10 | Stainless steel 316

Supplied with box for concrete installation.



CE 2 YEAR

IP67

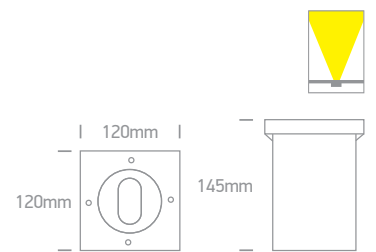

Order Code	Colour	Watts	Input	Class					Notes
69046G	Stainless steel	10W	100-240V		200cm	115mm	160mm+300mm drainage	12	2 glands
69048G	Stainless steel	10W	100-240V		200cm	115mm	160mm+300mm drainage	12	2 glands



The GX53 Inground Range Stainless steel



69006 | 9W | GX53 | Stainless steel


Supplied with box for concrete installation.



IP67



Suitable for GX53 LED lamp.

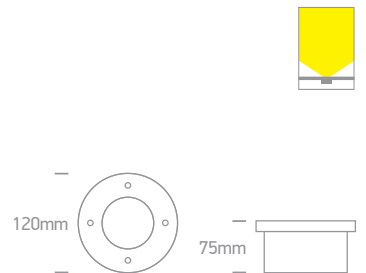

69008 | 9W | GX53 | Stainless steel


Supplied with box for concrete installation.



IP67



Suitable for GX53 LED lamp.

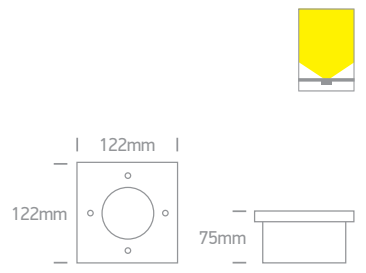


Order Code	Colour	Watts	Input	Class				Notes
69006	Stainless steel	9W	100-240V		110mm	90mm+300mm drainage	20	-
69008	Stainless steel	9W	100-240V		110mm	90mm+300mm drainage	20	-

Inground Decking Sets




69002A | 6x0,5W | SMD 2835 | Stainless steel 316

Decking set lights.



IP67

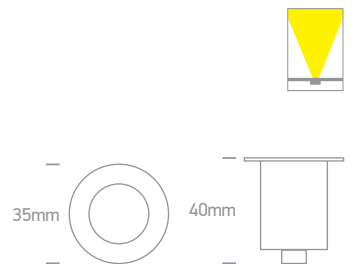

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class					Notes
69002A/W	Stainless steel	Warm white	3000K	6x0,5W	40lm/LED	230V		2m/2m	30mm	60mm	6	Complete with 12V DC driver