




# Industrial & Floodlights

Pages 699-724

21

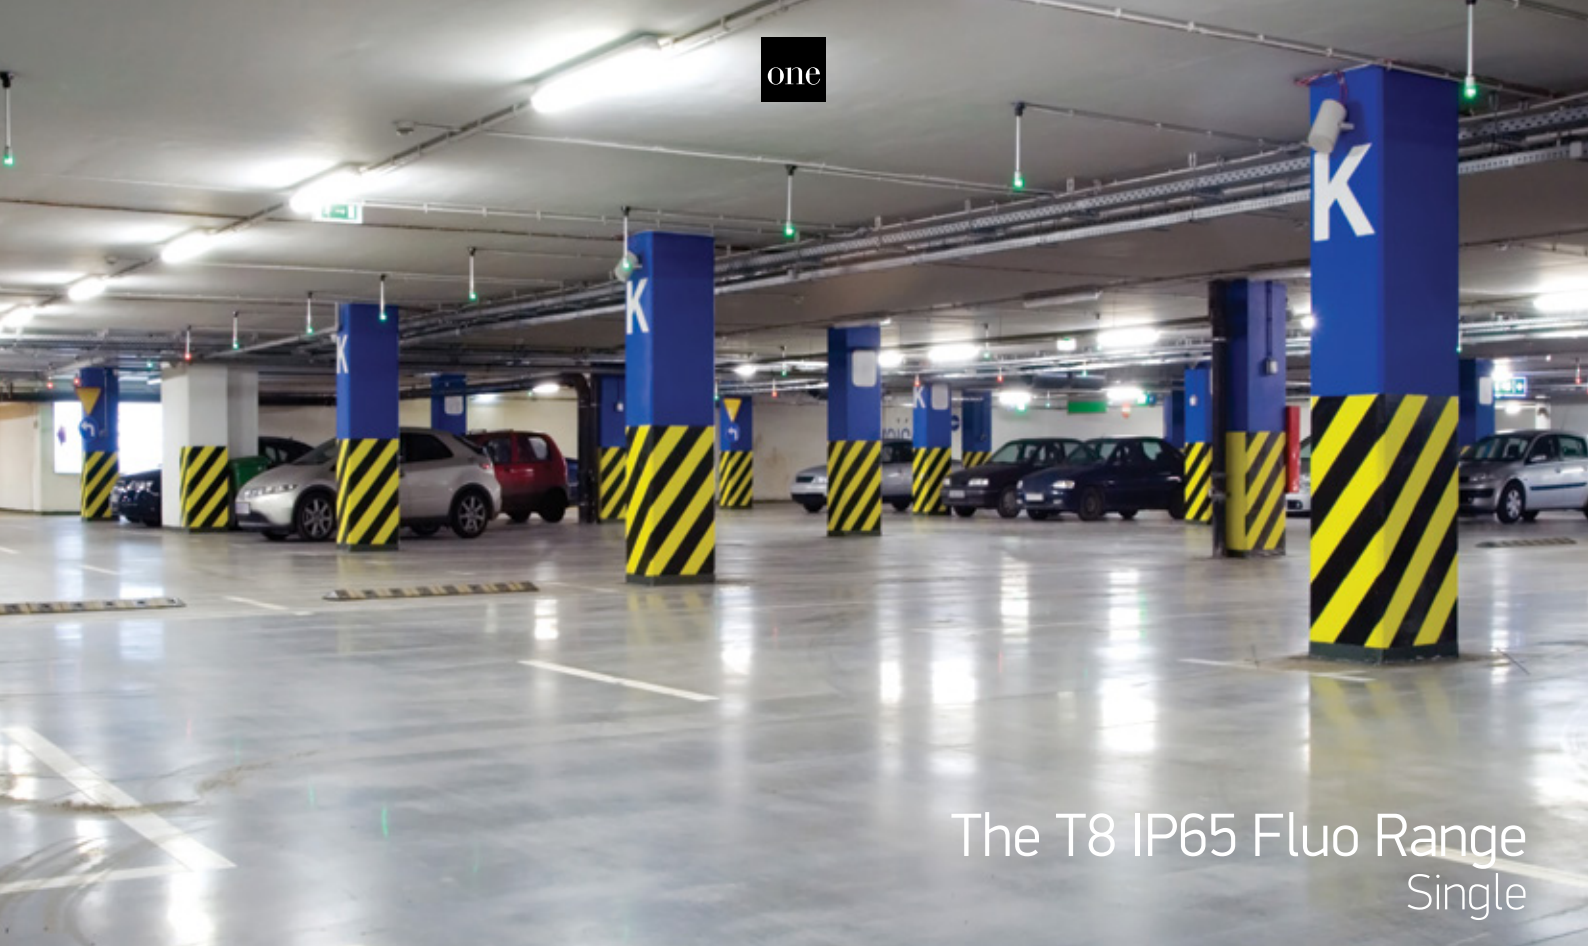


## The T8 IP65 Fluo Range Single



**38118E** | T8 LED 60cm | PC + PC




IP65

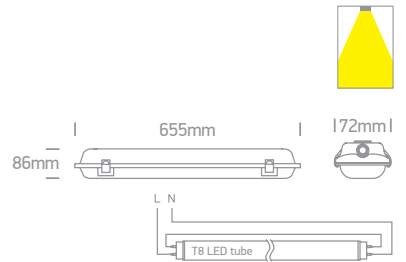

**38136E** | T8 LED 120cm | PC + PC




IP65

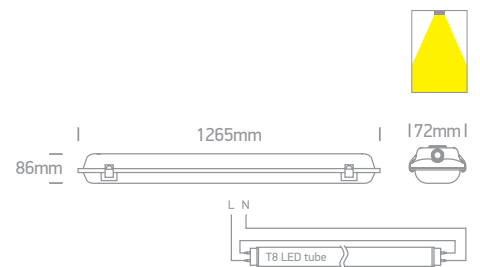

**38158E** | T8 LED 150cm | PC + PC



IP65

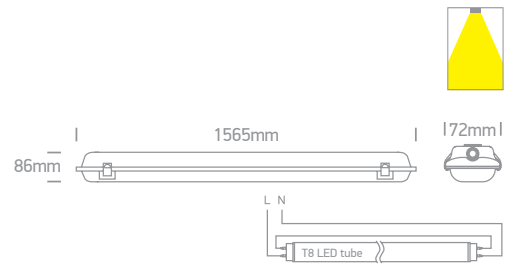

Order Code	Colour	Input	Class		Notes
38118E	Grey	100-240V		15	Only suitable for T8 LED tubes
38136E	Grey	100-240V		9	Only suitable for T8 LED tubes
38158E	Grey	100-240V		9	Only suitable for T8 LED tubes




## The IP65 Range For T8 LED Tubes Double



**38218E** | 2xT8 LED 60cm | PC + PC




IP65

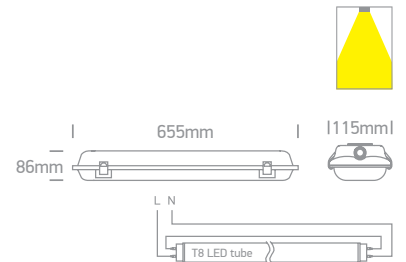

**38236E** | 2xT8 LED 120cm | PC + PC




IP65

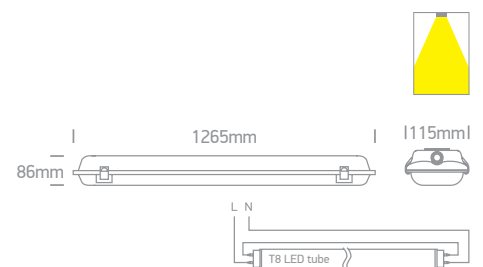

**38258E** | 2xT8 LED 150cm | PC + PC



IP65

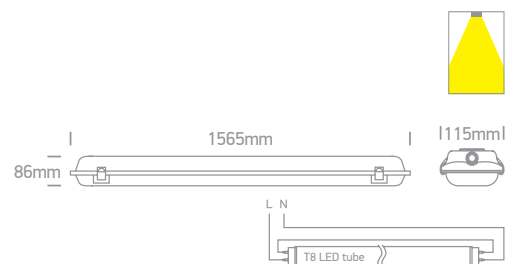

Order Code	Colour	Input	Class	📦	Notes
38218E	Grey	100-240V	⊕	9	Only suitable for T8 LED tubes
38236E	Grey	100-240V	⊕	6	Only suitable for T8 LED tubes
38258E	Grey	100-240V	⊕	6	Only suitable for T8 LED tubes



38236M/C

# The High Power IP65 LED Range

## Single

38136ME/C




**38118M** | 15W | SMD 2835 | PC + opal PC diffuser

IP65



Stainless steel clips.

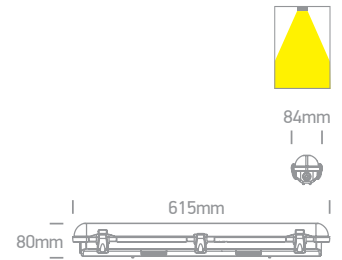

**38136ME** | 30W | SMD 2835 | Emergency 3Hrs Maintained | PC + opal PC diffuser

IP65



Stainless steel clips.




**38158M** | 40W | SMD 2835 | PC + opal PC diffuser

IP65



Stainless steel clips.

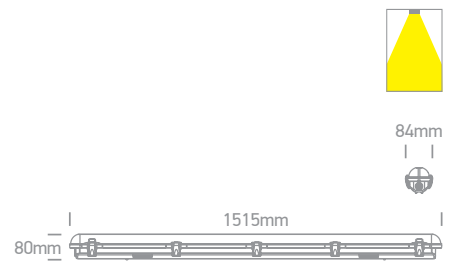

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Battery Duration		Notes
38118M/C	Grey	Cool white	4000K	15W	1500lm	230V		-	12	Complete with 350mA driver
38136ME/C	Grey	Cool white	4000K	30W	3000lm	230V		3Hrs	9	Supplied with battery
38158M/C	Grey	Cool white	4000K	40W	4000lm	230V		-	9	Complete with 700mA driver




# The High Power IP65 LED Range Double




**38236M** | 60W | SMD 2835 | PC + opal PC diffuser





**LED BUILT IN**  
**80 CRI**  

  
**3 YEAR**

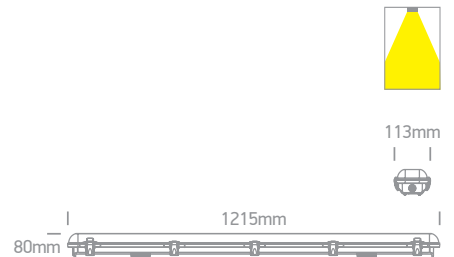**IP65**



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class		Notes
38236M/C	Grey	Cool white	4000K	60W	6000lm	230V		6	Complete with 1050mA driver / Stainless steel clips



38136LC/C

38118LC/C


# The IP65 LED Connectable Range

## Single




**38118LC** | 18W | SMD 2835 | Connectable | PC

Supermarket linear range.



IP65

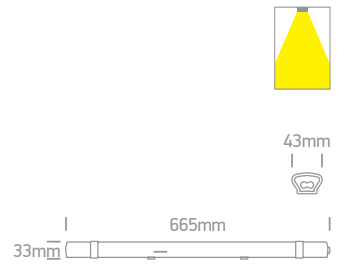

**38136LC** | 36W | SMD 2835 | Connectable | PC

Supermarket linear range.



IP65





**38145LC** | 45W | SMD 2835 | Connectable | PC

Supermarket linear range.



IP65

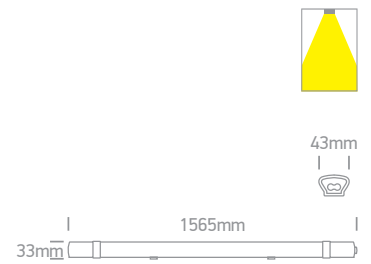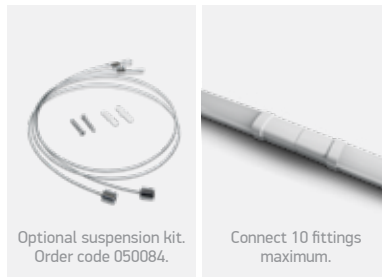

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38118LC/C	White	Cool white	4000K	18W	1550lm	100-240V		50cm	20	Complete with driver
38118LC/W	White	Warm white	3000K	18W	1500lm	100-240V		50cm	20	Complete with driver
38136LC/C	White	Cool white	4000K	36W	3100lm	100-240V		50cm	20	Complete with driver
38136LC/W	White	Warm white	3000K	36W	3000lm	100-240V		50cm	20	Complete with driver
38145LC/C	White	Cool white	4000K	45W	4000lm	100-240V		50cm	20	Complete with driver



# The IP65 LED Connectable Range

## Double




**38236LC** | 36W | SMD 2835 | Connectable | PC

Supermarket linear range.



Optional suspension kit.  
Order code 050084.



Connect 10 fittings  
maximum.



79mm



**38245LC** | 45W | SMD 2835 | Connectable | PC

Supermarket linear range.



Optional suspension kit.  
Order code 050084.



Connect 10 fittings  
maximum.



79mm



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38236LC/D	White	Daylight	6000K	36W	3100lm	100-240V		50cm	10	Complete with driver
38236LC/C	White	Cool white	4000K	36W	3100lm	100-240V		50cm	10	Complete with driver
38245LC/D	White	Daylight	6000K	45W	4000lm	100-240V		50cm	10	Complete with driver
38245LC/C	White	Cool white	4000K	45W	4000lm	100-240V		50cm	10	Complete with driver




# The IP65 LED Slim Range

PC



**38118LA** | 18W | SMD 2835 | PC



IP65




Optional suspension kit.  
Order code 050084.




Complete with 2pcs  
fixing clips.



55mm

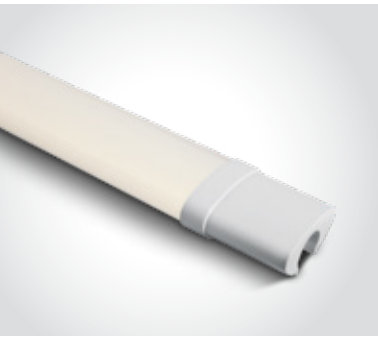

**38136LA** | 36W | SMD 2835 | PC



IP65



Optional suspension kit.  
Order code 050084.




Complete with 3pcs  
fixing clips.



55mm



**38145LA** | 45W | SMD 2835 | PC



IP65



Optional suspension kit.  
Order code 050084.



Complete with 4pcs  
fixing clips.



55mm




Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
38118LA/D	White	Daylight	6000K	18W	1600lm	100-240V		50cm	20	Complete with driver
38118LA/C	White	Cool white	4000K	18W	1600lm	100-240V		50cm	20	Complete with driver
38136LA/D	White	Daylight	6000K	36W	3200lm	100-240V		50cm	20	Complete with driver
38136LA/C	White	Cool white	4000K	36W	3200lm	100-240V		50cm	20	Complete with driver
38145LA/D	White	Daylight	6000K	45W	4100lm	100-240V		50cm	20	Complete with driver
38145LA/C	White	Cool white	4000K	45W	4100lm	100-240V		50cm	20	Complete with driver


# The IP66 Industrial LED Range




**38115LB** | 15W | SMD 2835 | PC



IP66




Complete with 2pcs fixing clips.

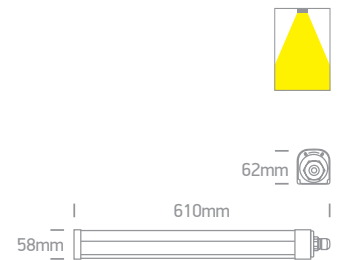



**38130LB** | 30W | SMD 2835 | PC



IP66




Complete with 3pcs fixing clips.

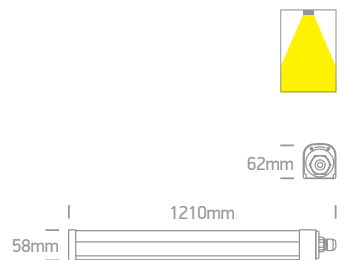


**38150LB** | 50W | SMD 2835 | PC



IP66



Complete with 3pcs fixing clips.

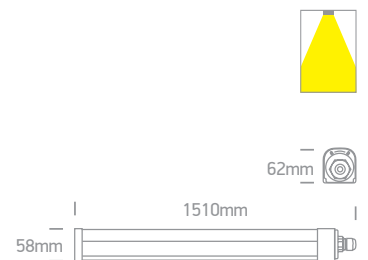

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Box	Notes
38115LB/C	White	Cool white	4000K	15W	1725lm	230V	□	15	Complete with 140mA driver
38130LB/C	White	Cool white	4000K	30W	3450lm	230V	□	12	Complete with 230mA driver
38150LB/C	White	Cool white	4000K	50W	5750lm	230V	□	9	Complete with 300mA driver




## The Supermarket LED Linear Range

### Aluminium




38280 | 80W | SMD 3030 & SMD 2835 | Aluminium


Can be connected in line.




IP20




LED  
BUILT IN




90  
CRI  
ADJUSTABLE




CE




3  
YEAR




Complete with  
2 Fixing clips  
& 2 connectors.




Complete with  
3m suspension kit.



Adjustable sides  
50mm





1200mm  
140mm

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	Notes
38280/W/C	White	Cool white	4000K	80W	7400lm	230V	⊕	Complete with 600mA & 1500mA drivers

one




# The Industrial IP65 AC LED UFO Aluminium



**63100NA** | 100W | SMD 2835 | AC LED | Aluminium

LED BUILT IN  
80 CRI  
CE  
2 YEAR

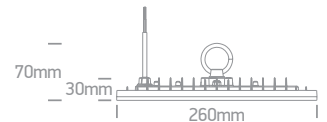


IP65



**63150NA** | 150W | SMD 2835 | AC LED | Aluminium

LED BUILT IN  
80 CRI  
CE  
2 YEAR

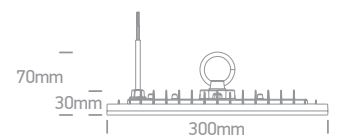


IP65



**63200NA** | 200W | SMD 2835 | AC LED | Aluminium

LED BUILT IN  
80 CRI  
CE  
2 YEAR

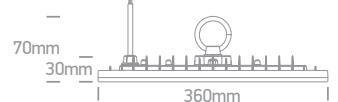

IP65

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	📦	Notes
63100NA/C	Black	Cool white	4000K	100W	10000lm	90°	230V	⚡	150cm	10	AC LED
63150NA/C	Black	Cool white	4000K	150W	15000lm	90°	230V	⚡	150cm	10	AC LED
63200NA/C	Black	Cool white	4000K	200W	20000lm	90°	230V	⚡	150cm	10	AC LED

one



63150N/C



63150N/C + 050114HA

# The Industrial IP65 LED UFO Range

## Aluminium




**63100N** | 100W | SMD 2835 | Dimmable | Aluminium

**LED BUILT IN**  
**80 CRI**

 1-10V DIMMABLE  
**5 YEAR**

IP65

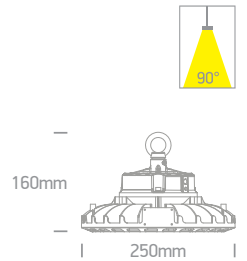


**63150N** | 150W | SMD 2835 | Dimmable | Aluminium

**LED BUILT IN**  
**80 CRI**

 1-10V DIMMABLE  
**5 YEAR**

IP65

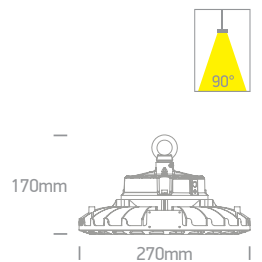

**050114HA** | Reflector for 63100N & 63150N | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63100N/C	Black	Cool white	4000K	100W	13000lm	90°	230V		150cm	1	Complete with 400mA dimmable driver
63150N/C	Black	Cool white	4000K	150W	19500lm	90°	230V		150cm	1	Complete with 620mA dimmable driver

# The Industrial IP65 LED UFO Range

## Aluminium





63200N/C + 050114GB

**63200N** | 200W | SMD 2835 | Dimmable | Aluminium




IP65

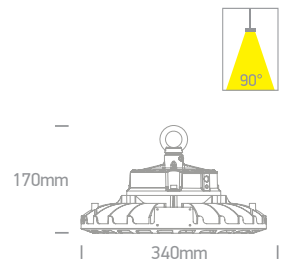

**050114GB** | Diffuser for 63200N | PC



**050114HB** | Reflector for 63200N | Aluminium

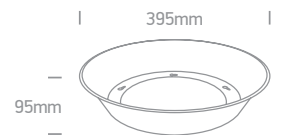

**050114FA** | Reflector for 63200N | Aluminium



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	📦	Notes
63200N/C	Black	Cool white	4000K	200W	26000lm	90°	230V	⊕	150cm	1	Complete with 800mA dimmable driver



# The Industrial IP65 UFO Range


DALI



**63150NL** | 150W | SMD 2835 | DALI | Aluminium + PC

**LED BUILT IN**
  
**80 CRI**
  
  
**5 YEAR**


new  
IP65

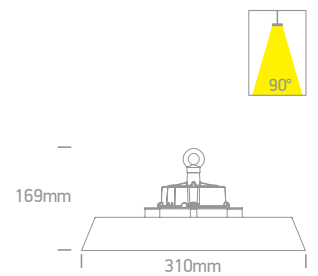

**63240NL** | 240W | SMD 2835 | DALI | Aluminium + PC

**LED BUILT IN**
  
**80 CRI**
  
  
**5 YEAR**

new  
IP65

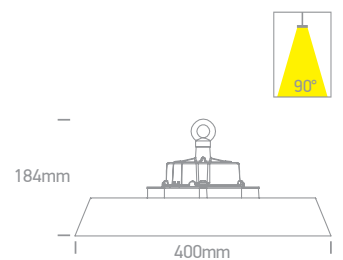

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
63150NL/C	Black	Cool white	4000K	150W	22500lm	90°	230V		150cm	1	Complete with DALI 2 driver
63240NL/C	Black	Cool white	4000K	240W	36000lm	90°	230V		150cm	1	Complete with DALI 2 driver

one



63200N/V



63100N/V


# The Industrial IP65 UFO Range

CCT V & PV




**63100N** | 60W / 80W / 100W | SMD 2835 | Aluminium + PC

new  
IP65

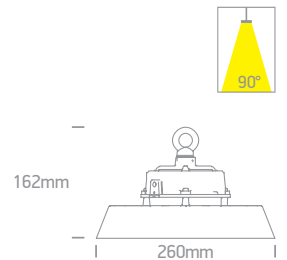


**63150N** | 90W / 120W / 150W | SMD 2835 | Aluminium + PC

new  
IP65

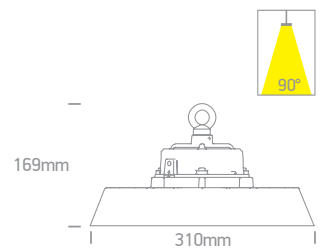

**63200N** | 120W / 160W / 200W | SMD 2835 | Aluminium + PC

new  
IP65

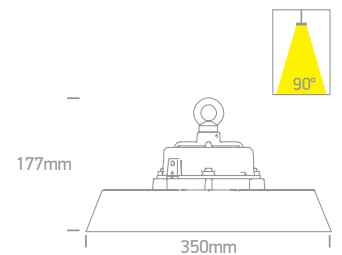

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	📦	Notes
63100N/V	Black	CCT V	4000K-4700K-5700K	60W-80W-100W	15000lm@100W	90°	230V	⊕	150cm	1	Complete with driver
63150N/V	Black	CCT V	4000K-4700K-5700K	90W-120W-150W	22500lm@150W	90°	230V	⊕	150cm	1	Complete with driver
63200N/V	Black	CCT V	4000K-4700K-5700K	120W-160W-200W	30000lm@200W	90°	230V	⊕	150cm	1	Complete with driver






# The Floodlights




**7020** | 150W | Rx7s 76mm | Die cast




**IP54**  
**offer**

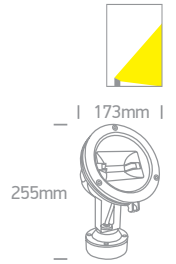


**7030** | 8x1W | LED | Die cast




**IP54**  
**offer**

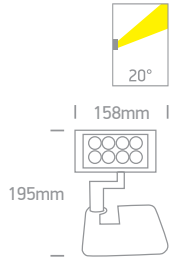


**7022** | 15x1W | LED | Die cast




**IP65**  
**offer**

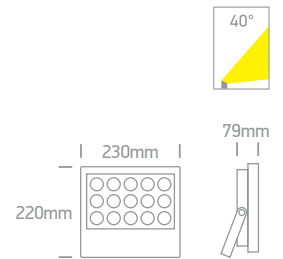

**7040** | 30W | COB LED | Die cast



**IP65**  
**offer**

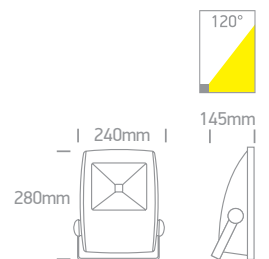


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⚡	📦	Notes
7020/G/5	Grey	-	-	150W	-	-	230V	⊕	-	8	-
7030/AN/C	Anthracite	Cool white	4000K	8x1W	600lm	20°	230V	⊕	-	12	Complete with driver
7022/G/D	Grey	Daylight	6000K	15x1W	1125lm	40°	100-240V	⊕	200cm	4	Complete with driver
7040/G/D	Grey	Daylight	6000K	30W	2100lm	120°	100-240V	⊕	100cm	5	Complete with driver



## The COB LED Slim Floodlights




7028A | 10W | COB LED | Die cast



IP65  
offer

LED BUILT IN  
70 CRI  
3 YEAR

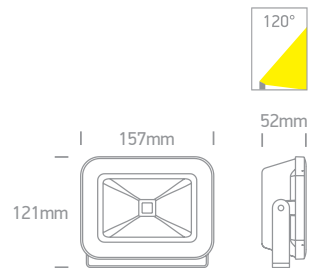

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7028A/AN/C	Anthracite	Cool white	4000K	10W	700lm	120°	100-240V		100cm	20	Complete with driver
7028A/AN/W	Anthracite	Warm white	3000K	10W	700lm	120°	100-240V		100cm	30	Complete with driver




# AC LED Floodlights


## 30-50W




**7028CB** | 30W | SMD 2835 | Die cast + tempered glass




IP65

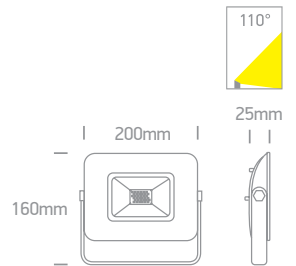

**7028CC** | 50W | SMD 2835 | Die cast + tempered glass



IP65

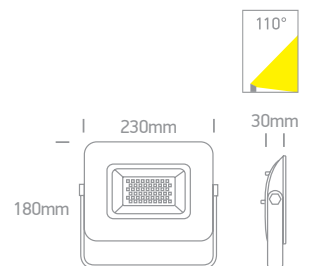

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
<b>7028CB/B/C</b>	Black	Cool white	4000K	30W	2700lm	110°	230V		30cm	20	AC LED
<b>7028CC/B/C</b>	Black	Cool white	4000K	50W	4500lm	110°	230V		30cm	10	AC LED



# AC LED Floodlights


## 100-250W



**7028CD** | 100W | SMD 2835 | Die cast + tempered glass

**LED BUILT IN**
  
**80 CRI**
  
**ADJUSTABLE**
  
**CE**
  
**2 YEAR**


IP65

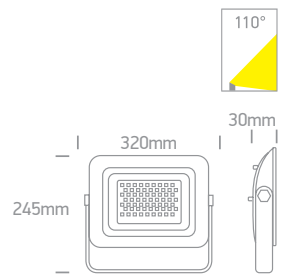

**7028CE** | 150W | SMD 2835 | Die cast + tempered glass

**LED BUILT IN**
  
**80 CRI**
  
**ADJUSTABLE**
  
**CE**
  
**2 YEAR**

IP65

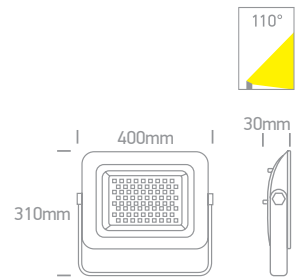

7028CF/B/D


**7028CF** | 250W | SMD 2835 | Die cast + tempered glass

**LED BUILT IN**
  
**80 CRI**
  
**ADJUSTABLE**
  
**CE**
  
**2 YEAR**

IP65



7028CF/B/C

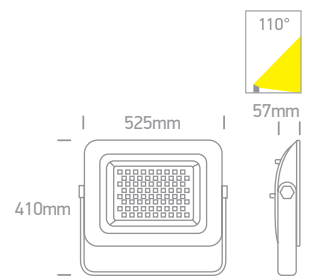

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
7028CD/B/C	Black	Cool white	4000K	100W	9000lm	110°	230V		30cm	5	AC LED
7028CE/B/C	Black	Cool white	4000K	150W	13500lm	110°	230V		30cm	4	AC LED
7028CF/B/C	Black	Cool white	4000K	250W	22500lm	110°	230V		30cm	2	AC LED
7028CF/B/D	Black	Daylight	6000K	250W	22500lm	110°	230V		30cm	4	AC LED

# The Glass Face AC LED Floodlights



7028AG/B/C



7028AG/W/C

7028AG | 10W | SMD 3030 | Die cast + tempered glass



LED BUILT IN 80 CRI ADJUSTABLE

IP65 offer

CE 2 YEAR



7028AG/B/C


7028AG | 10W | SMD 3030 | Die cast + tempered glass



LED BUILT IN 80 CRI ADJUSTABLE

IP65 offer

CE 2 YEAR

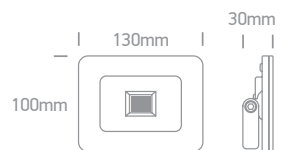

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⏏	📦	Notes
7028AG/W/C	White	Cool white	4000K	10W	800lm	100°	230V	⊕	50cm	20	AC LED
7028AG/B/C	Black	Cool white	4000K	10W	800lm	100°	230V	⊕	50cm	20	AC LED



# Street Lighting




**70114** | 50W | 64xSMD 2835 | Plastic + Glass

LED BUILT IN 80 CRI  
IK08 CE 5 YEAR



Optional 90° adaptor.  
Order code 050326.

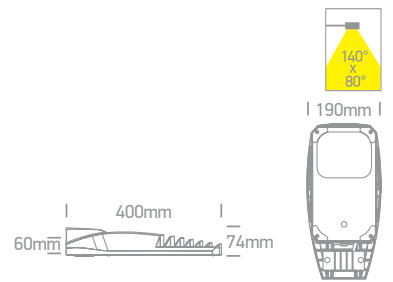

IP66




**70116B** | 75W | 96xSMD 3030 | Aluminium + glass

LED BUILT IN 80 CRI  
IK08 CE 5 YEAR



Optional 90° adaptor.  
Order code 050326.

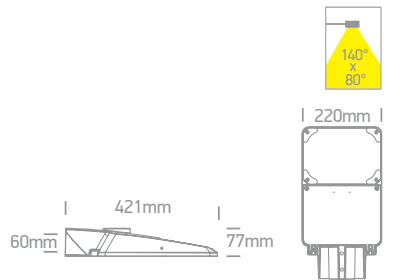

IP66




**70116C** | 120W | 126xSMD 3030 | Aluminium + glass

LED BUILT IN 80 CRI  
IK08 CE 5 YEAR



Optional 90° adaptor.  
Order code 050326.

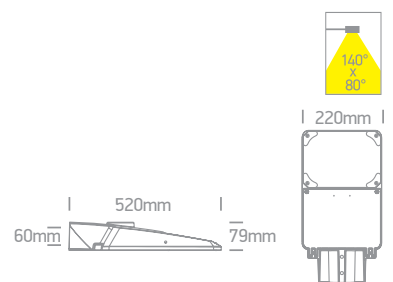

IP66

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⊕	📦	Notes
70114/B/C	Black	Cool white	4000K	50W	6800lm	140°x80°	100-240V	⊕	500cm	6	Complete with 950mA driver
70114/B/W	Black	Warm white	3000K	50W	6800lm	140°x80°	100-240V	⊕	200cm	6	Complete with 950mA driver
70116B/G/C	Grey	Cool white	4000K	75W	10500lm	140°x80°	100-240V	⊕	200cm	1	Complete with 968mA driver
70116C/G/C	Grey	Cool white	4000K	120W	16800lm	140°x80°	100-240V	⊕	200cm	1	Complete with 1020mA driver



# The LED Wall Washers

## RGB



7055B/RGB | 24x1,5W | LED | RGB | Aluminium

Connect maximum 5pcs.




IP66

CE 5 YEAR



89100LP  
DALI LED Controller 4 channel.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	Ⓢ	📦	Notes
7055B/RGB	Grey	RGB	-	24x1,5W	-	30°	24V DC	Ⓢ	100cm	12	Requires 24V DC driver





# The LED Wall Washers Single Colour





**7055A** | 12x1W | LED | Aluminium

Connect maximum 10pcs.

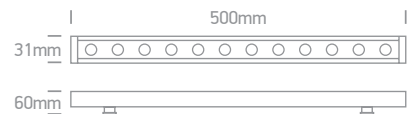

**7055B** | 24x1W | LED | Aluminium

Connect maximum 5pcs.



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
<b>7055A/C</b>	Grey	Cool white	4000K	12x1W	850lm	60°x20°	24V DC		100cm	12	Requires 24V DC driver
<b>7055A/W</b>	Grey	Warm white	3000K	12x1W	850lm	60°x20°	24V DC		100cm	12	Requires 24V DC driver
<b>7055B/C</b>	Grey	Cool white	4000K	24x1W	1700lm	60°x20°	24V DC		100cm	12	Requires 24V DC driver
<b>7055B/W</b>	Grey	Warm white	3000K	24x1W	1700lm	60°x20°	24V DC		100cm	12	Requires 24V DC driver






## The LED High Power Box Aluminium




**7058A** | 36W / 60W / 90W / 120W | SMD 2835 | Surface mounted | Aluminium

IP65

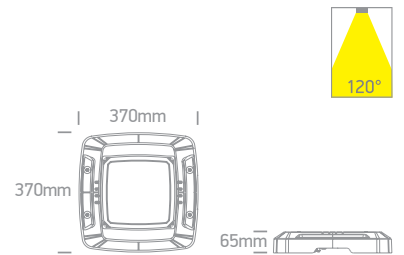

**7058** | 120W | SMD 3030 | Surface mounted | Aluminium

IP65

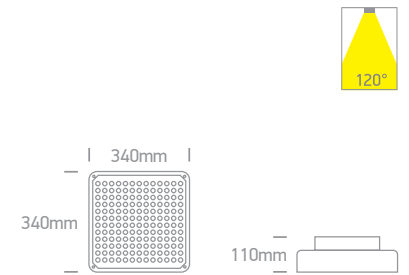


Ideal for petrol stations, showrooms & warehouses.



**7058R** | 120W | SMD 3030 | Recessed mounted | Aluminium

IP65

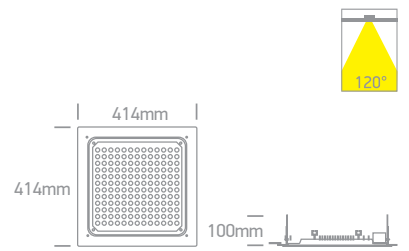

Ideal for petrol stations, showrooms & warehouses.

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class	⊥	↕	📦	Notes
<b>7058A/W/V</b>	White	CCT V	3000K-4000K-5000K	36W-60W-90W-120W	18000lm@120W	120°	230V	⊕	-	-	1	Complete with PV driver
<b>7058/W/D</b>	White	Daylight	6000K	120W	10800lm	120°	100-240V	⊕	-	-	1	Complete with driver
<b>7058R/W/C</b>	White	Cool white	4000K	120W	10200lm	120°	100-240V	⊕	380x380mm	130mm	1	Complete with driver

one


# The Industrial LED Lights Die cast



7056A | 50W | SMD LED | Die cast

LED BUILT IN  
80 CRI  
CE  
3 YEAR

IP65

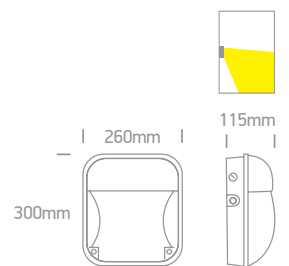



Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class	⊞	Notes
7056A/C	Black	Cool white	4000K	50W	4250lm	230V	⊞	6	Complete with driver




# The LED Park Light Die cast





70112 | 75W | LED | Die cast






**LED**  
BUILT IN











450mm

530mm




60mm opening





70112 | 75W PV | LED | Die cast







**LED**  
BUILT IN



















450mm

530mm

60mm opening


Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Input	Class			Notes
70112/B/C	Black	Cool white	4000K	75W	9000lm	100-240V		150cm	1	Complete with 1730mA driver
70112/B/W	Black	Warm white	3000K	75W	9000lm	100-240V		150cm	1	Complete with 1730mA driver
70112/B/V	Black	CCT V	2700K-3300K-4000K	25W-40W-60W-75W	8250lm@75W	120-240V		150cm	1	Complete with PV driver



## The LED Park Lantern Die cast





70110 | 60W | LED | Die cast

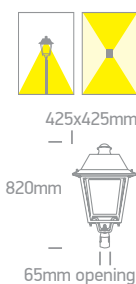

IP66<sup>°</sup>



70105 | 50W | COB LED | Die cast

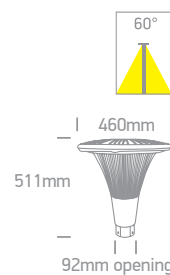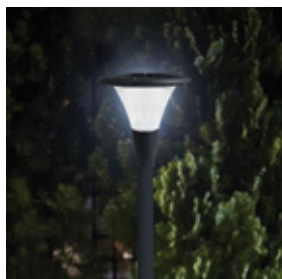

IP65<sup>°</sup>

Order Code	Colour	Light Colour	CCT (K)	Watts	Lumen (lm)	Beam Angle	Input	Class			Notes
70110/AN/C	Anthracite	Cool white	4000K	60W	4500lm	Assymetric	100-240V		100cm	1	Complete with driver
70105/AN/C	Anthracite	Cool white	4000K	50W	4000lm	60°	100-240V		500cm	1	Complete with driver