

02 Recessed Spots Fixed LED>The COB IP54 Range

10107M/W/W



7W COB LED recessed spot with IP54.

Complete with 300mA driver.

Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions



Gallery

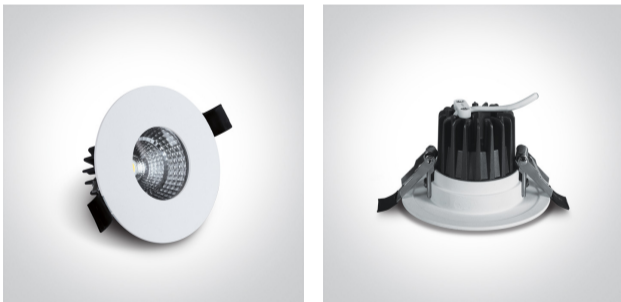




Physical Specification

Item Group	02 Recessed Spots Fixed LED
Family	The COB IP54 Range
Order Code	10107M/W/W
Colour	White
Material	Die Cast
Shape	Circular
Height	62mm

Diameter	95mm
Cutout Hole Diameter	68mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Outdoor	Yes
Adjustable	No


Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	7W
IP Rating	IP54
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	300mA
Voltage	20,4V
Safety Class	
Power(Watts)	6,12W
IP Rating	IP54
Light Source	LED built in
LED Type	COB

LED Brand	Bridgelux
LED Number	1
F Mark	

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	4,2-7,2W
Power Factor	0,8
Constant Current	Yes
300mA	14-24V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Lifud
Protection	0

Illumination Data

Colour Temperature	3000K
Lumen Output	490lm
Light Efficiency	70lm/W
CRI	90
Beam Angle	40°
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Weight

0.262kg

Pcs/Carton

50

Barcode

5291889071020

HS Code

9405413990

Certification & Warranty

Warranty

3 years

switch to
one light!

one
LIGHT

