

discontinue>discontinueitems

10112TD/B/C



12W Recessed Dark Light LED spot with removable head, IP20.

Complete with 300mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

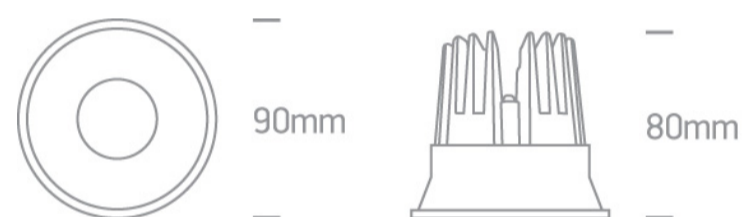

Physical Specification

Item Group	discontinue
Family	discontinueitems
Order Code	10112TD/B/C
Colour	Black
Material	Die Cast
Shape	Circular
Height	80mm
Diameter	90mm
Cutout Hole Diameter	82mm
Recessed Ceiling	Yes
Depth Required	100mm
Indoor	Yes

Adjustable

No

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

12W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

300mA

Voltage

36V

Safety Class



Power(Watts)

10,8W

IP Rating

IP20

Light Source

LED built in

LED Type

COB

LED Brand

Bridgelux

Gear

Gear Type


Led Driver

Input Voltage


220-240V

50 Hz

Yes

60 Hz	Yes
Power(Watts)	8,1-12,6W
Power Factor	0,6
Constant Current	Yes
300mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	Lifud

Illumination Data

Colour Temperature	4000K
Lumen Output	960lm
Light Efficiency	80lm/W
CRI	90
Beam Angle	20°
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Length	11,5cm
Box Width	10cm
Box Height	11cm
Box Weight	0.392kg
Pcs/Carton	50
Barcode	5291889061540
HS Code	9405413990

Certification & Warranty

switch to
one light!

one
LIGHT

