

06 Downlights Fixed LED>The 18-30W Round Recessed Panels CCT V

10118FA/W/V



CCT Variable 18W slim downlight LED, IP20, ideal for commercial applications such as offices, galleries and showrooms.

Supplied with 450mA non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions

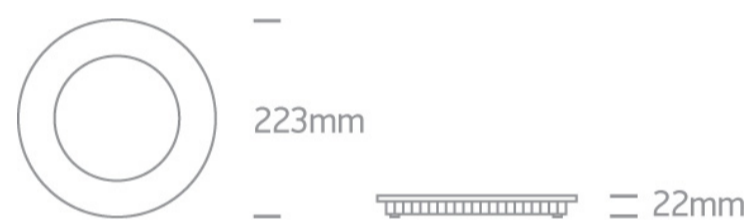

Gallery

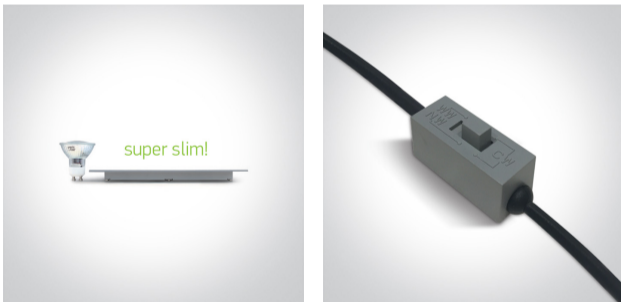

Related items



89024UT

Physical Specification

Item Group



06 Downlights Fixed LED


Family

The 18-30W Round Recessed Panels CCT V

Order Code	10118FA/W/V
Colour	White
Material	Die Cast
Diffuser Material	Acrylic
Shape	Circular
Height	22mm
Diameter	223mm
Cutout Hole Diameter	210mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	18W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	450mA
Safety Class	

IP Rating
Light Source
LED Type
LED Brand
LED Number

IP40
LED built in
SMD 2835
Epistar
144


Gear

Gear Type
Input Voltage
50 Hz
60 Hz
Power(Watts)
Power Factor
Constant Current
450mA
IP Rating
Safety Class
Dimmable
Ambient Temp
Operating Temp
Housing Material
Brand

Led Driver
220-240V
Yes
Yes
11,25-18W
0,9
Yes
25-40V
IP20

No
50°C
75°C
Plastic
Lifud

Illumination Data

Colour Temperature
Lumen Output
Light Efficiency
CRI
Beam Angle
Illumination Diagram

3000K-4000K-5700K
1800lm
100lm/W
80
120°


Packing Info

Pcs/Carton

16

Barcode

5291889078937

HS Code

9405119090

Certification & Warranty

Warranty

3 years

Weee Directive

Yes

switch to
one light!

one
LIGHT

