

## 06 Downlights Fixed LED > UGR19 Adjustable CCT Range

## 10120UV/W



20W SMD LED UGR19 downlight with adjustable CCT, IP44.

Complete with Non-flickering 500mA driver.


Complies with standard EN60598-1 and any other specific standards.




### Downloads



### Dimensions

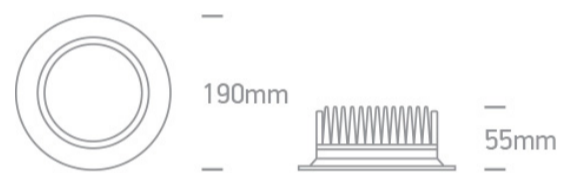

### Gallery

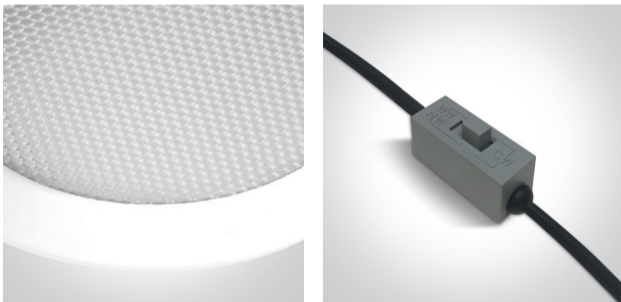




### Physical Specification

Item Group	06 Downlights Fixed LED
Family	UGR19 Adjustable CCT Range
Order Code	10120UV/W
Colour	White
Material	Die Cast
Shape	Circular
Height	55mm

Diameter	190mm
Cutout Hole Diameter	170mm
Recessed Ceiling	Yes
Depth Required	75mm
Indoor	Yes
Adjustable	No

## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	20W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	36V
Safety Class	
Power(Watts)	19,8W
IP Rating	IP44
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar

## Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

13,75-22W

Power Factor

0,9

Constant Current

Yes

500mA

25-40V

IP Rating

IP44

Safety Class



Dimmable

No

Housing Material

Plastic

Output Terminal

Cable

Brand

Lifud

Protection

Short Circuit and Overload

## Illumination Data

Colour Temperature

3000K-4000K-6000K

Lumen Output

1500lm

Light Efficiency

75lm/W

CRI

80

Illumination Diagram



UGR

19

## Packing Info

Box Weight

0.615kg

Pcs/Carton

20

Barcode

5291889065319

HS Code

9405413990

## Certification & Warranty

Warranty

3 years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

