

06 Downlights Fixed LED>Round Downlights

10120/W



20W LED recessed downlight with interchangeable rings, IP44.
Ideal for general lighting applications.

Rings must be order separately.

Complete with 500mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

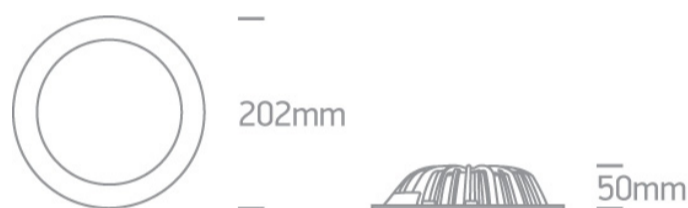


Gallery




Must be ordered separately



10100/AL



10100/G





10100/W

Physical Specification



| | |
|----------------------|-------------------------|
| Item Group | 06 Downlights Fixed LED |
| Family | Round Downlights |
| Order Code | 10120/W |
| Material | Aluminium |
| Shape | Circular |
| Height | 50mm |
| Diameter | 202mm |
| Cutout Hole Diameter | 180mm |
| Recessed Ceiling | Yes |
| Depth Required | 70mm |
| Indoor | Yes |
| Adjustable | No |

Electrical Characteristics


| | |
|------------------|---|
| Gear | External-Included |
| Fitting + Driver | |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Safety Class |  |
| Power(Watts) | 20W |
| IP Rating | IP44 |
| Light Source | LED built in |
| Dimmable | No |
| F Mark |  |

Fitting

| | |
|---------------|------------------|
| Input Type | Constant Current |
| Input Current | 500mA |

| | |
|--------------|---|
| Voltage | 38V |
| Safety Class |  |
| Power(Watts) | 19W |
| IP Rating | IP44 |
| Light Source | LED built in |
| LED Brand | Epistar |
| F Mark |  |

Gear

| | |
|------------------|---|
| Gear Type | Led Driver |
| Input Voltage | 220-240V |
| 50 Hz | Yes |
| 60 Hz | Yes |
| Power(Watts) | 13,5-21W |
| Power Factor | 0,9 |
| Constant Current | Yes |
| 500mA | 27-42V |
| IP Rating | IP20 |
| Safety Class |  |
| Dimmable | No |
| Ambient Temp | 45°C |
| Operating Temp | 85°C |
| Housing Material | Plastic |
| Output Terminal | Cable |
| Brand | Lifud |

Illumination Data

| | |
|--------------------|--------|
| Colour Temperature | 3000K |
| Lumen Output | 1800lm |
| Light Efficiency | 90lm/W |
| CRI | 75 |

Beam Angle

110°

Illumination Diagram



Packing Info

Box Length

23,5cm

Box Width

7,5cm

Box Height

21,5cm

Box Weight

1,03Kg

Pcs/Carton

10

Barcode

5291889032120

HS Code

9405409900

Certification & Warranty

Warranty

2 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

