




## **Product Datasheet**

06 Downlights Fixed LED>The Chrome Bezel Range Aluminium

10124/G/W

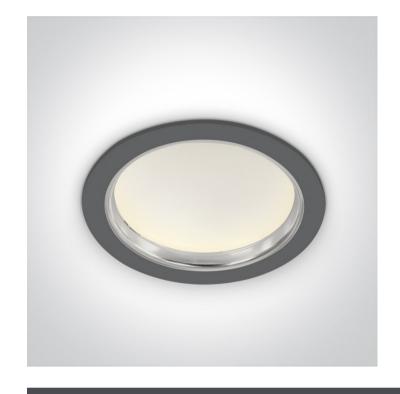

24W SMD LED recessed downlight, chrome bezel range, IP44.

Complete with 600mA driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads









Dimensions



238mm



125mm

## **Physical Specification**

06 Downlights Fixed LED
The Chrome Bezel Range Aluminium
10124/G/W
Grey
Aluminium
Circular
125mm
238mm
210mm
Yes
160mm
Yes

## Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	24W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	600mA
Voltage	36V
Power(Watts)	21,6W
IP Rating	IP44
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan
LED Number	48
F Mark	F
Gear	
Gear Type	Led Driver
Input Voltage	220-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	18-24W
Power Factor	0,9
Constant Current	Yes
600mA	30-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	50°
Operating Temp	80°
Housing Material	Plastic
Output Terminal	Cable
Brand	Kegu
Illumination Data	
Illumination Data	
Illumination Data  Colour Temperature	3000K
	3000K 1450lm
Colour Temperature	
Colour Temperature  Lumen Output	1450lm
Colour Temperature  Lumen Output  Light Efficiency	1450lm 60,41lm/W
Colour Temperature  Lumen Output  Light Efficiency  CRI	1450lm 60,41lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle	1450lm 60,41lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	1450lm 60,41lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	1450lm 60,41lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	1450lm 60,41lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	1450lm 60,41lm/W 80 120°
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Packing Info  Box Length	1450lm 60,41lm/VV 80 120°
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Packing Info  Box Length  Box Width	1450lm 60,41lm/W 80 120°  24,5cm
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Packing Info  Box Length  Box Width  Box Height	1450lm 60,41lm/W 80 120°  24,5cm 24,5cm 12,5cm
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Packing Info  Box Length  Box Width  Box Height  Box Weight	1450lm 60,41lm/W 80 120°  24,5cm 24,5cm 12,5cm 0,760kg

## Certification & Warranty

Warranty 2 Years

Weee Directive Yes



