

08 Downlights Adjustable LED>The COB Pop Out Range

11115RA/W/C



15W COB LED recessed adjustable spot, for general lighting applications.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Physical Specification

Item Group	08 Downlights Adjustable LED
Family	The COB Pop Out Range
Order Code	11115RA/W/C
Colour	White
Material	Die Cast
Shape	Circular
Height	90mm
Diameter	105mm
Cutout Hole Diameter	90mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes

Adjustable

2 Directions

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

15W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

500mA

Voltage

27,7V

Safety Class



Power(Watts)

13,35W

IP Rating

IP20

Light Source

LED built in

LED Type

COB

LED Brand

Bridgelux

F Mark




Gear

Gear Type


Led Driver

Input Voltage

220-240V

50 Hz	Yes
60 Hz	Yes
Power(Watts)	9,5-16W
Power Factor	0,9
Constant Current	Yes
500mA	19-32V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	50°C
Operating Temp	80°C
Housing Material	Plastic
Brand	Eaglerise
Protection	Short circuit Protection

Illumination Data

Colour Temperature	4000K
Lumen Output	1100lm
Light Efficiency	73,33lm/W
CRI	80
Beam Angle	36°
Illumination Diagram	
Dark Light	Yes

Packing Info

Box Length	16,5cm
Box Width	12cm
Box Height	12cm
Box Weight	0,560
Pcs/Carton	24


Barcode

5291889047759

HS Code

9405409900

Energy Label

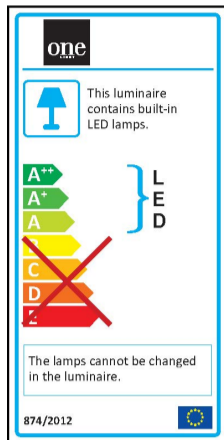

Certification & Warranty

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

