

07 Downlights Adjustable LED>The COB Pop Out Range Aluminium

11118H/G/C



18W COB LED extractable fitting with great flexibility on movement. Ideal for shops.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions



Gallery

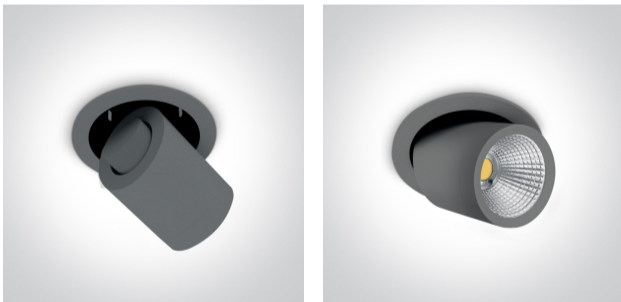




Physical Specification


Item Group	07 Downlights Adjustable LED
Family	The COB Pop Out Range Aluminium
Order Code	11118H/G/C
Colour	Grey
Material	Aluminium
Shape	Circular
Height	126mm

Diameter	137mm
Cutout Hole Diameter	120mm
Recessed Ceiling	Yes
Depth Required	110mm
Indoor	Yes
Adjustable	2 Directions


Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	18W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	35V
Safety Class	
Power(Watts)	17,5W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand	Bridgelux
Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	13-21W
Power Factor	0,9
Constant Current	Yes
500mA	35-45V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	Lifud

Illumination Data

Colour Temperature	4000K
Lumen Output	1300lm
Light Efficiency	72,22lm/W
CRI	80
Beam Angle	35°
Illumination Diagram	

Packing Info

Box Length	18,5cm
Box Width	18,5cm
Box Height	14cm
Box Weight	1,05kg

Pcs/Carton	20
Barcode	5291889032601
HS Code	9405409900

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes

switch to
one light!

one
LIGHT

