

07 Downlights Adjustable LED>Dark Mirror Reflector Range

11120E/W/W



20W COB LED adjustable recessed Spot with dark chrome reflector.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

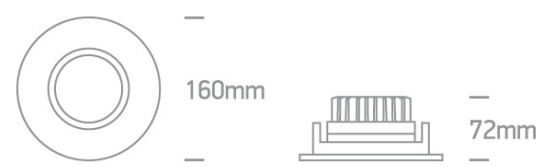

Physical Specification

| | |
|----------------------|------------------------------|
| Item Group | 07 Downlights Adjustable LED |
| Family | Dark Mirror Reflector Range |
| Order Code | 11120E/W/W |
| Colour | White |
| Material | Die Cast |
| Shape | Circular |
| Height | 72mm |
| Diameter | 160mm |
| Cutout Hole Diameter | 140mm |
| Recessed Ceiling | Yes |
| Depth Required | 110mm |
| Indoor | Yes |

Adjustable

1 Direction

Electrical Characteristics

Gear

External-Included

Fitting + Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

20W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

F Mark



Fitting

Input Type

Constant Current

Input Current

500mA

Voltage

36,9V

Safety Class



Power(Watts)

18,45W

IP Rating

IP20

Light Source

LED built in

LED Type

COB

LED Brand

Cree

F Mark




Gear

Gear Type


Led Driver

Input Voltage

220-240V

| | |
|------------------|---|
| 50 Hz | Yes |
| 60 Hz | Yes |
| Power(Watts) | 12,5-20W |
| Power Factor | 0,9 |
| Constant Current | Yes |
| 500mA | 25-40V |
| IP Rating | IP20 |
| Safety Class |  |
| Dimmable | No |
| Housing Material | Plastic |
| Output Terminal | Cable |
| Brand | Lifud |

Illumination Data

| | |
|----------------------|---|
| Colour Temperature | 3000K |
| Lumen Output | 1700lm |
| Light Efficiency | 85lm/W |
| CRI | 80 |
| Beam Angle | 30° |
| Illumination Diagram |  |
| Dark Light | Yes |

Packing Info

| | |
|------------|---------------|
| Pcs/Carton | 20 |
| Barcode | 5291889064213 |
| HS Code | 9405409900 |

Warranty

3 Years

Weee Directive

Yes

switch to
one light!

one
LIGHT

