

07 Downlights Adjustable LED>The COB Retro Downlights Aluminium

11130C/W/C



30W COB LED recessed adjustable spot, for general lighting applications.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

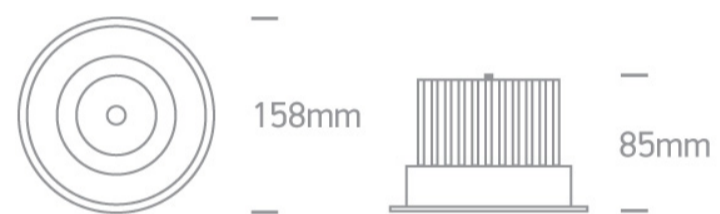

Gallery






Physical Specification


Item Group	07 Downlights Adjustable LED
Family	The COB Retro Downlights Aluminium
Order Code	11130C/W/C
Colour	White
Material	Aluminium
Shape	Circular
Height	85mm

Diameter	158mm
Cutout Hole Diameter	145mm
Recessed Ceiling	Yes
Depth Required	110mm
Indoor	Yes
Adjustable	1 Direction


Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	39V
Safety Class	
Power(Watts)	27,3W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand	Sanan
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	30W
Power Factor	0,9
Constant Current	Yes
700mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	Lifud

Illumination Data

Colour Temperature	4000K
Lumen Output	2200lm
Light Efficiency	73,33lm/W
CRI	80
Beam Angle	38°
Illumination Diagram	

Packing Info

Box Length	18cm
Box Width	18cm
Box Height	11cm
Box Weight	0,94kg

Pcs/Carton	18
Barcode	5291889042266
HS Code	9405409900

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes

switch to
one light!

one
LIGHT

