

07 Downlights Adjustable LED>The COB Shop Downlights Pro Die cast

**11150A/W/C**



50W COB LED Recessed adjustable downlight, shop range, IP20.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



#### Downloads



#### Dimensions

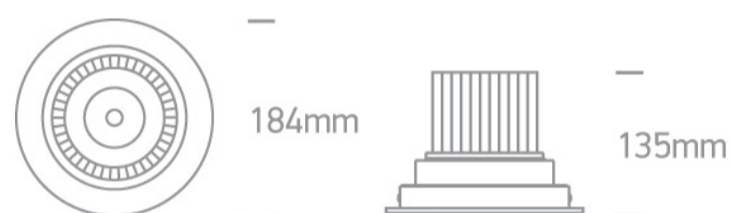

#### Gallery



#### Physical Specification

Item Group

07 Downlights Adjustable LED

Family

The COB Shop Downlights Pro Die cast

Order Code

11150A/W/C

Colour

White

Material

Die Cast

Shape



Circular


Height


135mm

Diameter	184mm
Cutout Hole Diameter	165mm
Recessed Ceiling	Yes
Depth Required	160mm
Indoor	Yes
Adjustable	2 Directions


### Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	50W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	1200mA
Voltage	40V
Safety Class	
Power(Watts)	48W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand	Epistar
Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	32,4-50,4W
Power Factor	0,9
Constant Current	Yes
1200mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	Eaglerise

### Illumination Data

Colour Temperature	4000K
Lumen Output	4450lm
Light Efficiency	89lm/W
CRI	80
Beam Angle	40°
Illumination Diagram	

### Packing Info

Box Length	25cm
Box Width	20cm
Box Height	16cm
Box Weight	1,9kg

Pcs/Carton	8
Barcode	5291889039358
HS Code	9405409900

#### Certification & Warranty

Warranty	2 Years
Weee Directive	Yes

switch to  
**one light!**

one  
LIGHT

