


www.1-light.eu

New 2025 Edition 2>Wall & Ceiling LED

12130D/W/V

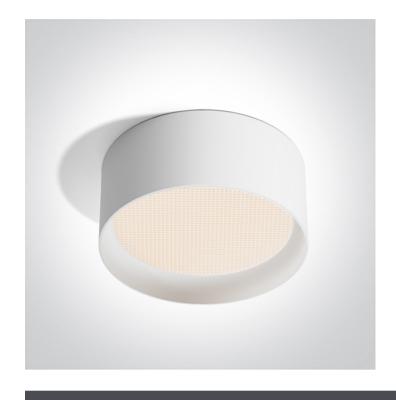

CCT Variable 30W LED surface mounted downlight. IP44.

Supplied with non-dimmable driver.

Complies with standard EN60598-1 and any other specific standards.













Downloads










Dimensions



Gallery



Physical Specification

Item Group		
Family		
Order Code		
Colour		
Material		
Shape		
Height		

New 2025 Edition 2

Wall & Ceiling LED

12130D/W/V

White

Aluminium

Circular

85mm

Diameter	200mm
Surface Ceiling	Yes
Indoor	Yes
Adjustable	No
Electrical Characteristics	
Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	30W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
IP Rating	IP44
Light Source	LED built in
LED Type	SMD
F Mark	F
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes

Output	750mA	
IP Rating	IP20	
Dimmable	No	
umination Data		
Colour Temperature	3000K-4000K-5000K	
Lumen Output	3000lm	
Light Efficiency	100lm/W	

90

90°

19

Packir	na Ir	nfo

UGR

CRI

Beam Angle

Illumination Diagram

 Box Weight
 1.125kg

 Pcs/Carton
 12

 Barcode
 5291889082828

 HS Code
 9405413990

Certification & Warranty

Warranty 5 years



