

08 Strips & Profiles > 24V Linkable Modules Aluminium

## 38001A/RGB



1W LED Linkable module, IP20 .

Requires 24V DC constant voltage LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

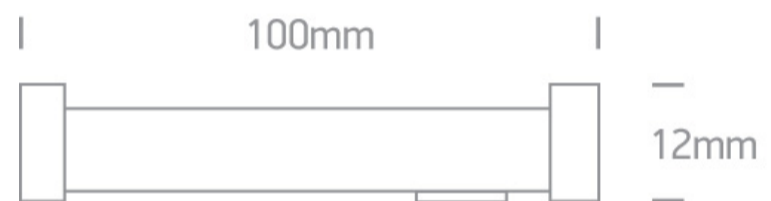

Accessories



38006C



38006C



38007C



38007C

Physical Specification

Item Group

08 Strips & Profiles

Family

24V Linkable Modules Aluminium

Order Code

38001A/RGB

Material

Aluminium

Shape

Rectangular



Length

100mm

|                 |      |
|-----------------|------|
| Width           | 12mm |
| Height          | 5m   |
| Surface Ceiling | Yes  |
| Surface Wall    | Yes  |
| Indoor          | Yes  |

## Electrical Characteristics

### Fitting

|               |   |
|---------------|---|
| Input Type    | Constant Voltage  |
| Input Voltage | 24V DC  |
| Safety Class  |  |
| Power(Watts)  | 1W  |
| IP Rating     | IP20  |
| Light Source  | LED built in  |
| LED Type      | SMD   |
| F Mark        |  |

## Illumination Data

|                      |   |
|----------------------|---|
| Colour Temperature   | RGB   |
| Illumination Diagram |  |

## Packing Info

|            |               |
|------------|---------------|
| Pcs/Carton | 100           |
| Barcode    | 5291889019121 |
| HS Code    | 9405104090    |

Warranty

3 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

