


11 Office & Kitchen>Up & Down LED Linear Profiles

38140AU/W/C

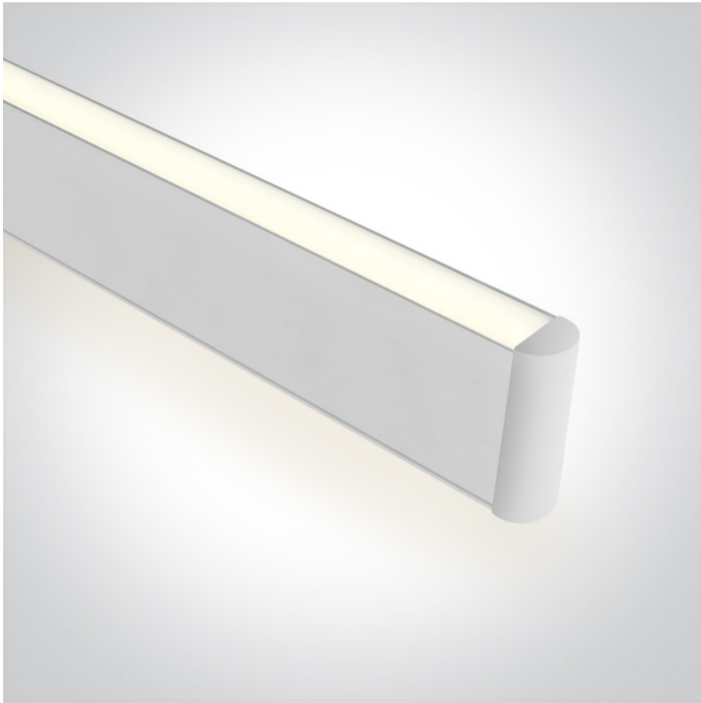

40W suspended linear diffuser with uplight, ideal for offices.

Complete with 900mA driver and 3m suspension kit.

Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions



Gallery





Physical Specification


Item Group	11 Office & Kitchen
Family	Up & Down LED Linear Profiles
Order Code	38140AU/W/C
Colour	White
Material	Aluminium
Diffuser Material	Plastic
Shape	Rectangular

Length	1175mm
Width	22mm
Height	85mm
Suspended Ceiling	Yes
Indoor	Yes
Adjustable	No


Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	900mA
Voltage	40V
Power(Watts)	36W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar

LED Number	144 Up 288 Down
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	27-38W
Power Factor	0,95
Constant Current	Yes
900mA	30-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Metal
Output Terminal	Connector
Brand	BOKE

Illumination Data

Colour Temperature	4000K
Lumen Output	3600lm
Light Efficiency	90lm/W
CRI	90
Illumination Diagram	

Packing Info

Box Weight	2.058kg
Pcs/Carton	12
Barcode	5291889063926
HS Code	9405413990

Warranty

3 years

switch to
one light!

one
LIGHT

