

11 Office & Kitchen>Recessed LED Linear Profiles

## 38150BR/W/W



40W UGR17 Recessed linear with diffuser, ideal for offices.

Complete with 1000mA driver , 4pcs fixing clips, 4pcs connectors & 2pcs end cups.

Can be connected in line


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

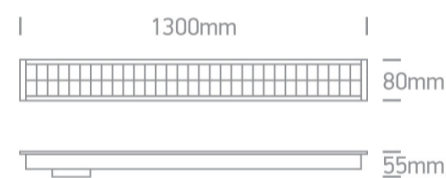

### Gallery



### Physical Specification

Item Group

11 Office & Kitchen

Family

Recessed LED Linear Profiles

Order Code

38150BR/W/W

Colour

White

Material

Aluminium

Diffuser Material



Plastic

Shape

Rectangular

Length	1300mm
Width	80mm
Height	55mm
Cutout Hole Width	1280mm
Cutout Hole Length	68mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	No


#### Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	1000mA
Voltage	36V
Power(Watts)	36W
IP Rating	IP20
Light Source	LED built in

LED Type	SMD 3030
LED Brand	Osram
LED Number	96

## Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	30-42W
Power Factor	0,95
Constant Current	Yes
1000mA	30-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Metal
Output Terminal	Connector
Brand	ATG

## Illumination Data

Colour Temperature	3000K
Lumen Output	4000lm
Light Efficiency	100lm/W
CRI	90
Beam Angle	34°
Illumination Diagram	
Dark Light	Yes
UGR	17

## Packing Info

Box Weight	2.483kg
Pcs/Carton	12
Barcode	5291889063827
HS Code	9405409900

#### Certification & Warranty

Warranty	3 Years
Weee Directive	Yes

switch to  
**one light!**

one  
LIGHT

