

New 2025 Edition 2>Office & Kitchen

38150C/B/V



CCT and Power variable 40W UGR19 Linear system with diffuser for surface or suspended installation, ideal for offices.

Complete with power variable driver


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

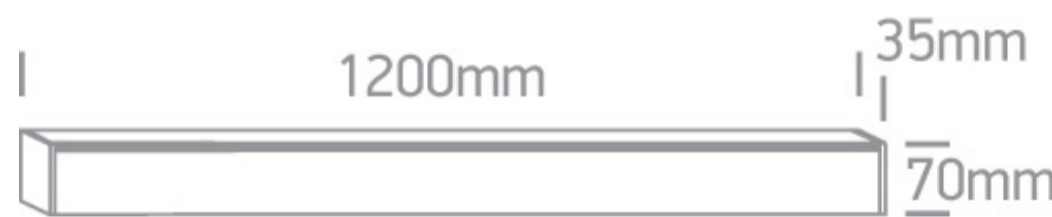

Gallery



Accessories



050170



050170C/B

Related items





38150E/B

Physical Specification

Item Group	New 2025 Edition 2
Family	Office & Kitchen
Order Code	38150C/B/V
Colour	Black
Material	Aluminium
Shape	Rectangular
Length	1200mm
Width	35mm
Height	70mm
Surface Ceiling	Yes
Suspended Ceiling	Yes
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	20W-30W-40W
IP Rating	IP20

Light Source	LED built in
Dimmable	No
Cable Length	300cm
F Mark	


Fitting

Input Type	Constant Current
IP Rating	IP20
Light Source	LED built in
LED Type	SMD
LED Number	24Leds + Diffuser

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
IP Rating	IP20
Dimmable	No
Protection	0

Illumination Data

Colour Temperature	3000K-4000K-5000K
Lumen Output	3400lm (40w)
Light Efficiency	85lm/W
CRI	90
Illumination Diagram	
UGR	19

Packing Info

Pcs/Carton

12

Barcode

5291889082538

HS Code

9405413990

Certification & Warranty

Warranty

3 years

switch to
one light!

one
LIGHT

