

New 2025 Edition 2>Office & Kitchen

## 38152R/W/V



CCT and Power variable 40W recessed linear fitting with diffuser, ideal for offices.

Complete with power variable driver.

Complies with standard EN60598-1 and any other specific standards.




### Downloads



### Dimensions



### Gallery

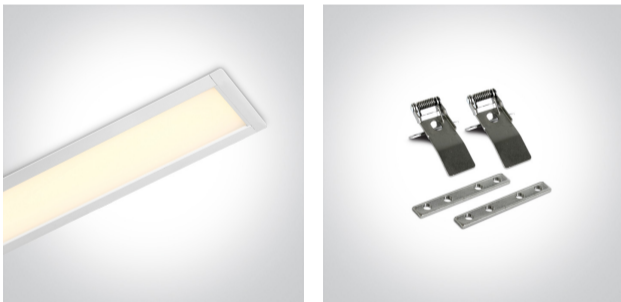

### Related items



38152RC/W/V

### Physical Specification

Item Group



New 2025 Edition 2

Family

Office & Kitchen

Order Code	38152R/W/V
Colour	White
Material	Aluminium
Shape	Rectangular
Length	1210mm
Width	70mm
Height	60mm
Cutout Hole Width	60mm
Cutout Hole Length	1200mm
Recessed Ceiling	Yes
Depth Required	80mm
Indoor	Yes
Adjustable	No


#### Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	20W-30W-40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
IP Rating	IP20

Light Source	LED built in
LED Type	SMD
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
IP Rating	IP20
Dimmable	No

### Illumination Data

Colour Temperature	3000K-4000K-5000K
Lumen Output	3600lm (40W)
Light Efficiency	90lm/W
CRI	90
Beam Angle	120°
Illumination Diagram	

### Packing Info

Box Weight	2.366kg
Pcs/Carton	12
Barcode	5291889082576
HS Code	9405413990

### Certification & Warranty

switch to  
**one light!**

one  
LIGHT

