

New 2025 Edition 2>Office & Kitchen

38160A/B/V



CCT and Power variable 40W UGR19 Linear system with diffuser for surface or suspended installation, ideal for offices.

Complete with power variable driver.


Complies with standard EN60598-1 and any other specific standards



Downloads



Dimensions

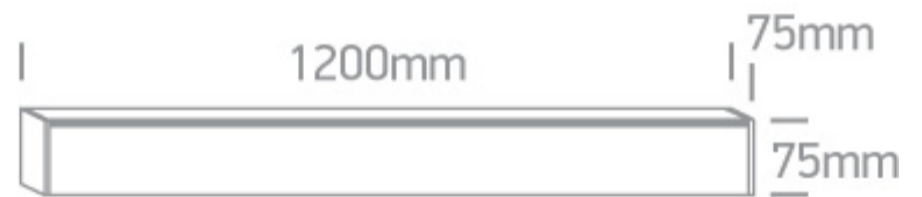

Gallery



Accessories





050170

Physical Specification

Item Group	New 2025 Edition 2
Family	Office & Kitchen
Order Code	38160A/B/V
Colour	Black
Material	Aluminium
Diffuser Material	PC
Shape	Rectangular
Length	1200mm
Width	75mm
Height	75mm
Surface Ceiling	Yes
Suspended Ceiling	Yes
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	Built In
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	20W-30W-40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
Cable Length	300cm
F Mark	

Fitting

Input Type

Constant Current

IP Rating

IP20

Light Source

LED built in

LED Type

SMD

Gear

Gear Type

Led Driver

Input Voltage

220-240V

50 Hz

Yes

60 Hz

Yes

IP Rating

IP20

Dimmable

No

Illumination Data

Colour Temperature

3000K-4000K-5000K

Lumen Output

3400lm (40W)

Light Efficiency

85lm/W

CRI

90

Illumination Diagram



UGR

19

Packing Info

Pcs/Carton

12

Barcode

5291889082590

HS Code

9405413990

Certification & Warranty

switch to
one light!

one
LIGHT

