


21 Industrial & Floodlights>The Supermarket LED Linear Range Aluminium + PC

## 38236R/C

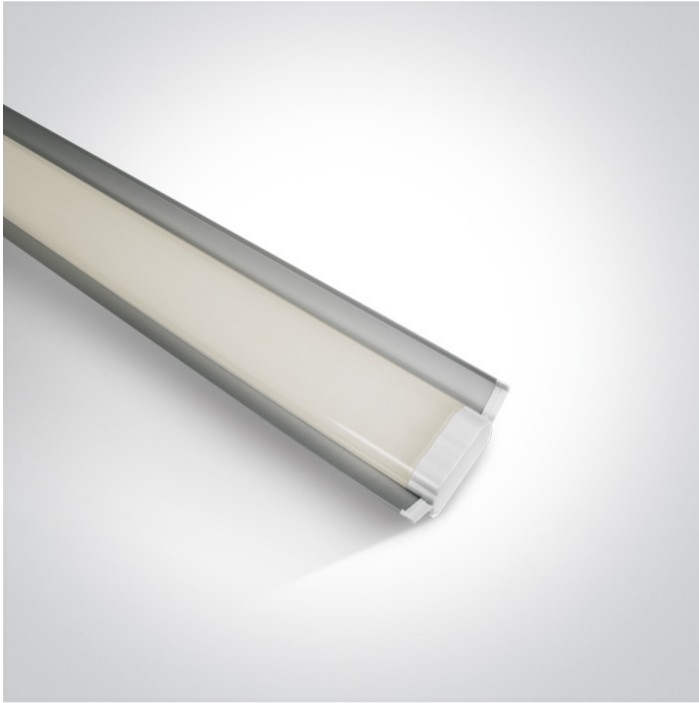

LED linear, ideal for supermarket applications. It can replace fluorescent fittings mounted on cable channels.

Supplied with 100-240V LED driver as standard.

Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions



### Physical Specification

Item Group	21 Industrial & Floodlights
Family	The Supermarket LED Linear Range Aluminium + PC
Order Code	38236R/C
Colour	Grey
Material	Die Cast
Diffuser Material	Glass
Shape	Rectangular
Length	1200mm
Width	105mm
Height	40mm
Surface Ceiling	Yes
Indoor	Yes

Adjustable

No

## Electrical Characteristics

Gear

Built In

### Fitting + Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Safety Class



Power(Watts)

43W

IP Rating

IP20

Light Source

LED built in

Dimmable

No

Cable Length

100cm

F Mark



### Fitting

Input Type

Constant Current

Input Current

1120mA

Voltage

38V

Power(Watts)

42W

IP Rating

IP20

Light Source

LED built in

LED Type

COB

LED Brand

Hongli

Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz	Yes
Power(Watts)	34-46W
Power Factor	0,9
Constant Current	Yes
Output	1120mA
Voltage Range	30-41V
IP Rating	IP20


### Illumination Data

Colour Temperature	4000K
Lumen Output	3800lm
Light Efficiency	88,4m/W
CRI	80
Beam Angle	120°
Illumination Diagram	

### Packing Info

Box Weight	1,7Kg
Pcs/Carton	10
Barcode	5291889037156
HS Code	9405409900

### Energy Label

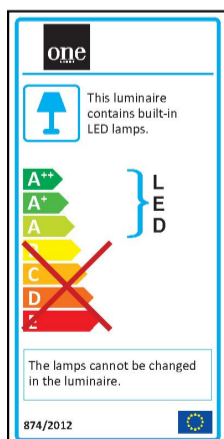

Warranty

2 Years

Weee Directive

Yes

switch to  
**one light!**

one  
LIGHT

