

02 Recessed Spots Fixed LED>The Cement Look Recessed Cement + black reflector

50104M/W



4,5W Stone look Recessed LED spot.

Complete with 350mA driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

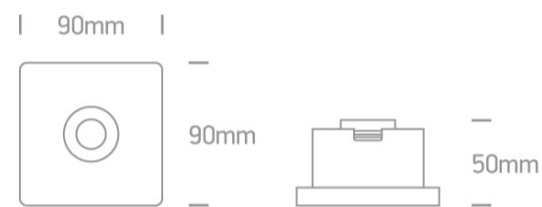

Gallery






Physical Specification

Item Group	02 Recessed Spots Fixed LED
Family	The Cement Look Recessed Cement + black reflector
Order Code	50104M/W
Colour	Cement
Material	Cement
Shape	Rectangular
Length	90mm

Width	90mm
Height	50mm
Cutout Hole Diameter	72mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	4,5W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	350mA
Voltage	8,6V
Safety Class	
Power(Watts)	3W
IP Rating	IP20
Light Source	LED built in
LED Brand	Bridgelux

LED Number

1

F Mark



Gear

Gear Type

Led Driver

Input Voltage

100-240V

50 Hz

Yes

60 Hz

Yes

Power(Watts)

4,2W

Power Factor

0,5

Constant Current

Yes

350mA

2,8-12V

IP Rating

IP20

Safety Class



Dimmable

No

Ambient Temp

50°C

Operating Temp

75°C

Housing Material

Plastic

Output Terminal

Cable

Brand

Eaglerise

Illumination Data

Colour Temperature

3000K

Lumen Output

350lm

Light Efficiency

77,77lm/W

CRI

90

Beam Angle

40°

Illumination Diagram



Dark Light

Yes

Packing Info

Box Length	15,5cm
Box Width	14,5cm
Box Height	12cm
Box Weight	0,488kg
Pcs/Carton	18
Barcode	5291889056102
HS Code	9405409900

Certification & Warranty

Warranty	3 Years
Weee Directive	Yes

switch to
one light!

one
LIGHT

