

06 Downlights Fixed LED > The 16-30W Square Recessed Panels CCT V

50116FA/W/V



CCT Variable 16W slim downlight LED, IP20, ideal for commercial applications such as offices, galleries and showrooms.

Supplied with 400mA non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.




Downloads



Dimensions



Gallery

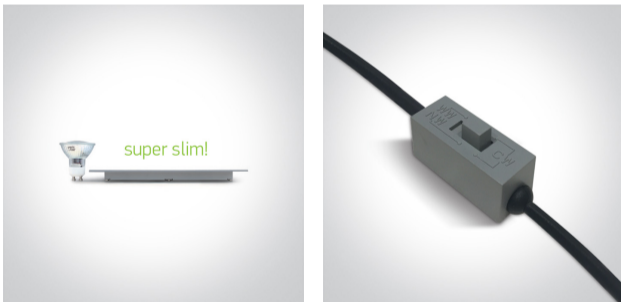

Related items



89024UT

Physical Specification

Item Group



06 Downlights Fixed LED

Family


The 16-30W Square Recessed Panels CCT V

Order Code	50116FA/W/V
Colour	White
Material	Die Cast
Diffuser Material	Acrylic
Shape	Rectangular
Length	173mm
Width	173mm
Height	22mm
Cutout Hole Width	155mm
Cutout Hole Length	155mm
Recessed Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No


Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	16W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current

Input Current	400mA
Safety Class	
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
LED Number	120

Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	10-16W
Constant Current	Yes
400mA	25-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	50°C
Operating Temp	75°C
Housing Material	Plastic
Brand	Lifud

Illumination Data

Colour Temperature	3000K-4000K-5700K
Lumen Output	1600lm
Light Efficiency	100lm/W
CRI	80
Beam Angle	120°
Illumination Diagram	

Packing Info

Pcs/Carton

20

Barcode

5291889078975

HS Code

9405119090

Certification & Warranty

Warranty

3 years

Weee Directive

Yes

switch to
one light!

one
LIGHT

