

06 Downlights Fixed LED>UGR19 Office Range

## 50125UV/W/V



25W SMD LED UGR19 downlight with adjustable CCT, IP44.

Complete with 500mA driver.


Complies with standard EN60598-1 and any other specific standards.




### Downloads



### Dimensions

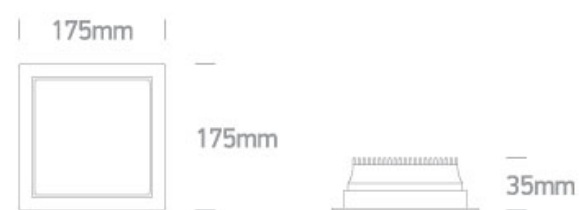

### Gallery






### Physical Specification

Item Group	06 Downlights Fixed LED
Family	UGR19 Office Range
Order Code	50125UV/W/V
Colour	White
Material	Die Cast
Shape	Rectangular
Length	175mm

Width	175mm
Height	35mm
Cutout Hole Width	160mm
Cutout Hole Length	160mm
Recessed Ceiling	Yes
Depth Required	70mm
Indoor	Yes
Adjustable	No


## Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	25W
IP Rating	IP44
Light Source	LED built in
Dimmable	No
F Mark	


Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	40,5V
Safety Class	
Power(Watts)	22,5W
IP Rating	IP44
Light Source	LED built in

LED Type	SMD 2835
LED Brand	Epistar
F Mark	

## Gear

Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	12,5-20W
Power Factor	0,9
Constant Current	Yes
500mA	25-40V
IP Rating	IP44
Safety Class	
Dimmable	No
Housing Material	Plastic
Output Terminal	Cable
Brand	Lifud
Protection	Short Circuit and Overload

## Illumination Data

Colour Temperature	3000K-4000K-6000K
Lumen Output	2750lm
Light Efficiency	110lm/W
CRI	80
Illumination Diagram	
UGR	19

## Packing Info

Box Weight	0.710kg
Pcs/Carton	20
Barcode	5291889075196
HS Code	9405413990

#### Certification & Warranty

Warranty	3 years
----------	---------

switch to  
**one light!**

one  
LIGHT

