

06 Downlights Fixed LED>The Rectangular Panels 1200x300mm

50148RE/W/D



120x30 recessed LED panel for T-rail false ceilings. Can be recessed or suspended. Uniform lighting, ideal for commercial applications.

Requires 1200mA LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

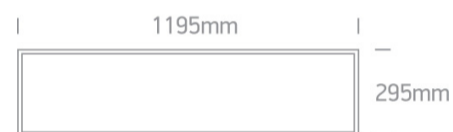

Related items



050017



050108



89048



89048T


Physical Specification

Item Group	06 Downlights Fixed LED
Family	The Rectangular Panels 1200x300mm
Order Code	50148RE/W/D
Colour	White
Material	Aluminium
Diffuser Material	Acrylic
Shape	Rectangular


Length	1195mm
Width	295mm
Height	20mm
Recessed T-Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No

Electrical Characteristics

Fitting

Input Type	Constant Current
Input Current	1200mA
Voltage	38V
Safety Class	
Power(Watts)	48W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Epistar
LED Number	240

Illumination Data

Colour Temperature	6000K
Lumen Output	4100lm
Light Efficiency	85,41lm/W
CRI	80
Beam Angle	120°
Illumination Diagram	

Packing Info

Box Weight

2.725kg

Pcs/Carton

4

Barcode

5291889041986

HS Code

9405119090

Certification & Warranty

Warranty

2 years

Weee Directive

Yes

switch to
one light!

one
LIGHT

