


06 Downlights Fixed LED>The Rectangular Panels Aluminium

## 50160E/W/D

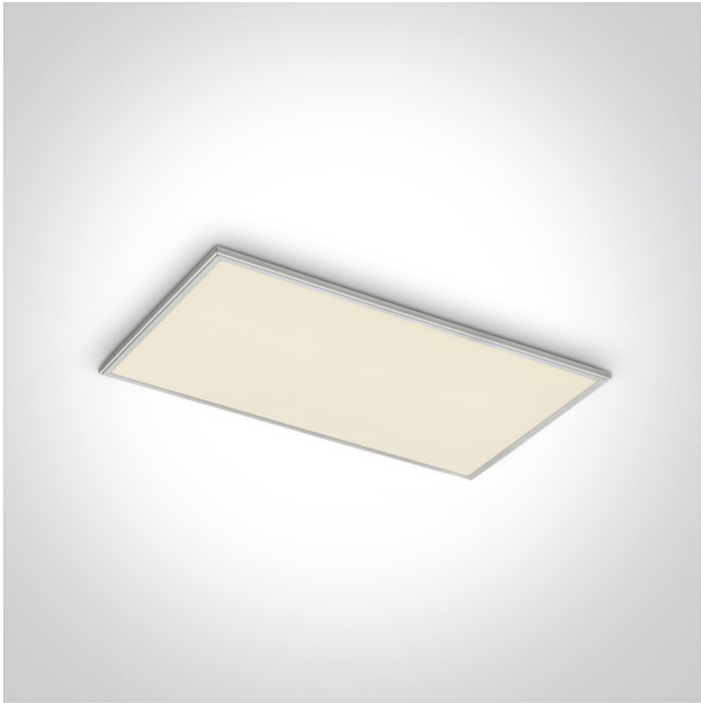

120x60 recessed LED panel for T-rail false ceilings. Can be recessed or suspended. Uniform lighting, ideal for commercial applications.

Requires 1300mA LED driver.


Complies with standard EN60598-1 and any other specific standards.



### Downloads



### Dimensions

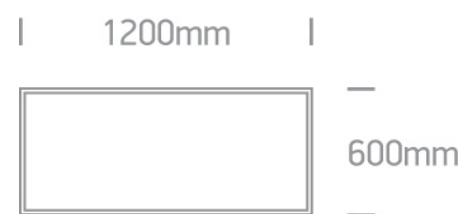

### Must be ordered separately




89060

### Accessories



050017



050108

## Physical Specification


Item Group	06 Downlights Fixed LED
Family	The Rectangular Panels Aluminium
Order Code	50160E/W/D
Colour	White
Material	Aluminium
Diffuser Material	Acrylic
Shape	Rectangular
Length	1195mm
Width	595mm
Height	20mm
Recessed T-Ceiling	Yes
Depth Required	50mm
Indoor	Yes
Adjustable	No

## Electrical Characteristics

### Fitting

Input Type	Constant Current
Input Current	1300mA
Voltage	41V
Safety Class	III
Power(Watts)	60W
IP Rating	IP20
Light Source	LED built in
LED Type	SMD 2835
LED Brand	Sanan

## Illumination Data

Colour Temperature	6000K
Lumen Output	4900lm
Light Efficiency	81,67lm/W
CRI	80
Beam Angle	120°
Illumination Diagram	

### Packing Info

Box Length	125cm
Box Width	64cm
Box Height	5cm
Box Weight	5,6Kg
Pcs/Carton	2
Barcode	5291889041665
HS Code	9405109890

### Certification & Warranty

Warranty	2 Years
Average Lifetime	30000 hours
Weee Directive	Yes

switch to  
**one light!**

**one**  
LIGHT

