




Product Datasheet

07 Downlights Adjustable LED>The COB Box Type Shop Range

51120/G/W

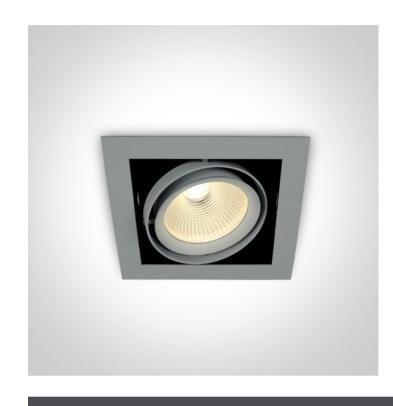

20W COB LED Recessed adjustable downlight, COB square range, IP20.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.



Downloads










Dimensions



Gallery





Physical Specification

Item Group	07 Downlights Adjustable LED
Family	The COB Box Type Shop Range
Order Code	51120/G/W
Colour	Grey
Material	Aluminium
Shape	Rectangular
Length	190mm

Width	190mm
Height	100mm
Cutout Hole Width	165mm
Cutout Hole Length	165mm
Recessed Ceiling	Yes
Depth Required	140mm
Indoor	Yes
Adjustable	2 Directions
Electrical Characteristics	
Gear	External-Included
Fitting , Driver	
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	20W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	500mA
Voltage	37,3V
Safety Class	ŢIII>
Power(Watts)	18,65W
IP Rating	IP20
Light Source	LED built in

LED Type	COB
LED Brand	Sanan
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	13,5-21W
Power Factor	0,9
Constant Current	Yes
500mA	27-42V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Illumination Data	
	3000K
Colour Temperature	3000K
Colour Temperature Lumen Output	1400lm
Colour Temperature Lumen Output Light Efficiency	1400lm 70lm/W
Colour Temperature Lumen Output Light Efficiency CRI	1400lm 70lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	1400lm 70lm/W
Colour Temperature Lumen Output Light Efficiency CRI	1400lm 70lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1400lm 70lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle	1400lm 70lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1400lm 70lm/W 80
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram	1400lm 70lm/W 80 36°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length	1400lm 70lm/W 80 36°
Colour Temperature Lumen Output Light Efficiency CRI Beam Angle Illumination Diagram Packing Info Box Length Box Width	1400lm 70lm/W 80 36° 23cm

Pcs/Carton	12
Barcode	5291889041108
HS Code	9405409900

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes



