

07 Downlights Adjustable LED>The COB Shop Downlights Pro Die cast

51125A/W/W



25W COB LED Recessed adjustable downlight, shop range, IP20.

Supplied with non-dimmable LED driver.


Complies with standard EN60598-1 and any other specific standards.



Downloads



Dimensions

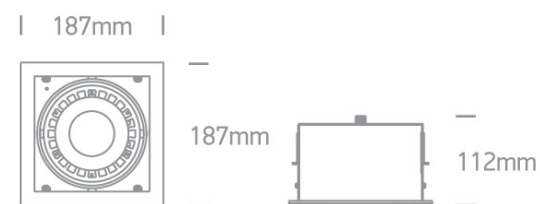

Gallery






Physical Specification


Item Group	07 Downlights Adjustable LED
Family	The COB Shop Downlights Pro Die cast
Order Code	51125A/W/W
Colour	White
Material	Die Cast
Shape	Rectangular
Length	187mm

Width	187mm
Height	112mm
Cutout Hole Width	165mm
Cutout Hole Length	165mm
Recessed Ceiling	Yes
Depth Required	130mm
Indoor	Yes
Adjustable	2 Directions


Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	25W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	

Fitting	
Input Type	Constant Current
Input Current	700mA
Voltage	35V
Safety Class	
Power(Watts)	24,5W
IP Rating	IP20
Light Source	LED built in

LED Type	COB
LED Brand	Epistar
Gear	
Gear Type	Led Driver
Input Voltage	100-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	19,6-30,4W
Power Factor	0,9
Constant Current	Yes
700mA	28-43V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	70°C
Operating Temp	40°C
Housing Material	Plastic
Brand	Lifud

Illumination Data

Colour Temperature	3000K
Lumen Output	2300lm
Light Efficiency	92lm/W
CRI	80
Beam Angle	40°
Illumination Diagram	

Packing Info

Box Length	20,5cm
------------	--------

Box Width	19,5cm
Box Height	13,5cm
Box Weight	1,9kg
Pcs/Carton	8
Barcode	5291889039402
HS Code	9405409900

Certification & Warranty

Warranty	2 Years
Weee Directive	Yes

switch to
one light!

one
LIGHT

