




## **Product Datasheet**

07 Downlights Adjustable LED>The Box Type Shop Range

51140/B/C

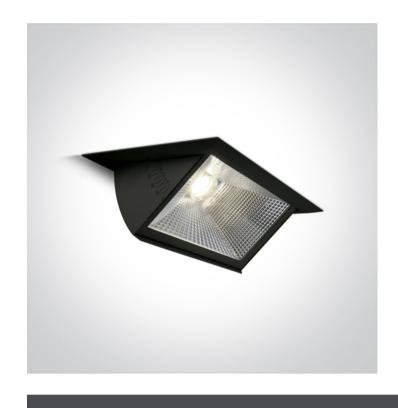

40W COB LED Recessed adjustable downlight, COB square range, IP20.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.











Downloads









Dimensions



## **Physical Specification**

Item Group	07 Downlights Adjustable LED
Family	The Box Type Shop Range
Order Code	51140/B/C
Colour	Black
Material	Aluminium
Shape	Rectangular
Length	235mm
Width	145mm
Height	110mm
Cutout Hole Width	220mm
Cutout Hole Length	130mm
Recessed Ceiling	Yes

Depth Required	140mm
Indoor	Yes
Adjustable	1 Direction
Electrical Characteristics	
Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No
F Mark	F
Fitting	
Input Type	Constant Current
Input Current	1050mA
Voltage	35V
Safety Class	
Power(Watts)	37W
IP Rating	IP20
Light Source	LED built in
LED Type	СОВ
LED Brand	Sanan
Gear	
Gear Type	Led Driver

Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	34,65-42W
Power Factor	0,9
Constant Current	Yes
1050mA	33-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Housing Material	Plastic
Brand	Lifud
Ilumination Data	
	100014
Ilumination Data  Colour Temperature	4000K
Colour Temperature  Lumen Output	4000K 3500lm
Colour Temperature	
Colour Temperature  Lumen Output	3500lm
Colour Temperature  Lumen Output  Light Efficiency	3500lm 87,5lm/W
Colour Temperature  Lumen Output  Light Efficiency  CRI	3500lm 87,5lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle	3500lm 87,5lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	3500lm 87,5lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	3500lm 87,5lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle	3500lm 87,5lm/W 80
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	3500lm 87,5lm/W 80 70°
Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram	3500lm 87,5lm/W 80 70°

## Certification & Warranty

Warranty	2 Years
Weee Directive	Yes



