




## **Product Datasheet**

07 Downlights Adjustable LED>The COB Box Type Shop Range

51140/B/W

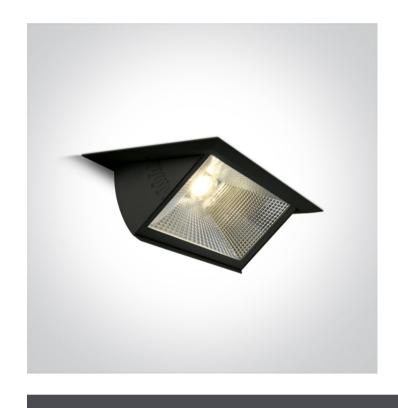

40W COB LED Recessed adjustable downlight, COB square range, IP20.

Supplied with non-dimmable LED driver.

Complies with standard EN60598-1 and any other specific standards.











#### Downloads










#### Dimensions



#### **Physical Specification**

| Item Group         | 07 Downlights Adjustable LED |
|--------------------|------------------------------|
| Family             | The COB Box Type Shop Range  |
| Order Code         | 51140/B/W                    |
| Colour             | Black                        |
| Material           | Aluminium                    |
| Shape              | Rectangular                  |
| Length             | 235mm                        |
| Width              | 145mm                        |
| Height             | 110mm                        |
| Cutout Hole Width  | 220mm                        |
| Cutout Hole Length | 130mm                        |
| Recessed Ceiling   | Yes                          |
|                    |                              |

| Depth Required             | 140mm             |
|----------------------------|-------------------|
| Indoor                     | Yes               |
| Adjustable                 | 1 Direction       |
|                            |                   |
| Electrical Characteristics |                   |
|                            |                   |
| Gear                       | External-Included |
| Fitting + Driver           |                   |
|                            |                   |
| Input Voltage              | 220-240V          |
| 50 Hz                      | Yes               |
| 60 Hz                      | Yes               |
| Safety Class               |                   |
| Power(Watts)               | 40W               |
| IP Rating                  | IP20              |
| Light Source               | LED built in      |
| Dimmable                   | No                |
| F Mark                     | F                 |
|                            |                   |
| Fitting                    |                   |
| Input Type                 | Constant Current  |
| Input Current              | 1050mA            |
| Voltage                    | 35V               |
| Safety Class               |                   |
| Power(Watts)               | 37W               |
| IP Rating                  | IP20              |
| Light Source               | LED built in      |
| LED Type                   | СОВ               |
| LED Brand                  | Sanan             |
|                            |                   |
| Gear                       |                   |
| Gear Type                  | Led Driver        |

| Input Voltage  | 220-240V                                      |
|--|---|
| 50 Hz  | Yes   |
| 60 Hz  | Yes   |
| Power(Watts)   | 34,65-42W                                     |
| Power Factor   | 0,9   |
| Constant Current   | Yes   |
| 1050mA   | 33-40V  |
| IP Rating  | IP20  |
| Safety Class   |   |
| Dimmable   | No  |
| Housing Material   | Plastic                                       |
| Brand  | Lifud   |
|  |   |
| Ilumination Data   |   |
|  |   |
|  |   |
| Colour Temperature   | 3000K   |
|  | 3000K<br>3400lm                               |
| Colour Temperature   |   |
| Colour Temperature  Lumen Output   | 3400lm  |
| Colour Temperature  Lumen Output  Light Efficiency   | 3400lm<br>85lm/W                              |
| Colour Temperature  Lumen Output  Light Efficiency  CRI  | 3400lm<br>85lm/W<br>80                        |
| Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  | 3400lm<br>85lm/W<br>80                        |
| Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  | 3400lm<br>85lm/W<br>80                        |
| Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  | 3400lm 85lm/VV 80 70°                         |
| Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  | 3400lm<br>85lm/W<br>80                        |
| Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  | 3400lm 85lm/VV 80 70°                         |
| Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Packing Info  Box Weight                      | 3400lm 85lm/W 80 70° 1.455kg                  |
| Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Packing Info  Box Weight  Pcs/Carton          | 3400lm 85lm/W 80 70° 1.455kg                  |
| Colour Temperature  Lumen Output  Light Efficiency  CRI  Beam Angle  Illumination Diagram  Packing Info  Box Weight  Pcs/Carton  Barcode | 3400lm 85lm/W 80 70°  1.455kg 9 5291889061458 |

### Certification & Warranty

# switch to one light!

