

07 Downlights Adjustable LED>The COB Round Die cast

51140TR/W/W



40W COB LED Recessed Adjustable downlight, semi trimless, IP20.

Complete 1000mA driver.


Complies with standard EN60598-1 and any other specific standards



Downloads



Dimensions

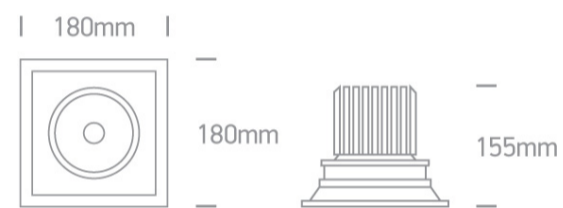

Gallery





Physical Specification



Item Group	07 Downlights Adjustable LED
Family	The COB Round Die cast
Order Code	51140TR/W/W
Colour	White
Material	Die Cast
Shape	Rectangular
Length	180mm

Width	180mm
Height	155mm
Cutout Hole Width	160mm
Cutout Hole Length	160mm
Recessed Ceiling	Yes
Depth Required	180mm
Indoor	Yes
Adjustable	2 Directions


Electrical Characteristics

Gear	External-Included
Fitting + Driver	
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Safety Class	
Power(Watts)	40W
IP Rating	IP20
Light Source	LED built in
Dimmable	No

Fitting	
Input Type	Constant Current
Input Current	1000mA
Voltage	38V
Safety Class	
Power(Watts)	38W
IP Rating	IP20
Light Source	LED built in
LED Type	COB

LED Brand	Bridgelux
LED Number	1
F Mark	
Gear	
Gear Type	Led Driver
Input Voltage	220-240V
50 Hz	Yes
60 Hz	Yes
Power(Watts)	24-40W
Power Factor	0,9
Constant Current	Yes
1000mA	24-40V
IP Rating	IP20
Safety Class	
Dimmable	No
Ambient Temp	50°C
Operating Temp	85°C
Housing Material	Plastic
Output Terminal	Connector
Brand	Eaglerise
Protection	0

Illumination Data

Colour Temperature	3000K
Lumen Output	3200lm
Light Efficiency	80lm/W
CRI	80
Beam Angle	36°
Illumination Diagram	

Packing Info

Box Weight

1.688kg

Pcs/Carton

8

Barcode

5291889044680

HS Code

9405413990

Certification & Warranty

Warranty

3 years

switch to
one light!

one
LIGHT

